

### Picture

### TECHNICAL PROPERTIES



DIN-T


Model:	DIN-T
P/N:	TI001
Power Supply:	110V or 220VAC 50/60HZ
Measure Range:	-20°C~100°C
Accuracy:	±1°C
Sensor :	NTC 10K 2m cable length
Display:	8mm 3 digit display
Function:	Temperature indicator
Weight:	88g
Package:	100 pcs/ctn



DIN-TC

Model:	DIN-TC
P/N:	TI002
Power Supply:	110V or 220VAC 50/60HZ
Measure Range:	-20°C~100°C
Accuracy:	±1°C
Sensor :	NTC 10K 2m cable length
Display:	6mm 4digit display cooling or heating 1 way output
Function:	
Weight:	175g
Package:	100 pcs/ctn

### Dimensions and technical parameters

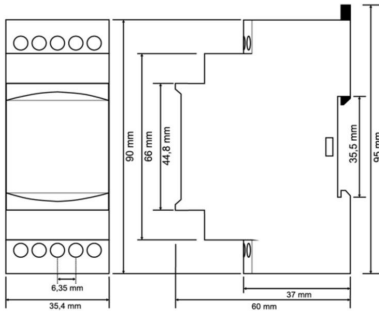

Model:	DSTS01-C
P/N:	MTC01
STATE	NORMAL OPEN
Switch temperature difference:	7K(+4K tolerance)
Aaax.Switching capacity:	250V AC,10(2)A 120V AC,15(2)A 5VDC-72VDC
Weight:	44g/pcs
IP Degree:	IP20
Carton size	33.5×20×22 cm 100pcs/carton



Model:	DSTO01-H
P/N:	MTC02
STATE	NORMAL CLOSE
Switch temperature difference:	7K(+4K tolerance)
Aaax.Switching capacity:	250V AC,10(2)A 120V AC,15(2)A 5VDC-72VDC
Weight:	44g/pcs
IP Degree:	IP20
Carton size	33.5×20×22 cm 100pcs/carton



Model:	ZR-011
P/N:	MTC03
STATE	BOTH NORMAL CLOSE AND NORMAL OPEN
Switch temperature difference:	7K(+4K tolerance)
Aaax.Switching capacity:	250V AC,10(2)A 120V AC,15(2)A 5VDC-72VDC
Weight:	44g/pcs
IP Degree:	IP20
Carton size	33.5×20×22 cm 100pcs/carton

### Dimensions and technical parameters

