



- ◆ The filter is consists of hood , filter and mainbody to protect the dust into the equipment.
- ◆ Filter panel material: ABS plastic, filtration efficiency of 73%
- ◆ Operating temperature / humidity range: (non condensing state) temperature -20 C ~+65 C, humidity 0%~95%
- ◆ Protection level: E N 60529 I P 54 (not suitable for outdoor equipment).


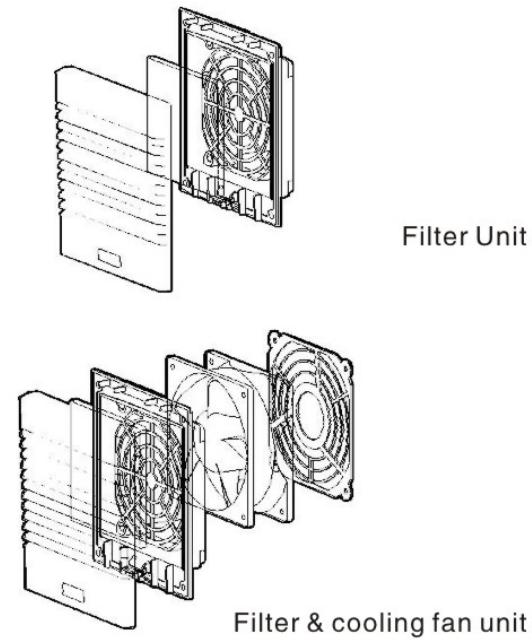



### INSTALLATION METHOD

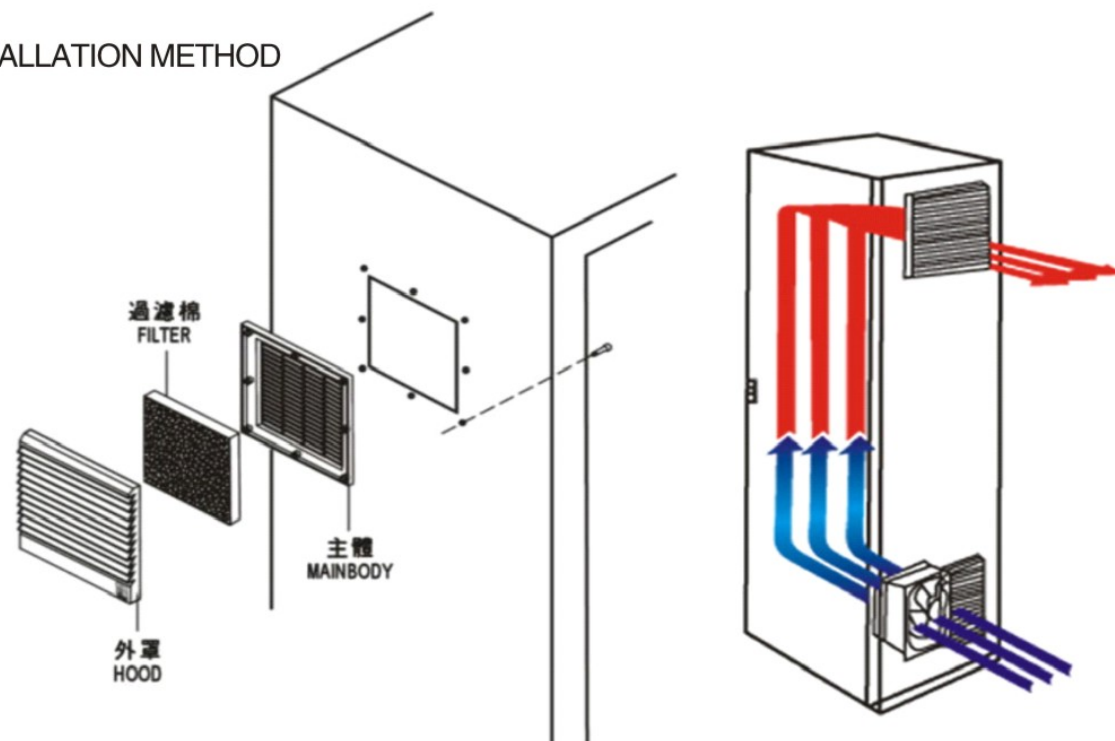

P/N	Model	Outline size	Panel hole size	Fan code	Voltage (V)	Power (W)	Freq (HZ)	Air volume m <sup>3</sup> /min	Noise (db)
PF801	ZL801	106*106*10mm	81*81mm	None	None	None	None	None	None
PF1S825L11	ZL801			AF825S11L	110v	14	50/60	30	30
PF1B825L11	ZL801			AF825B11L	110v	14		32	30
PF1S825L22	ZL801			AF825S22L	220v	16	30	30	
PF1B825L22	ZL801			AF825B22L	220v	16	32	30	



For special color please add the color code to the end of P/N

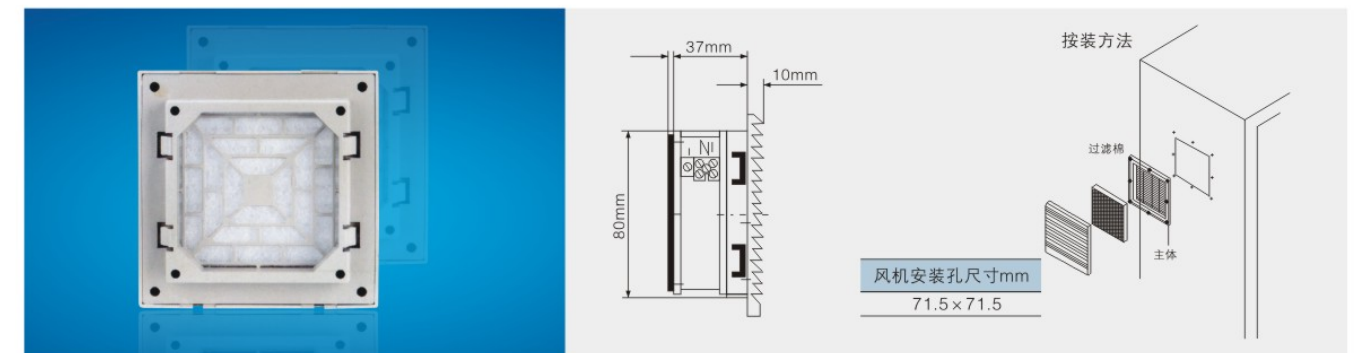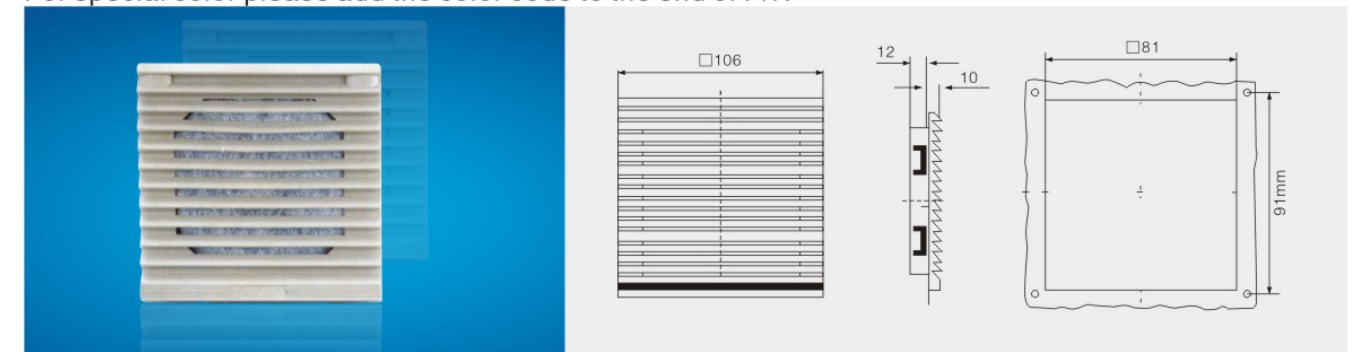

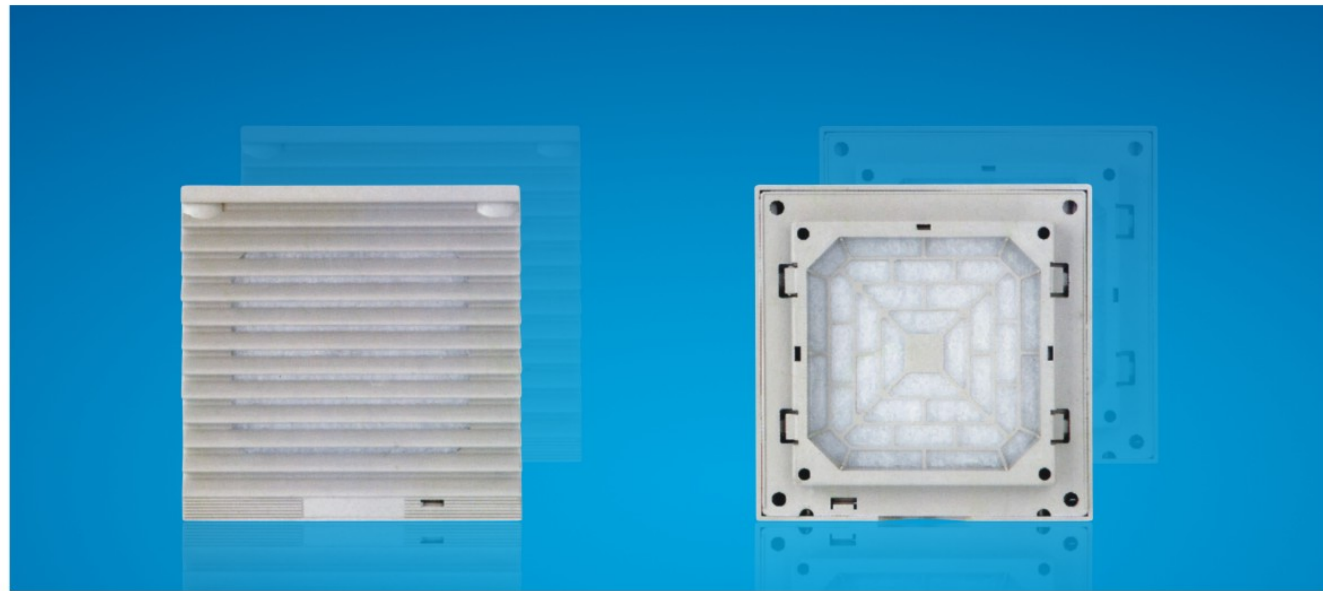



P/N	Model	Outline size	Panel hole size	Fan code	Voltage (V)	Power (W)	Freq (HZ)	Air volume m³/min	Noise (db)
PF802	ZL802	116*116*10mm	91*91mm	None	None	None	None	None	None
PF2S925L11	ZL802	116*116*10mm	91*91mm	AF925S11L	110v	13	50/60	58	32
PF2B925L11	ZL802	116*116*10mm	91*91mm	AF925B11L	110v	14	50/60	59	32
PF2S925L22	ZL802	116*116*10mm	91*91mm	AF925S22L	220v	13	50/60	58	32
PF2B925L22	ZL802	116*116*10mm	91*91mm	AF925B22L	220v	14	50/60	59	32

For special color please add the color code to the end of P/N

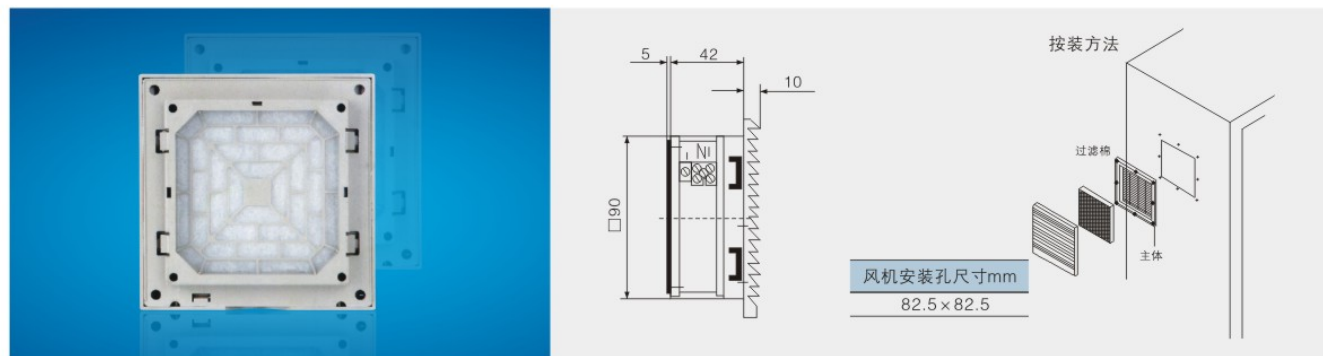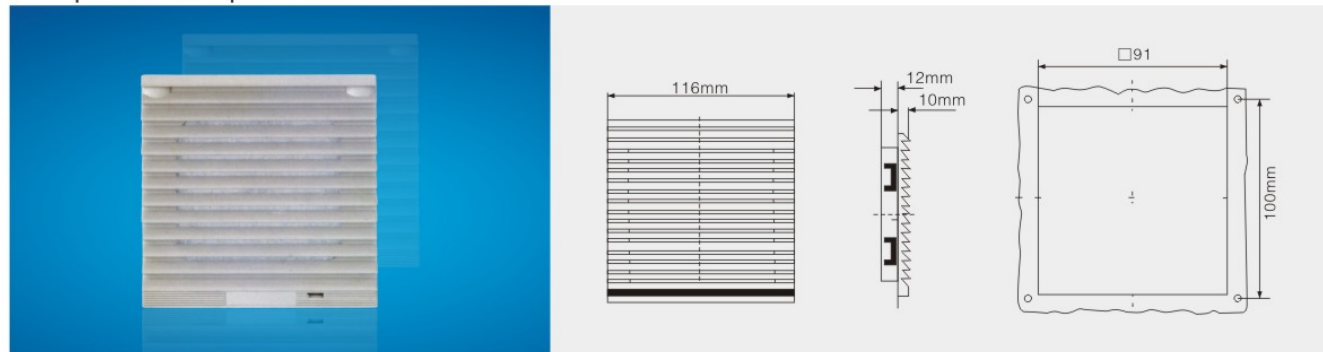

P/N	Model	Outline size	Panel hole size	Fan code	Voltage (V)	Power (W)	Freq (HZ)	Air volume m³/min	Noise (db)
PF803	ZL803	148.5*148.5*13.5mm	120*120mm	None	None	None	None	None	None
PF3S1225L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF1225S11L	110v	15	50/60	85	32
PF3B1225L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF1225B11L	110v	15	50/60	90	32
PF3S1225L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF1225S22L	220v	15	50/60	85	32
PF3B1225L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF1225B22L	220v	15	50/60	90	32
PF3S1238L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF1238S11L	110v	19	50/60	138	39
PF3B1238L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF1238B11L	110v	20	50/60	148	39
PF3S1238L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF1238S22L	220v	19	50/60	138	39
PF3B1238L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF1238B22L	220v	20	50/60	148	39
PF3S12387L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF12387S11L	110v	22	50/60	160	43
PF3B12387L11	ZL803	148.5*148.5*13.5mm	120*120mm	AF12387B11L	110v	21	50/60	172	43
PF3S12387L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF12387S22L	220v	22	50/60	160	43
PF3B12387L22	ZL803	148.5*148.5*13.5mm	120*120mm	AF12387B22L	220v	21	50/60	172	43



For special color please add the color code to the end of P/N

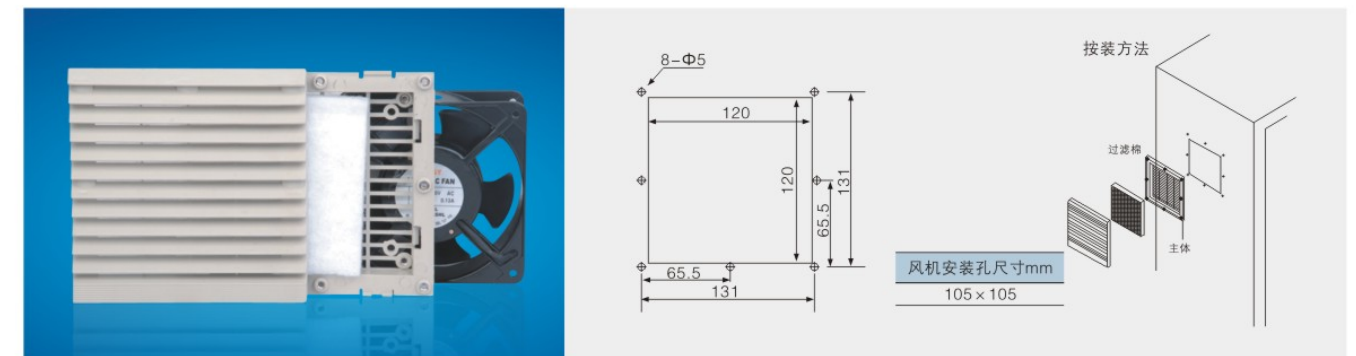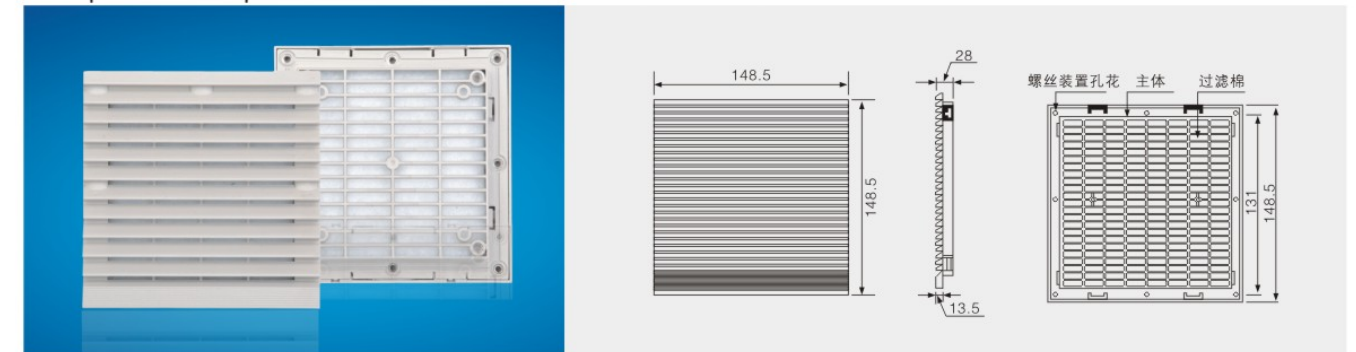





P/N	Model	Outline size	Panel hole size	Fan code	Voltage (V)	Power (W)	Freq (HZ)	Air volume m³/min	Noise (db)
PF150	ZL150	150*150*13.5mm	124*124mm	None	None	None	None	None	None
FL3S1225L11	ZL150			AF1225S11L	110v	15	50/60	85	32
FL3B1225L11	ZL150			AF1225B11L	110v	15			
FL3S1225L22	ZL150			AF1225S22L	220v	15			
FL3B1225L22	ZL150			AF1225B22L	220v	15			
FL3S1238L11	ZL150			AF1238S11L	110v	19			
FL3B1238L11	ZL150			AF1238B11L	110v	20			
FL3S1238L22	ZL150			AF1238S22L	220v	19			
FL3B1238L22	ZL150			AF1238B22L	220v	20			
FL3S12387L11	ZL150			AF12387S11L	110v	22			
FL3B12387L11	ZL150			AF12387B11L	110v	21			
FL3S12387L22	ZL150			AF12387S22L	220v	22			
FL3B12387L22	ZL150			AF12387B22L	220v	21			


For special color please add the color code to the end of P/N

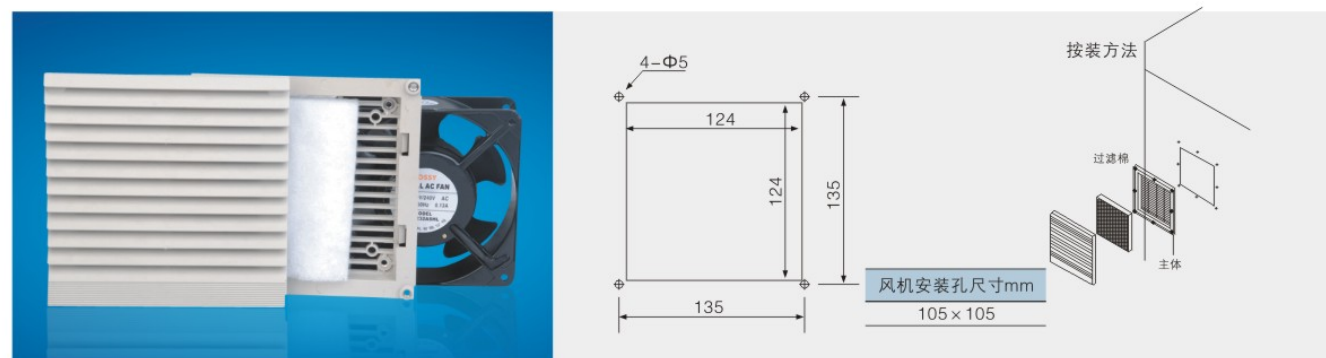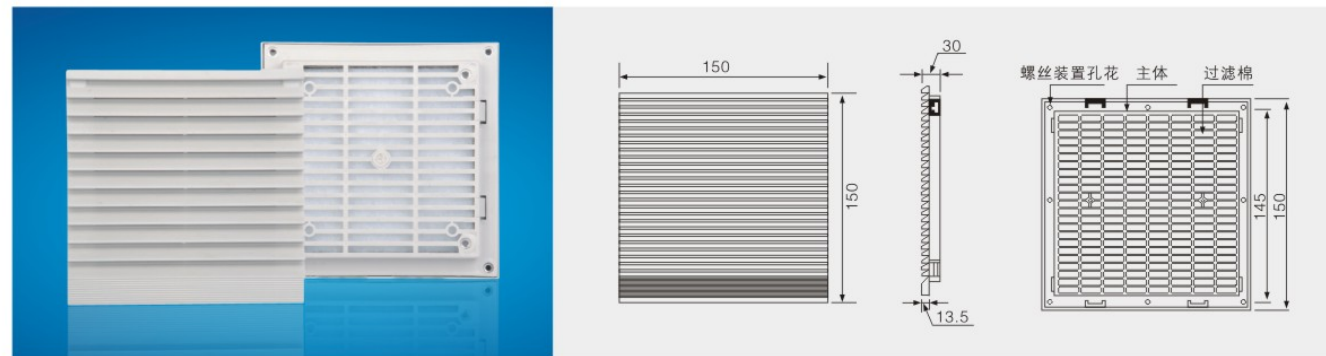

P/N	Model	Outline size	Panel hole size	Fan code	Air volume m³/min	Noise (db)
PF804	ZL804	204*204*13.5MM	172*172MM	None	None	None
PF804.1225	ZL804			with 120*120*25mm fan	85	32
PF804.1238	ZL804			with 120*120*38mm fan	138	39
PF804.1551	ZL804			with 150*150*150mm fan	330	50
PF804.1552	ZL804			with 172*150*50mm fan	330	50
PF804.1752	ZL804			with 172*172*50mm fan	330	50



For special color please add the color code to the end of P/N

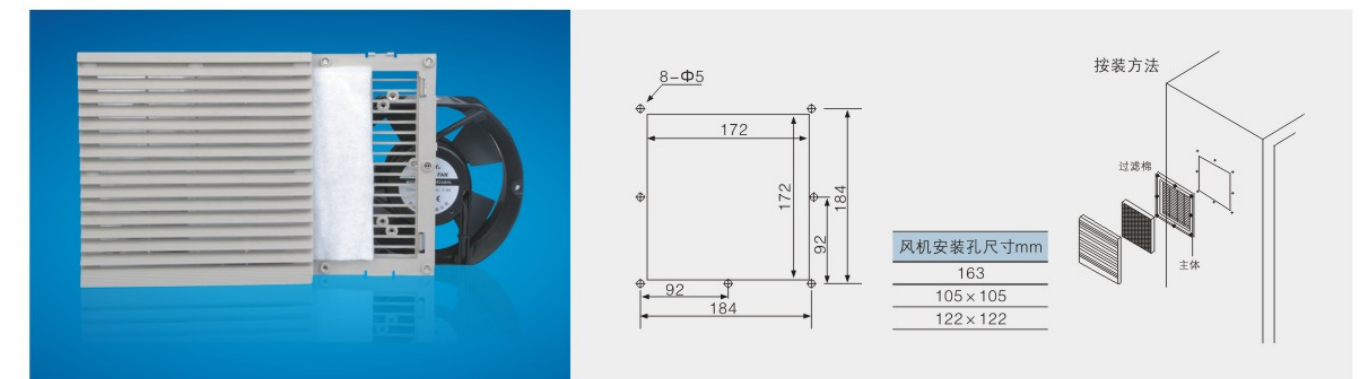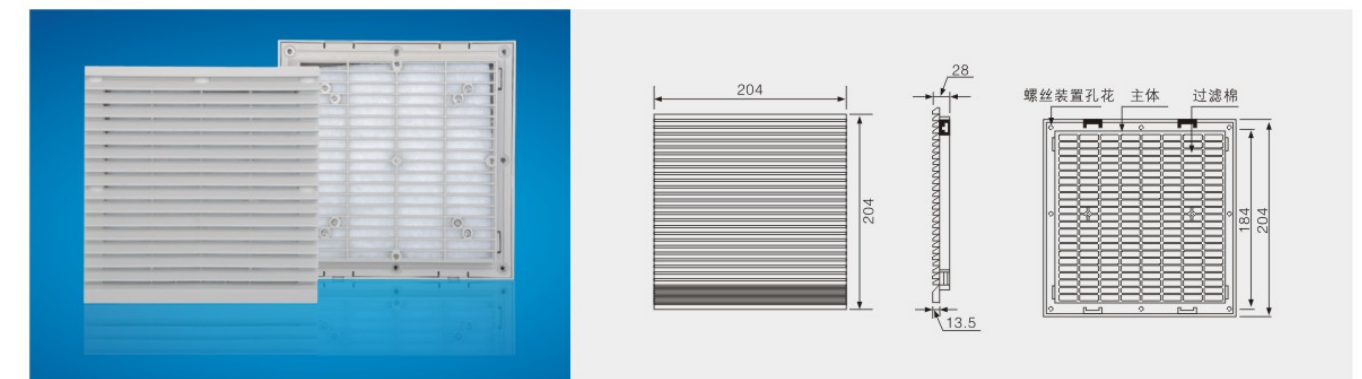

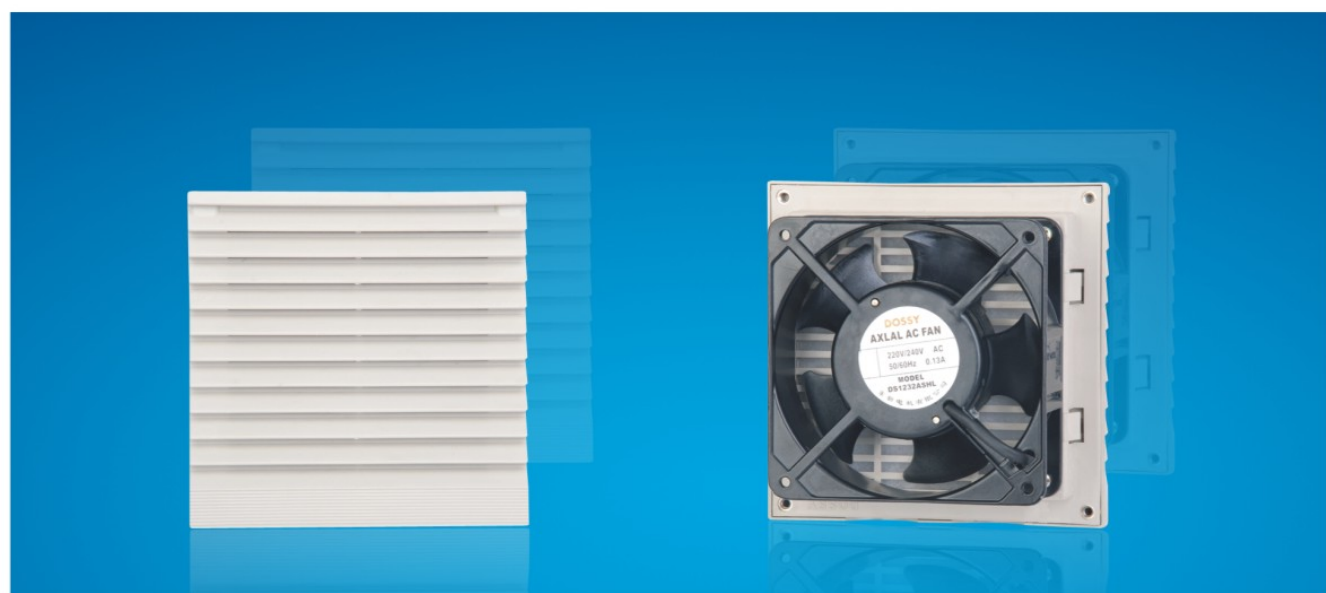



P/N	Model	Outline size	Panel hole size	Fan code	Air volume m <sup>3</sup> /min	Noise (db)
PF205	ZL205	205*205*13.5MM	177*177MM	None	None	None
PF205.1225	ZL205			with 120*120*25mm fan	85	32
PF205.1238	ZL205			with 120*120*38mm fan	138	39
PF205.1551	ZL205			with 150*150*150mm fan	330	50
PF205.1552	ZL205			with 172*150*50mm fan	330	50
PF205.1752	ZI205			with 172*172*50mm fan	330	50

For special color please add the color code to the end of P/N

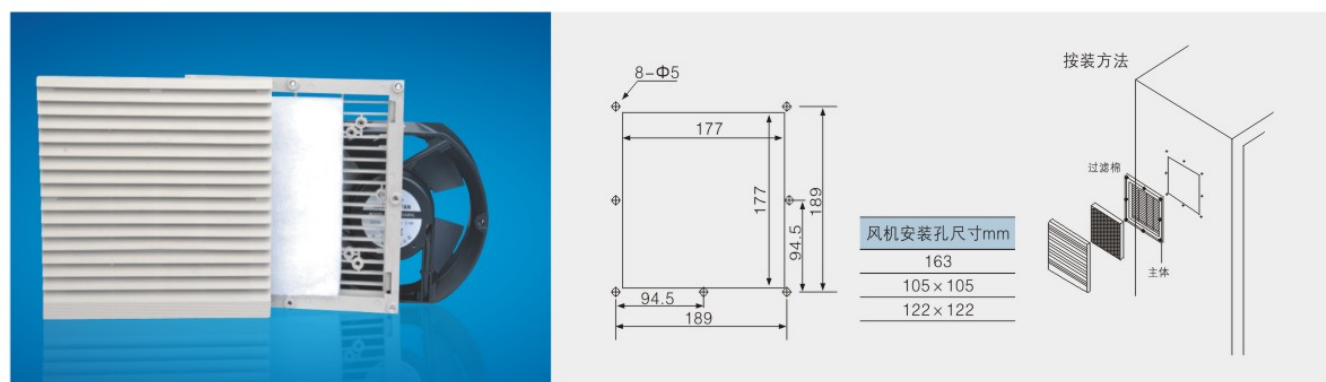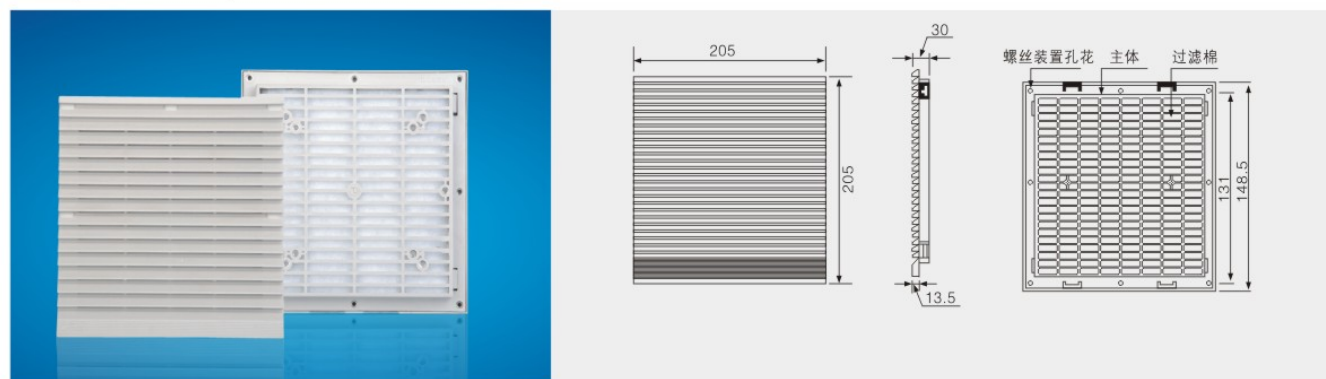

P/N	Model	Outline size	Panel hole size	Fan code	Air volume m <sup>3</sup> /min	Noise (db)
PF805	ZI805	255*255*13.5MM	223*223MM	None	None	None
PF805.1552	ZL805			with 172*150*50mm fan	330	50
PF805.1752	ZL805			with 172*172*50mm fan	330	50
PF805.18060	ZL805			with 180*180*60mm fan	618	60
PF805.20060	ZL805			with 200*200*60mm fan	618	60
PF805.22580	ZI805			with 225*225*80mm fan	1150	69



For special color please add the color code to the end of P/N

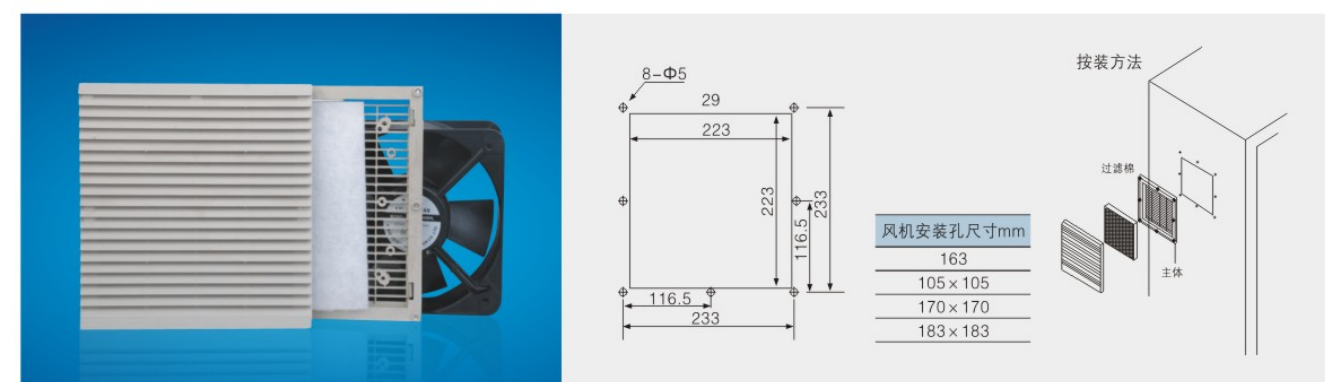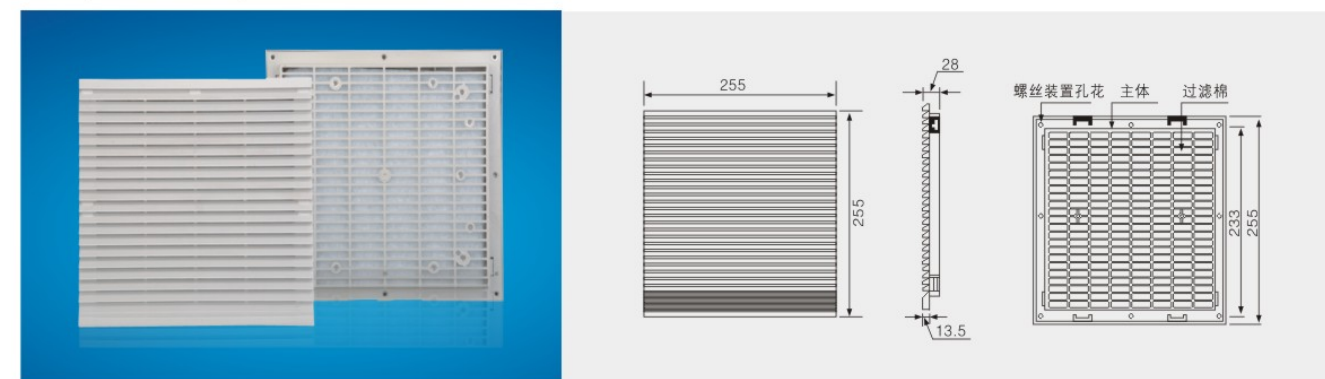




P/N	Model	Outline size	Panel hole size	Fan code	Air volume m <sup>3</sup> /min	Noise (db)
PF256	ZI256	256*256*13.5MM	225*225MM	None	None	None
PF256.1552	ZL256			with 172*150*50mm fan	330	330
PF256.1752	ZL256			with 172*172*50mm fan	330	330
PF805.18060	ZL805			with 180*180*60mm fan	618	60
PF256.20060	ZL256			with 200*200*60mm fan	618	618
PF256.22580	ZI256			with 225*225*80mm fan	1150	1150

For special color please add the color code to the end of P/N

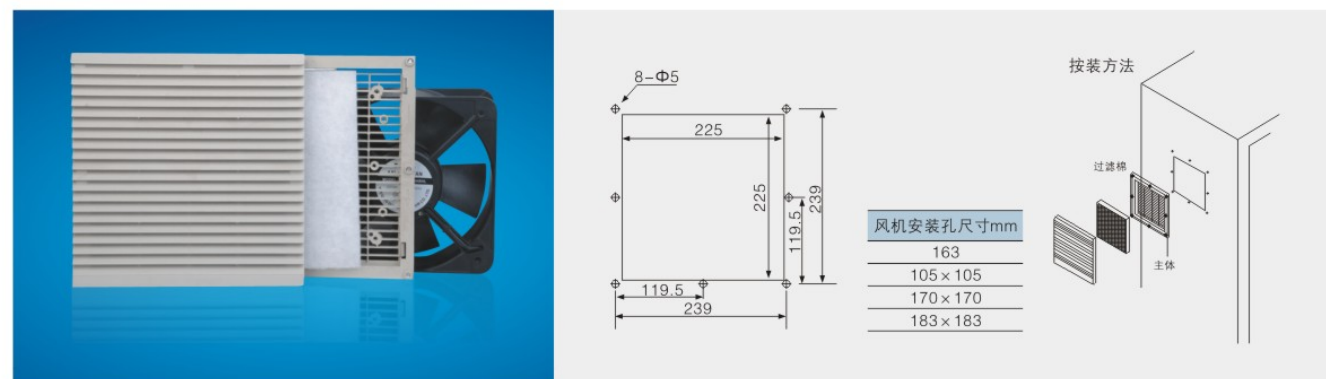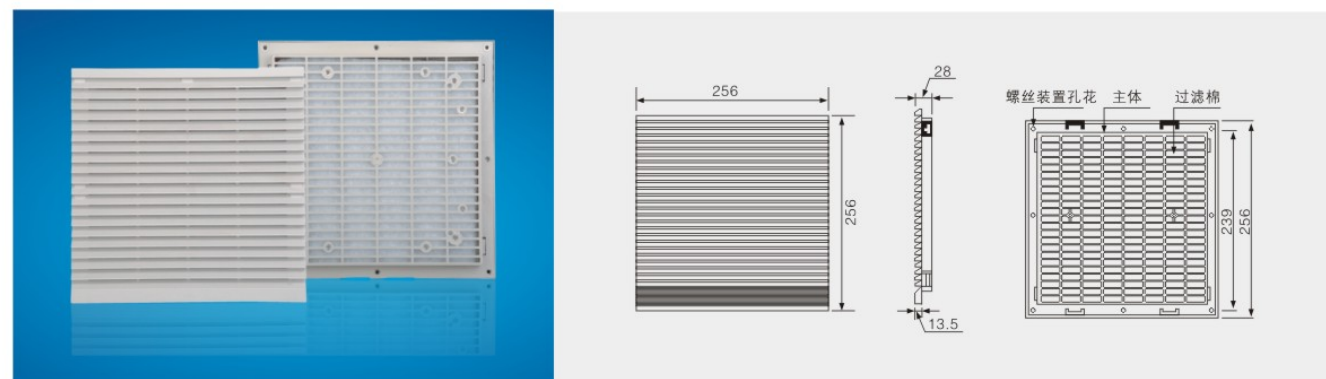

P/N	Model	Outline size	Panel hole size	Fan code	Air volume m <sup>3</sup> /min	Noise (db)
PF806	ZL806	320*320*13.5MM	282*282MM	None	None	None
PF806.22060	ZL806			with 220*220*60mm fan	618	60
PF806.20060	ZL806			with 200*200*60mm fan	618	60
PF806.22580	ZI806			with 225*225*80mm fan	1150	69




For special color please add the color code to the end of P/N

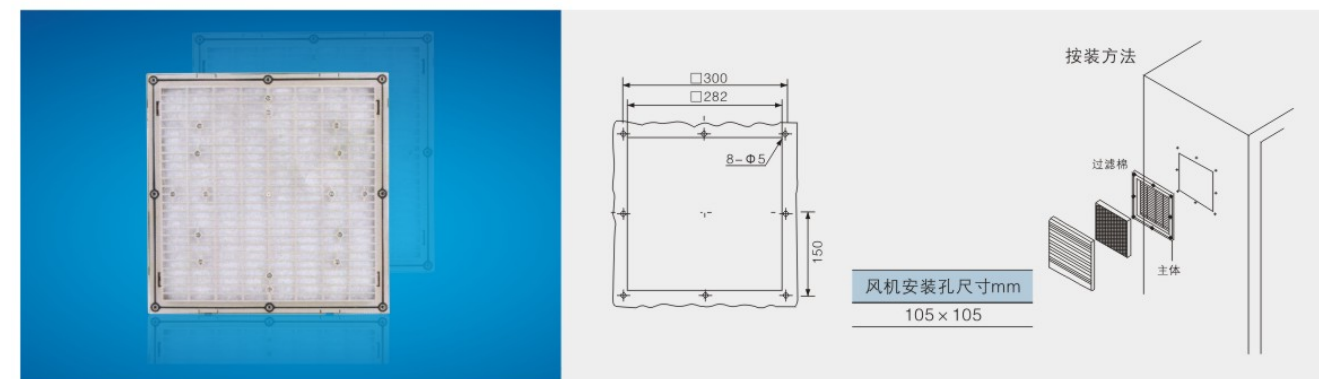



P/N	Model	Outline size	Panel hole size	Fan code	Air volume m <sup>3</sup> /min	Noise (db)
PF320	ZL320	323*323*13.5MM	290*290MM	None	None	None

For special color please add the color code to the end of P/N

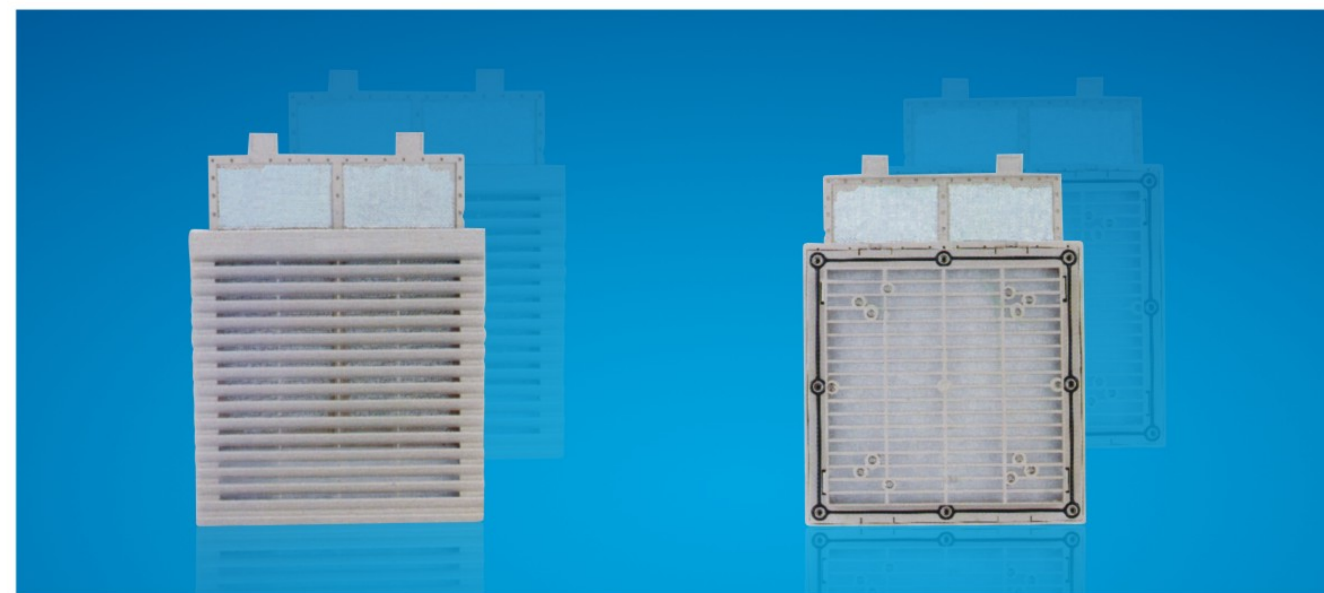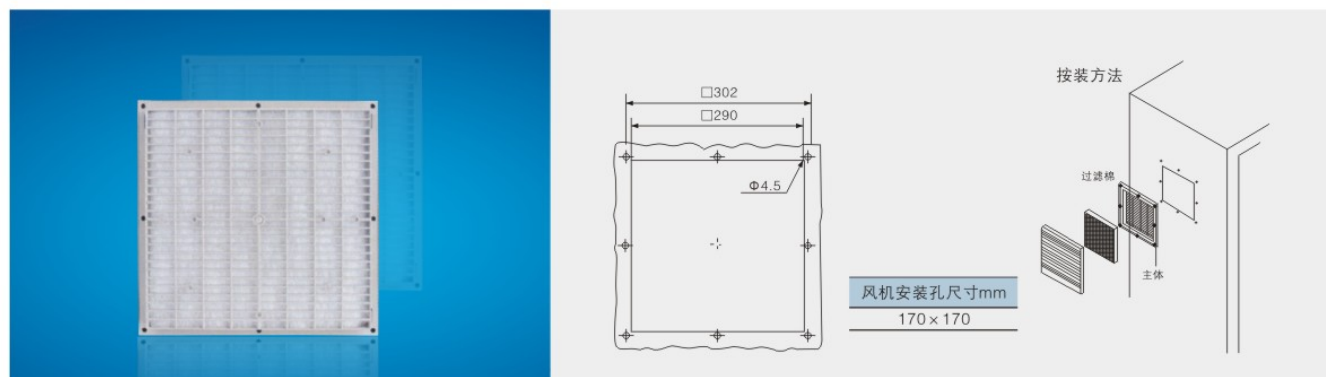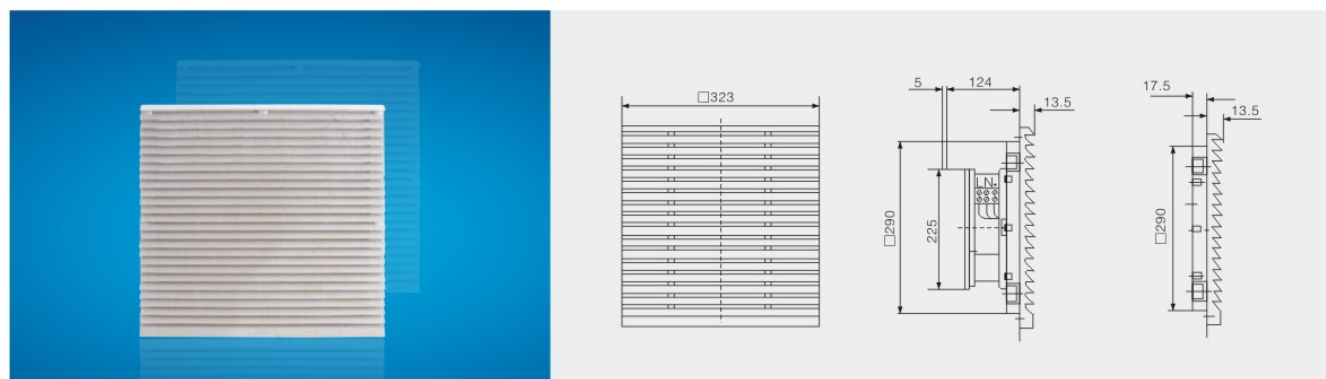

产品型号	外型尺寸(露出部分)	有效风量	最大风速	除尘率	压损范围	使用温度	材料	防火等级	重量	防护等级
PB9804	150mm × 150mm × 13.5mm	25m <sup>3</sup> /min	2.0m/sec	86%	6.7-20 INCH-H <sub>2</sub> O	室内-10°C~+55°C	ABS树脂	94V-0,UL	156g	IP44

