

***EB4030DTSAM-P* MEMS Microphone IC**

Product Description

The ***EB4030DTSAM-P*** microphone IC are integrated with specialized pre-amplification ASIC to provide high sensitivity, high SNR output from a capacitive audio sensor. It's packaged for surface mounting and high temperature reflow assembly. ***EB4030DTSAM-P*** which is able to endure reflow temperature up to 260 °C for 30 seconds can be used in SMT process. It is widely used in automotive and industrial electronics device.

Features

- Top port
- High stability - no risk of membrane aging
- Suitable for automatic pick-and-place handler and SMT process
- Pulse density modulator (PDM) output interface supports two microphones on a single data line
- Miniature dimension 4.00mm x 3.00mm x 1.00mm
- RoHS/Green compliant
- Sensitivity deviation within $\pm 1\text{dB}$
- Package type : LGA 8-pin
- Omnidirectional


Applications

- Automotive
- Industrial

Table of Contents

Product Description	P.1
Features	P.1
Applications	P.1
Table of Contents.....	P.2
Functional Block Diagram	P.3
Pin Definition and Function	P.3
Temperature Range	P.3
Acoustical and Electrical Characteristics.....	P.4
Timing	P.6
Frequency Response	P.7
State	P.8
Reliability Qualifications	P.9
Reflow Profile	P.10
PCB Land Pattern Layout	P.11
Application Circuit	P.12
Handling Instructions	P.13
Dimensions	P.14
Package Information	P.15
Revision History	P.17

Functional Block Diagram

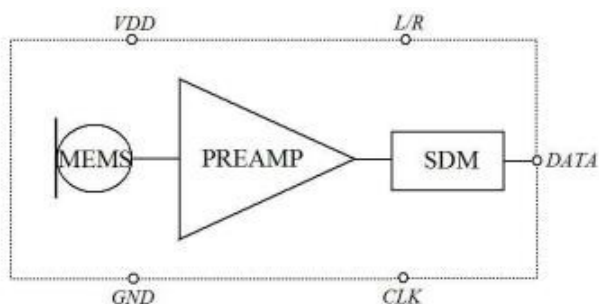

Pin Definition and Function

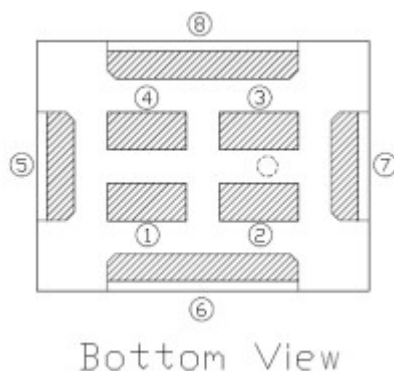


Table 1

Pin #	Symbol	Type	Function
1	DATA	Digital O	Digital Output Signal
2	CLK	Digital I	Clock Input to Microphone
3	L/R	Non-Digital I	Left(Low) / Right(High) Select Pin
4	VDD	Power	Power Supply
5	GND	Power	Ground
6	GND	Power	Ground
7	GND	Power	Ground
8	GND	Power	Ground

Temperature Range

Table 2

Storage Temperature	T _{STG}	-40°C ~ 150°C
Operating Temperature Range	T _A	-40°C ~ 125°C

Acoustical and Electrical Characteristics

Table 3 Typical test conditions are $T_A = 23\text{ }^{\circ}\text{C}$, $V_{DD} = 2.1\text{ V}$ and $R.H. = 50\%$ measured in a pressure chamber test setup. All voltages refer to GND node

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Low Frequency Roll-off	LFRO		50		Hz	-3dB relative to 1KHz
Supply Voltage	Vdd	1.6		3.6	V	
Output Load	C _{Load}			100	pF	
Wake-up Time ⁽¹⁾			100		ms	Fclk $\geq$ 1MHz
Startup Time			100		ms	
Sleep Time			1		ms	Fclk $\leq$ 1KHz
Data Format	1/2 Cycle PDM					
Directivity	Omnidirectional					
Polarity	Increasing density of 1's					Increasing sound pressure

Table 4. Performance Mode Microphone Specifications

Typical test conditions are $T_A = 23\text{ }^{\circ}\text{C}$, $V_{DD} = 1.8\text{V}$, $\text{Clock}=2.4\text{MHz}$ and $R.H. = 50\%$ measured in a pressure chamber test setup. All voltages refer to GND node

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Acoustic						
Sensitivity	S	-27	-26	-25	dBV/Pa	1KHz, 94dBSPL
Signal to Noise Ratio	S/N		64		dBA	A-weighted
Equivalent Noise Level	ENL	30			dBA	A-weighted
Total Harmonic Distortion	THD	<0.2			%	94dBSPL
		1			%	110dBSPL
Acoustic Overload Point	AOP	120			dBSPL	10% THD @1KHz, S = Typ.
Electrical						
Clock Frequency	Fclk	1.0		3.25	MHz	
Current Consumption	Isb		550		μA	Vdd=1.8V
			850		μA	Vdd=3.6V
Power Supply Rejection	PSR+N		-80		dBFS (A)	217Hz, 100mV 1/8 duty cycle peak to peak square wave on Vcc 2.1V, A-weighted
Power Supply Rejection Ratio	PSRR		60		dBV/FS	1KHz, 200 mV peak to peak sine wave on Vcc 2.1V

Table 5. Low-Power Mode Microphone Specifications

Typical test conditions are $T_A = 23\text{ }^{\circ}\text{C}$, $V_{DD} = 1.8\text{V}$, $\text{Clock} = 768\text{KHz}$ and $R.H. = 50\%$ measured in a pressure chamber test setup. All voltages refer to GND node

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Acoustic						
Sensitivity	S	-27	-26	-25	dBV/Pa	1KHz, 94dBSPL
Signal to Noise Ratio	S/N		64		dBA	A-weighted
Equivalent Noise Level	ENL		30		dBA	A-weighted
Total Harmonic Distortion	THD		<0.2		%	94dBSPL
			1		%	120dBSPL
Acoustic Overload Point	AOP		120		dBSPL	10% THD @1KHz, S = Typ.
Electrical						
Clock Frequency	Fclk	350		800	KHz	
Current Consumption	Isb		300		μA	Vdd=1.8V
			400		μA	Vdd=3.6V
Power Supply Rejection	PSR+N		-80		dBFS (A)	217Hz, 100mV 1/8 duty cycle peak to peak square wave on Vcc 2.1V, A-weighted
Power Supply Rejection Ratio	PSRR		60		dBV/FS	1KHz, 200 mV peak to peak sine wave on Vcc 2.1V

Table 6. Sleep Mode Microphone Specifications

Typical test conditions are $T_A = 23\text{ }^{\circ}\text{C}$, $V_{DD} = 1.8\text{V}$, $\text{Clock} = 0\text{Hz}$ and $R.H. = 50\%$ measured in a pressure chamber test setup. All voltages refer to GND node

Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Clock Frequency	Fclk	0		250	KHz	
Current Consumption Sleep Mode	Isleep		10		μA	Clock = VDD or GND

(1). Time from the first clock edge to valid output data


Timing Characteristics

Table 7. Microphone Interface Specifications


Parameters	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Logic Input High	V_{IH}	0.70x VDD		VDD	V	
Logic Input Low	V_{IL}	-0.3		0.30x VDD	V	
Logic Output High	V_{OH}	0.65x VDD		VDD	V	Iout = 1mA
Logic Output Low	V_{OL}	0		0.35x VDD	V	Iout = 1mA
Clock Duty Cycle		40		60	%	
Clock Period for Normal Mode	T_{cyc}	308		1000	ns	
Data Setup Time	T_{dv}			30 ⁽¹⁾	ns	
Data Hold Time	T_{hold}	3 ⁽¹⁾			ns	

(1). Guaranteed by design

Timing Waveforms

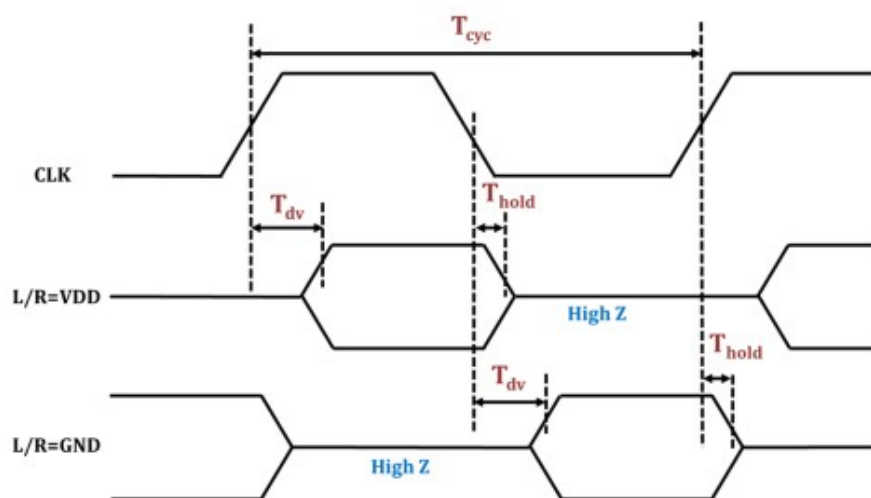


Frequency Response

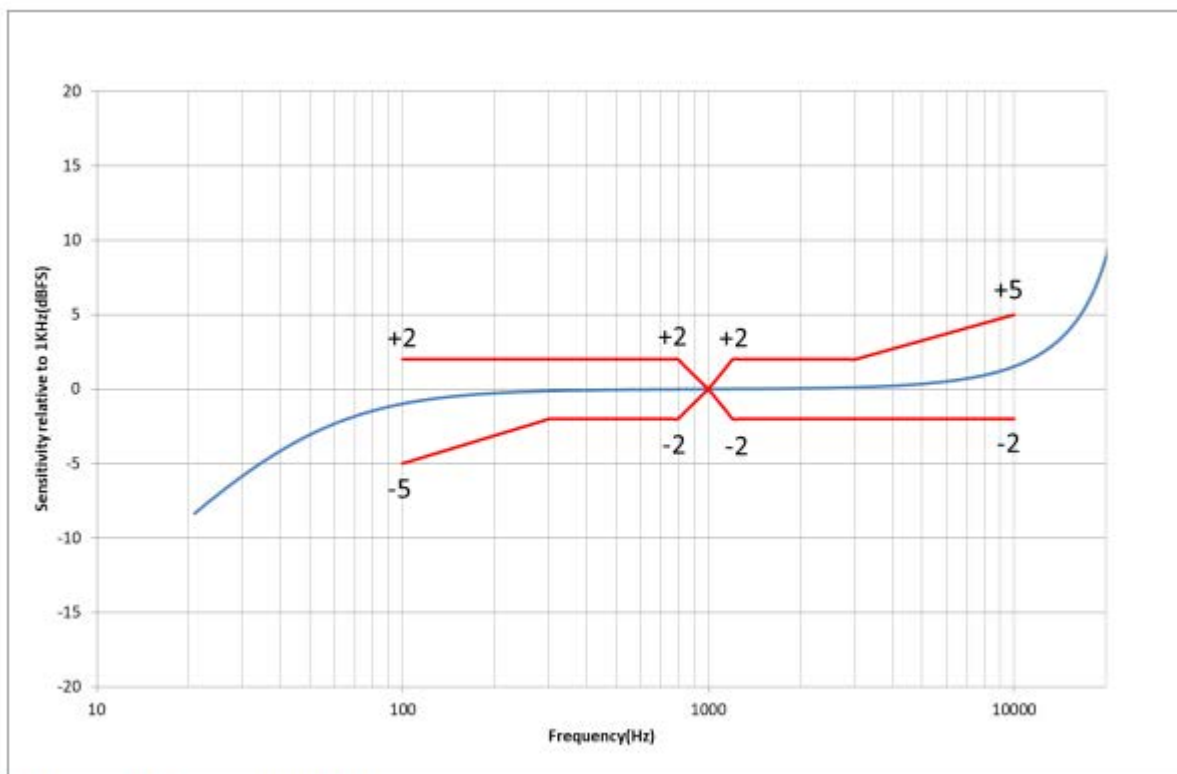

* Measured frequency of 1 KHz

Upper Limit							
Hz	100	800	1000	1200	2000	3000	10000
dB ref. 1KHz	+2	+2	0	+2	+2	+2	+5
Lower Limit							
Hz	100	300	800	1000	1200	3000	10000
dB ref. 1KHz	-5	-2	-2	0	-2	-2	-2

State Diagram

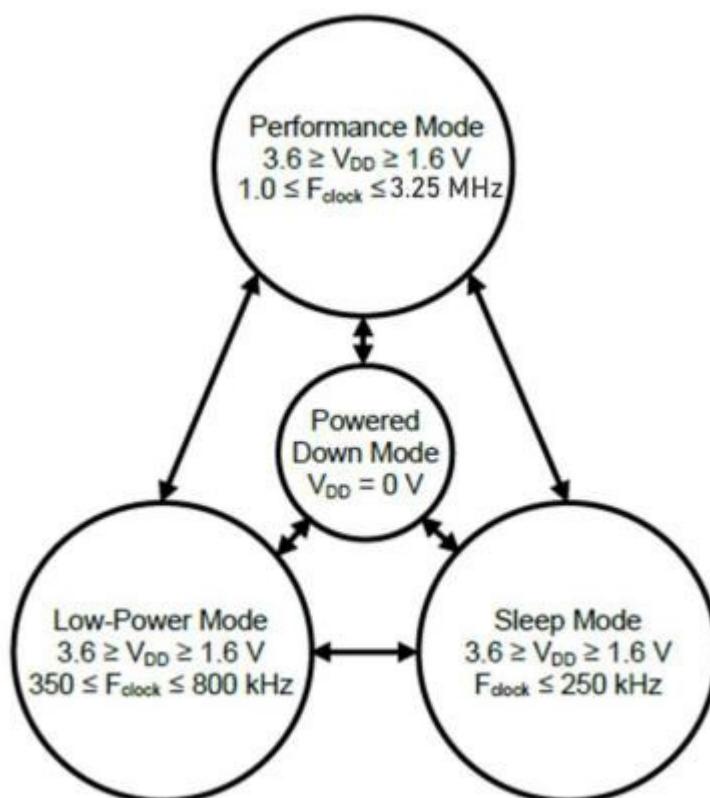

Reliability Qualifications

Table 8

Test Item	Description
High Temperature Storage	Storage at 150°C for 1,000 hours JESD22-A103
Low Temperature Storage	Storage at -40°C for 1,000 hours JESD22-A119
High Temperature Operation Bias	Under Bias at 125°C for 1,000 hours JESD22-A108
Low Temperature Operation Bias	Under Bias at -40°C for 1,000 hours JESD22-A108
Temperature Humidity Bias	Under Bias at 85°C/85%RH for 1,000 hours JESD22-A101
Thermal Shock	Thermal Shock 100 cycles from- 40°C~125°C, 100 cycles JESD22- A104
Reflow	3 reflow cycles with peak 260°C J- STD-020D
Vibration	4 cycles lasting 12 minutes from 20 to 2KHz in X, Y and Z with peak acceleration of 20G JESD22-B103
Shock	3 pulses 10,000G in X,Y and Z JESD22-B104
ESD	HBM:3KV, MM:300V, CDM:500V Air Discharge:15KV, Contact Discharg:8KV JESD22- A114(HBM); JESD22-A115(MM) JESD22-C101(CDM) IEC 61000-4-2(Air Discharge) IEC 61000-4- 2(Contact Discharge)
Tumble test	300 tumbles from a height of 1m onto a steel base.

Notes: Microphones meet all acoustic and electrical specifications before and after reliability testing, except sensitivity which can deviate up to 3dB.

After 3 reflow cycles, the sensitivity of the microphone shall not deviate more than 1 dB from its initial value

Reflow Profile

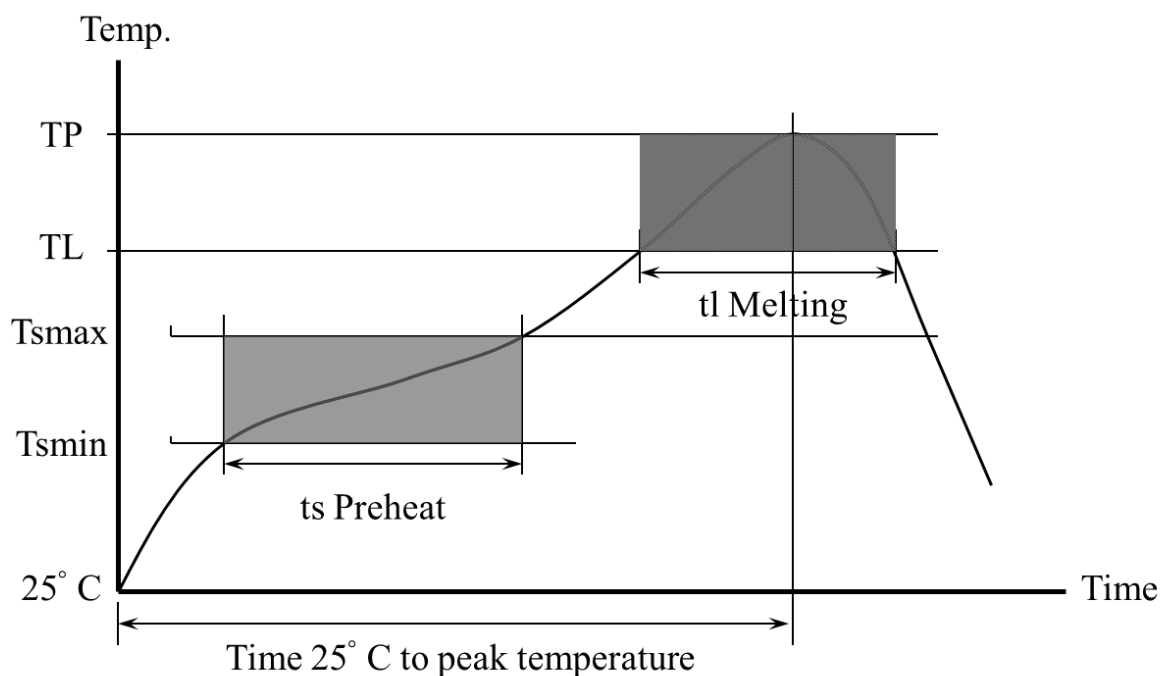


Table 9. Recommended Reflow Profile Limits


Profile Feature	Pb-free
Preheat	
Minimum temperature (T _{smin})	150 °C
Maximum temperature (T _{smax})	200 °C
Time (ts)	60~180 sec
Average Ramp up rate (T _{smax} to T _p)	3 °C/sec
Melting area	
Melting temperature (T _L)	217 °C
Time maintained above melting (tl)	60~150 sec
Peak Temperature (T _P)	260 °C
Time within 5°C of actual peak temperature	20~40 sec
Ramp down rate	6 °C/sec maximum
Time 25°C to peak temperature	8 minute maximum

Notes: Based on IPC/JDEC J-STD-020 Revision C.

All temperatures refer to topside of the package, measured on the package body surface.

PCB Land Pattern Layout

Recommended Land Pattern

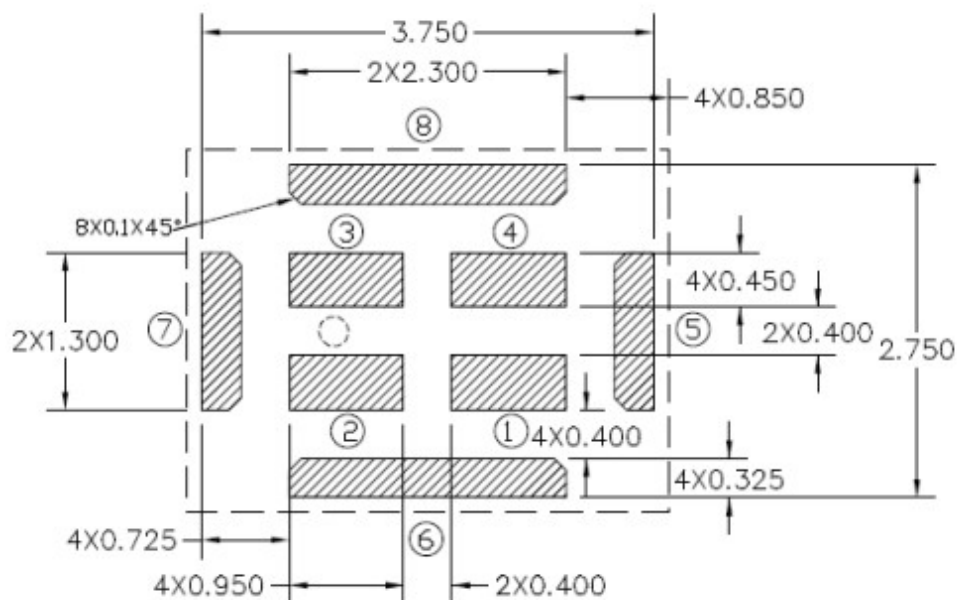

Application Circuit

The L/R pad lets the user to select the DATA signal pattern as explained in Table 7.

The L/R pin must be connected to either VDD or GND.


Table 10. L/R channel selection

L/R	CLK low	CLK high
GND	DATA valid	High impedance
VDD	High impedance	DATA valid

Single microphone application:

0.1 μ F ceramic, and 10 μ F ceramic power supply decoupling capacitors should be placed as near as possible to VDD of the device. **The L/R pin must be connected to VDD or GND.**

Two microphones application:

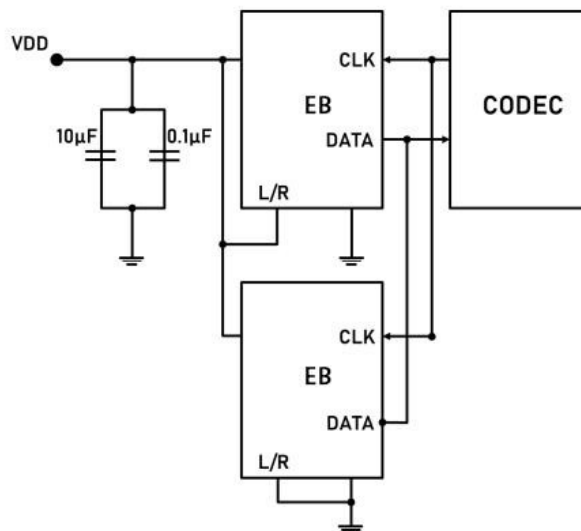

Handling Instructions

The MEMS microphone IC can be handled using standard pick-and-place and chip-shooting equipment. Care should be taken to avoid damage to the MEMS microphone IC structure as follows:

- . Do not apply vacuum nozzle over the acoustic port (AP) of the microphone to avoid damage to the device.
- . Do not blow air directly into acoustic port. If air gun cleaning is required, the minimum distance is 10cm and the maximum air blow pressure is 30psi.
- . Brushing the board with/without solvents may damage the device.
- . Do not use excessive force to place the microphone on the PCB.
- . In case of manual handling, it should be handled with plastic tweezers to avoid damage to the device.
- . Do not open and remove IC from packaging until devices are ready to be mounted.
- . Suggest PCB depaneling be done with depaneling cutter/router, or manually de-panel PCB with care and without any contact of MEMS Microphone IC.

The image displays three orthographic views of a mechanical component with the following dimensions and features:

- Top View:** Shows a rectangular plate with overall dimensions L (length) and W (width). A central circular hole has a diameter of $\phi 0.510$. A feature callout $\phi 0.25 \pm 0.05$ points to the hole. A dimension of 1.220 is shown from the left edge to the center of the hole. Features are labeled with circled numbers 1 through 8.
- Bottom View:** Shows the underside of the plate with a total width of 2.750 . It includes several rectangular features with dimensions: 2×2.300 , 4×0.850 , $8 \times 0.1 \times 45$, 2×1.300 , 4×0.450 , 0.400 , 4×0.400 , 4×0.850 , 4×0.325 , 4×0.725 , 4×0.950 , and 2×0.400 . Features are labeled with circled numbers 1 through 8.
- Side View:** Shows the profile of the plate with a total thickness of H . It consists of three horizontal lines representing the top, middle, and bottom surfaces.


Unit: mm

Dimension tolerance is $\pm 0.15\text{mm}$ unless otherwise specified


Item	Dimension	Tolerance
Length (L)	4.00 mm	±0.10 mm
Width (W)	3.00 mm	±0.10 mm
Height (H)	1.00 mm	±0.10 mm
Acoustic Port	Φ 0.25 mm	±0.05 mm

Package Information


Carrier Tape:

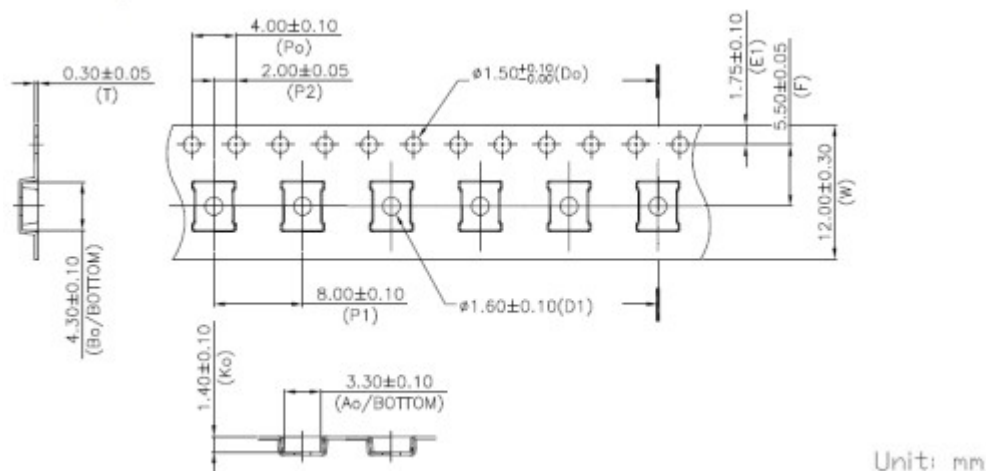

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481 requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. MSL(Moisture sensitivity level) Class1.




Laser Marking:



Laser marking on the top side

XYMD	Internal Tracking Code(X:Subject to change without notice) Date Code(Y:Year; M:Month; D:Day)
AAAA	Lot Tracking Code

13" Tape Reel :

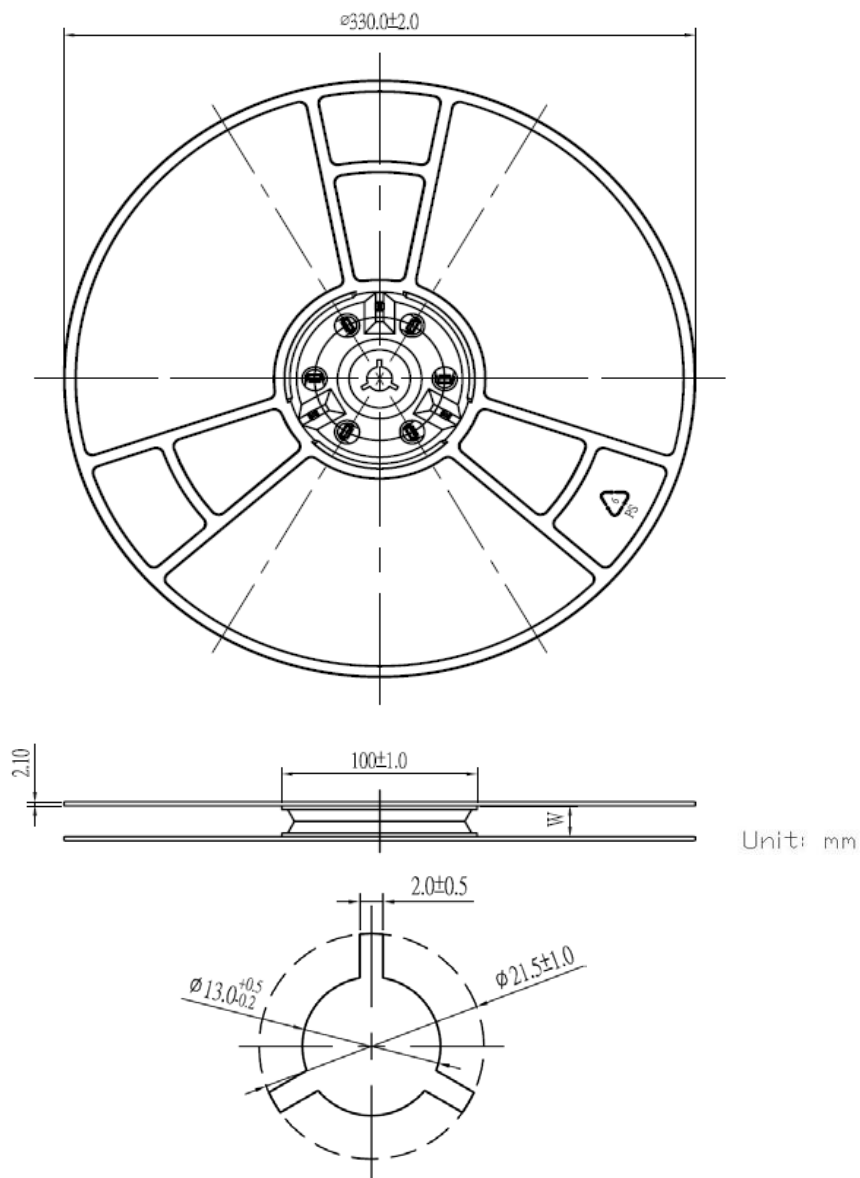

Model Number	Reel Diameter	Quantity Per Reel
EB4030DTSAM-P	13"	5,000

Revision History

Revision	Date	Description
1.0	2021/08/20	Formal release
1.1	2021/09/16	Modify “Reliability Qualifications”