


UL 1533 Single Conductor Shielded Cable 单芯屏蔽线

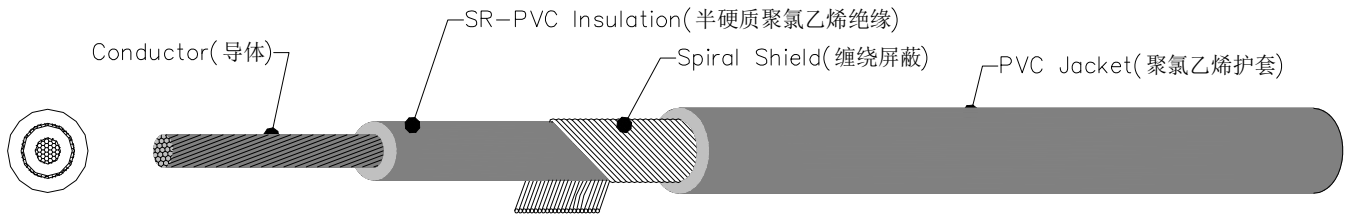

有 AWM 1533 AWG VW-1 80°C 30V E234411 BETTER c有 AWM I A 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: Not specified
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No. 210.2
- Tinned or bare, stranded or solid copper conductor, 30-16AWG
- Lead free SR-PVC insulation
- Tinned or bare copper wire, spiral shield
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For use in recording studios, sound systems and electronic circuits

说明

- 额定温度: 80°C
额定电压: 无规定
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用30-16AWG单根或镀锡
铜线
- 半硬质无铅聚氯乙烯绝缘
- 镀锡铜或裸软铜线缠绕屏蔽
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于录音、录影设备、声响系统及电子电路

Conductor 导体			Insulation 绝缘		Spiral Shield 缠	Jacket 护套		Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia	No. /mm	Nom. thick	Nom. Dia.	最大导体电阻
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm	线数/线径	厚度 mm	外径 mm	Ω/km
30	7/0.10	0.30	0.23	0.80	24/0.12	0.3	1.70±0.10	354.24
28	7/0.127	0.39	0.23	0.90	27/0.12	0.3	1.80±0.10	223.75
26	7/0.16	0.49	0.23	1.00	29/0.12	0.3	1.90±0.10	139.73
24	11/0.16	0.61	0.23	1.10	32/0.12	0.3	2.05±0.10	88.89
22	17/0.16	0.76	0.23	1.25	35/0.12	0.3	2.15±0.10	57.52
20	26/0.16	0.94	0.23	1.40	40/0.12	0.3	2.30±0.10	37.61
18	41/0.16	1.18	0.23	1.70	48/0.12	0.3	2.60±0.10	23.85
16	26/0.254	1.49	0.23	2.00	56/0.12	0.3	2.90±0.10	15.06