


TELEPHONE CORD 电话线

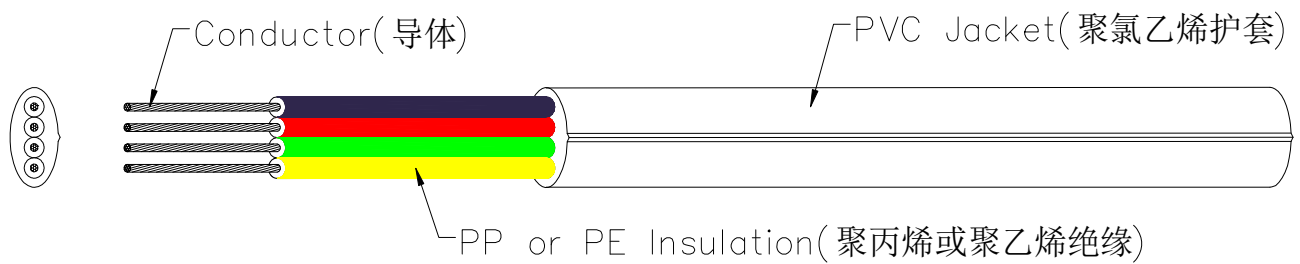

BETTER E146591 DUXR CONTROL NO. 33Y2

PRODUCT DESCRIPTION

- Rated temperature: 60°C
Rated voltage: 150V
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No. 233
- stranded or solid, tinned or bare copper or tinsel wire
- Two to eight conductors
- Colour-coded PP or PE insulation
- Cores are laid parallel into a flat cable formation
- Colour-coded PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

Telephone handset cord or line cord

说明

- 额定温度: 60°C
额定电压: 150V
- 标准: UL758, UL1581及 CSA C22.2 No. 233
- 导体使用绞合或单根裸铜、镀锡或铜箔丝
- 两芯至8芯
- 聚丙烯或聚乙烯绝缘
- 芯线作平行放置令护套押出后成扁平形状
- 聚氯乙烯护套
- 通过UL VW-1及CSA FT1 垂直耐燃测试

应用

电话听筒曲线或接线

Cores	Conductor 导体		insulation 绝缘		Jacket 护套	Maximum Resistance at20℃ 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia		
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	Nom. Dia 外径 mm	
2	28	7/0.127	0.30	0.98	2.3X3.8	223
2	28	7/0.127	0.30	0.98	2.3X4.2	223
2	28	7/0.127	0.30	0.98	2.4X4.5	223
2	28	7/0.127	0.30	0.98	2.4X4.8	223
2	32	TINSEL	0.21	0.98	2.3X3.8	1000
2	32	TINSEL	0.21	0.98	2.3X4.2	1000
2	32	TINSEL	0.21	0.98	2.4X4.5	1000
2	32	TINSEL	0.21	0.98	2.4X4.8	1000
4	28	7/0.127	0.30	0.98	2.4X4.5	223
4	28	7/0.127	0.30	0.98	2.4X4.8	223
4	32	TINSEL	0.21	0.98	2.4X4.5	1000
4	32	TINSEL	0.21	0.98	2.4X4.8	1000
6	28	7/0.127	0.30	0.98	2.4X5.9	223
6	32	TINSEL	0.21	0.98	2.4X5.9	1000
8	28	7/0.127	0.30	0.98	2.4X9.0	223
8	32	TINSEL	0.21	0.98	2.4X9.0	1000