


UL 1195 Hook-up Wire 连接线

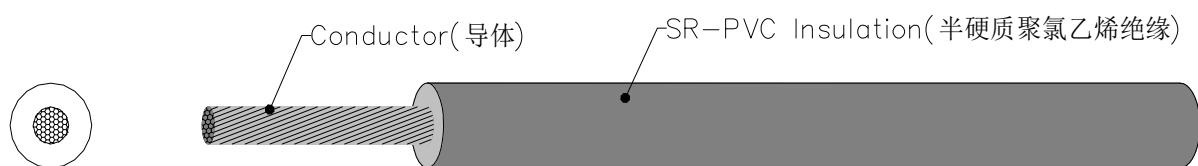

有 AWM 1195 AWG VW-1 80℃ 300V E234411 BETTER c有 AWM I A 80℃ 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80℃
Rated voltage: 300V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-14AWG
- Colour-coded lead free SR-PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring of electronic and electrical equipment

说明

- 额定温度：80℃
额定电压：300V
- 标准：UL758，UL1581及
CSA C22.2 No. 210.2
- 导体使用30-14AWG单根或绞合裸铜或镀锡铜线
- 半硬质无铅聚氯乙烯绝缘
- 绝缘厚度均匀, 方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子、电器设备内部连线、电缆芯线

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20℃
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体电阻 Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
30	7/0.10	0.30	0.38	1.15±0.05	610	354.24
28	7/0.127	0.39	0.38	1.25±0.05	610	223.75
26	7/0.16	0.49	0.38	1.35±0.05	610	139.73
24	11/0.16	0.61	0.38	1.50±0.05	610	88.89
22	17/0.16	0.76	0.38	1.60±0.05	610	57.52
20	26/0.16	0.94	0.38	1.80±0.05	610	37.61
18	41/0.16	1.18	0.38	2.00±0.05	610	23.85
16	26/0.254	1.49	0.38	2.40±0.05	610	15.06
14	41/0.254	1.87	0.38	2.70±0.05	610	9.46