


UL 1051 HooK-up Wire 连接线

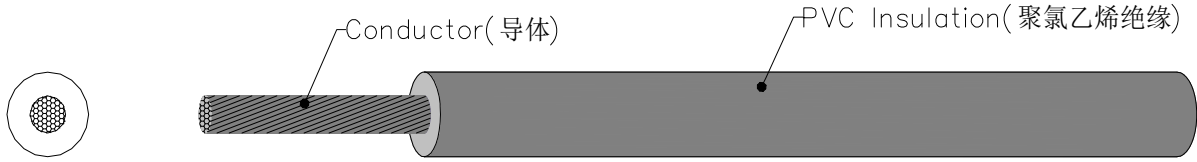

UL AWM 1051 AWG VW-1 90°C 300V E234411 BETTER C UL AWM I A 90°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 90°C
Rated voltage: 300V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-16 AWG
- Colour-coded lead free PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring of electronic and electrical equipment

说明

- 额定温度：90°C
额定电压：300V
- 标准：UL758，UL1581及 CSA C22.2 No. 210.2
- 导体使用30-16AWG，单根或绞合裸铜或镀锡铜线
- 无铅聚氯乙烯绝缘
- 绝缘厚度均匀，方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用於电子、电器设备内部连线

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体电阻 Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
30	7/0.10	0.30	1.143	2.7±0.10	610	354.24
28	7/0.127	0.39	1.143	2.8±0.10	610	223.75
26	7/0.16	0.49	1.143	2.9±0.10	610	139.73
24	11/0.16	0.61	1.143	3.0±0.10	610	88.89
22	17/0.16	0.76	1.143	3.2±0.10	610	57.52
20	26/0.16	0.94	1.143	3.4±0.10	610	37.61
18	41/0.16	1.18	1.143	3.6±0.10	610	23.85