


UL 1569 Hook-up Wire 连接线

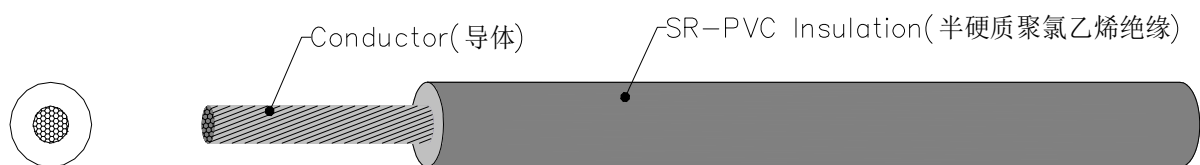

有 AWM 1569 AWG VW-1 80℃ 300V E234411 BETTER c有 AWM I A 80℃ 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80℃ or 90℃ or 105℃
Rated voltage: 300V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-2AWG
- Colour-coded PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring of electronic and electrical equipment, protection is required where mechanical damage is possible

说明

- 额定温度：80℃或90℃或105℃
额定电压：300V
- 标准：UL758，UL1581及
CSA C22.2 No. 210.2
- 导体使用30-2AWG单根或绞合裸铜
或镀锡铜线
- 聚氯乙烯绝缘
- 绝缘厚度均匀，方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子、电器设备内部连线，
如机械动作会令其磨损，
需做适当的保护

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20℃
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体电阻 Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
30	7/0.10	0.31	0.406	1.15±0.05	610	354.24
28	7/0.127	0.39	0.406	1.25±0.05	610	223.75
26	7/0.16	0.49	0.406	1.35±0.05	610	139.73
24	11/0.16	0.61	0.406	1.50±0.05	610	88.89
22	17/0.16	0.76	0.406	1.60±0.05	610	57.52
20	26/0.16	0.94	0.406	1.80±0.05	610	37.61
18	41/0.16	1.18	0.406	2.10±0.05	610	23.85
16	26/0.254	1.49	0.406	2.40±0.05	610	15.06
14	41/0.254	1.87	0.406	2.65±0.05	610	9.46