


UL 20856 INSULATED 电子线

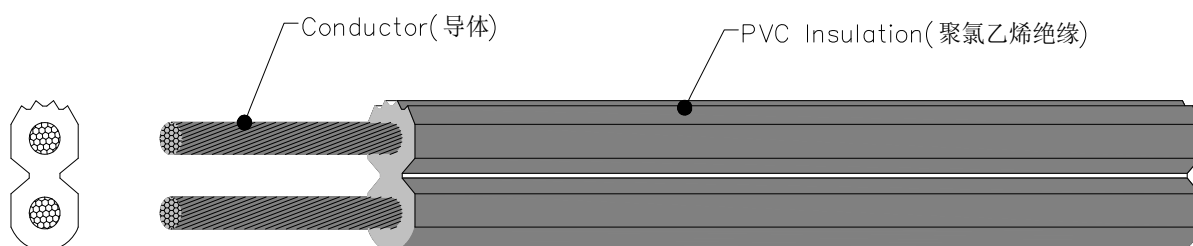

AWM 20856 VW-1 60°C 300V E234411 BETTER C AWM I A 60°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 60°C, 105°C
Rated voltage: 300V
- Reference standard: UL758
- Tinned or bare, stranded copper conductor, 15-14AWG
- Colour-coded lead free PVC insulation
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For use in household clocks, fans, radio and similar appliances and other tools

说明

- 额定温度: 60°C, 105°C
额定电压: 300V
- 标准: UL758
- 导体使用15-14AWG 裸铜或镀锡铜线
- 无铅聚氯乙烯绝缘
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于家用时钟、电扇、收音机及各类电器和其它工具

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体 电阻 Ω /km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
15	33/0.254	1.68	1.14	4.15±0.1X8.2±0.1	305	10.4
14	41/0.254	1.87	1.14	4.31±0.1X8.4±0.1	305	9.46