


UL 2547 Shielded Computer 屏蔽电脑线

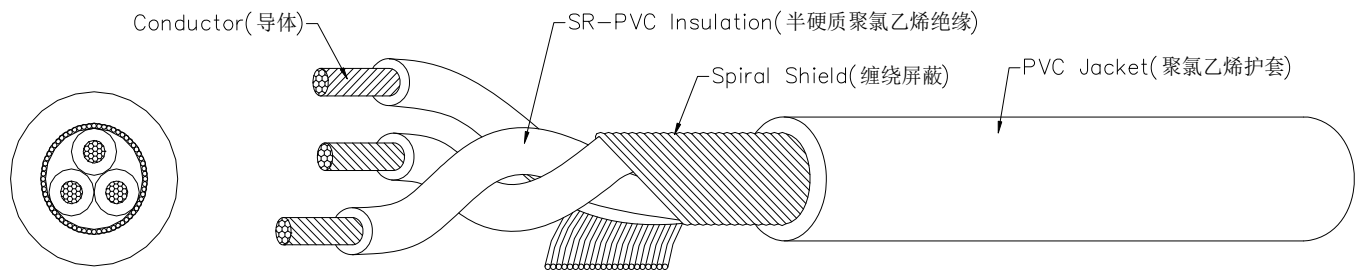

AWM 2547 VW-1 80°C 300V E234411 BETTER C AWM I A 80°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: Not specified
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No. 210.2
- Stranded, tinned or bare copper conductor
30-16AWG minimum
- Colour-coded SR-PVC insulation
- Two to three cores
- Tinned or copper wire spiral shield
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For use in recording studios, sound systems and electronic circuits

说明

- 额定温度: 80°C
额定电压: 无规定
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用AWG30-16以上绞合裸铜或镀锡铜线
- 半硬质聚氯乙烯绝缘
- 二至三芯线
- 裸铜或镀锡铜线缠绕屏蔽
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于录音机、音响系统、电子系统

Cores	Conductor 导体		insulation 绝缘		Braid shield 斜包屏蔽	Jacket 护套		Maximum Resistance at 20°C 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia		Nom. thick	Nom. Dia.	
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	No. /No. / mm	厚度 mm	外径 mm	
2	30	7/0.10	0.23	0.80	44/0.1	0.30	2.5±0.1	354
2	28	7/0.127	0.23	0.90	46/0.1	0.30	2.7±0.1	223
2	26	7/0.16	0.23	1.00	54/0.1	0.30	2.9±0.1	139
2	24	11/0.16	0.23	1.10	62/0.1	0.30	3.1±0.1	88.9
2	22	17/0.16	0.23	1.25	60/0.12	0.30	3.4±0.1	57.5
2	20	26/0.16	0.23	1.50	72/0.12	0.30	3.9±0.1	34.6
2	18	41/0.16	0.23	1.70	82/0.12	0.30	4.4±0.1	23.3
2	16	26/0.254	0.23	2.00	98/0.12	0.30	5.0±0.15	15.1
3	30	7/0.10	0.23	0.80	49/0.1	0.30	2.7±0.1	354
3	28	7/0.127	0.23	0.90	53/0.1	0.30	2.8±0.1	223
3	26	7/0.16	0.23	1.00	54/0.1	0.30	3.0±0.1	139
3	24	11/0.16	0.23	1.10	69/0.1	0.30	3.2±0.1	88.9
3	22	17/0.16	0.23	1.25	72/0.12	0.30	3.6±0.1	57.5
3	20	26/0.16	0.23	1.50	82/0.12	0.30	4.1±0.1	34.6
3	28	41/0.16	0.23	1.70	96/0.12	0.3	4.6±0.15	23.3
3	16	26/0.254	0.23	2.00	114/0.12	0.3	5.3±0.15	15.1