


UL 2468 Flat Ribbon wire 排线

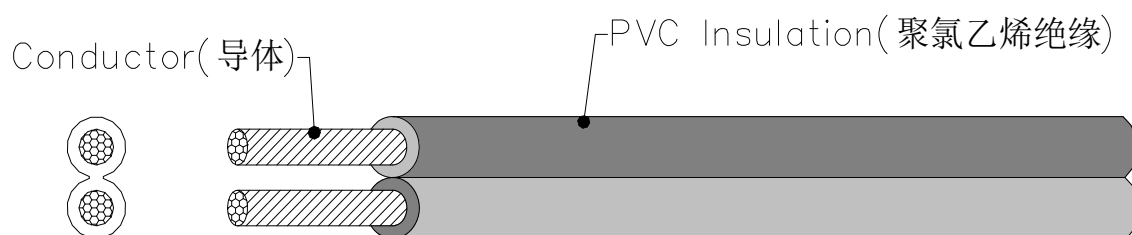

AWM 2468 VW-1 80°C 300V E234411 AWG*2C BETTER C AWM I A E234411 80°C 300V AWG*2C FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 300V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-16AWG minimum
- Colour coded lead free PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring of appliances and computers

说明

- 额定温度: 80°C
额定电压: 300V
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用30-16AWG 单根或绞合裸铜
或镀锡铜线
- 无铅聚氯乙烯绝缘
- 绝缘厚度均匀, 方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子、电器设备内部连线

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体电阻 Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
28	7/0.127	0.39	0.38	1.3X2.6	610	223
26	7/0.16	0.49	0.38	1.4X2.8	610	139
24	11/0.16	0.61	0.38	1.5X3.0	610	88.9
22	17/0.16	0.76	0.38	1.65X3.34	610	57.5
20	26/0.16	0.94	0.38	1.85X3.6	610	37.61
18	41/0.16	1.18	0.38	2.1X4.2	610	23.85