


UL 1208 Hook-up Wire 连接线

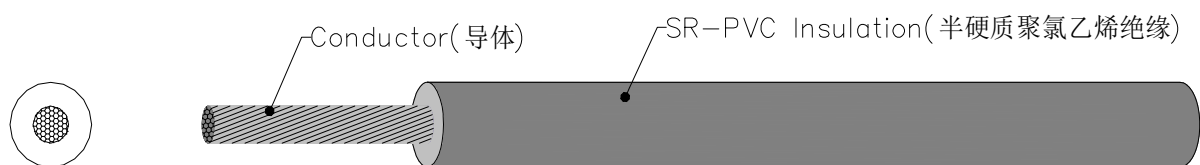

有 AWM 1208 AWG VW-1 80°C 300V E234411 BETTER c有 AWM I A 80°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 300V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-16AWG
- Colour-coded lead free SR-PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring of electronic and electrical equipment, protection is required where mechanical damage is possible

说明

- 额定温度: 80°C
额定电压: 300V
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用30-16AWG单根或绞合裸铜或镀锡铜线
- 半硬质无铅聚氯乙烯绝缘
- 绝缘厚度均匀, 方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子、电器设备内部连线, 如机械动作会令其磨损, 需做适当的保护

Conductor 导体			Insulation 绝缘		Standard Put-Up	Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	标准长度 M/Coil	最大导体电阻 Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm		
30	7/0.10	0.30	0.33	1.05±0.05	610	354.24
28	7/0.127	0.39	0.33	1.15±0.05	610	223.75
26	7/0.16	0.49	0.33	1.25±0.05	610	139.73
24	11/0.16	0.61	0.33	1.40±0.05	610	88.89
22	17/0.16	0.76	0.33	1.50±0.05	610	57.52
20	26/0.16	0.94	0.33	1.70±0.05	610	37.61
18	41/0.16	1.18	0.33	2.0±0.05	610	23.85
16	26/0.254	1.49	0.33	2.5±0.05	610	15.06
14	41/0.254	1.87	0.33	2.65±0.05	610	9.46