


UL 20288 电源线

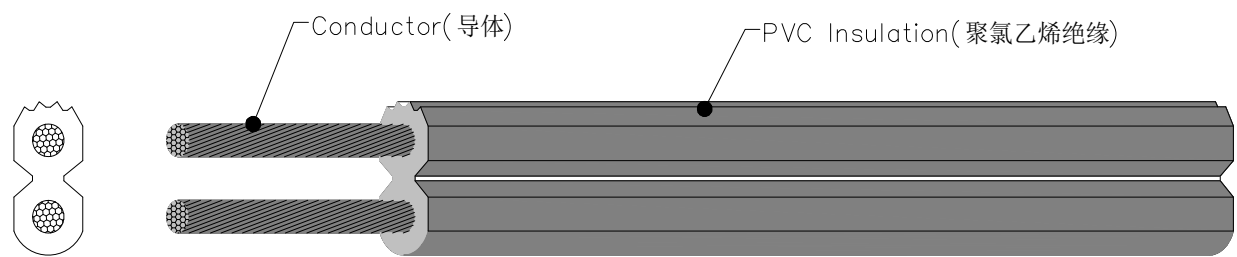

AWM 20288 VW-1 80°C 300V E234411 BETTER C AWM I A 80°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature:60°C,75°C ,80°C,90°C,105°C
Rated voltage:300V
- Reference standard:UL758, UL1581 & CSA C22.2 No.49
- Stranded, bare or tinned copper conductor
- colour-coded lead free PVC insulation & jacket
- Passes UL VW-1& CSA FT1 vertical flame test

APPLICATION

For internal wiring

说明

- 额定温度： 60℃ , 75℃ , 80℃, 90℃, 105℃
额定电压： 300V
- 标准： UL758, UL1581及 CSA C22.2 No.49
- 导体使用绞合裸铜或镀锡铜线 18-12AWG
- 无铅聚氯乙烯绝缘及外套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用於电子设备内部连线

Cores	Conductor 导体			Insulation 绝缘		Jacket Thickness	Overall Diameter	Rating AMP (A)
	AWG	NO. /mm	Dia	Nom. Thick.	Dia.			
芯线数	线规	线数/线径	外径 mm	绝缘厚度 mm	芯线直径 mm	被覆厚度 mm	完成外径 mm	额定电流
2	18	41/0.16	1.18	——	——	1.02	3.25X6.5	10
2	16	26/0.254	1.50	——	——	1.02	3.55X7.1	13