


UL 1108 Hook-up Wire 连接线

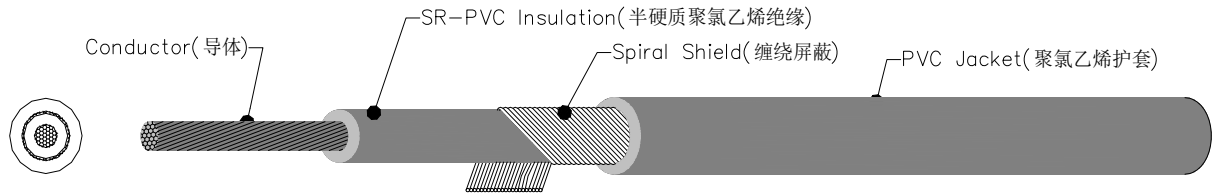

AWM 1108 AWG VW-1 80°C 300V E234411 BETTER C AWM I A 80°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: Not specified
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-14AWG
- Lead free SR-PVC insulation
- Tinned or bare copper wire, spiral shield
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For use in recording studios, sound systems and electronic circuits

说明

- 额定温度：80°C
额定电压：300V
- 标准：UL758，UL1581及 CSA C22.2 No. 210.2
- 导体使用30-14AWG单根或镀锡铜线
- 半硬质无铅聚氯乙烯绝缘
- 镀锡铜或裸软铜线缠绕屏蔽
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于录音、录影设备、声响系统及电子电路

Conductor 导体			Insulation 绝缘		Spiral Shield 缠绕屏蔽	Jacket 护套		Maximum Resistance at 20°C
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia.	No. /mm	Nom. thick	Nom. Dia.	最大导体电阻
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm	线数/线径	厚度 mm	外径 mm	Ω/km
30	7/0.10	0.30	0.406	1.2±0.10	No. /0.1	0.406	3.15±0.10	354.24
28	7/0.127	0.39	0.406	1.3±0.10		0.406	3.25±0.10	223.75
26	7/0.16	0.49	0.406	1.4±0.10		0.406	3.35±0.10	139.73
24	11/0.16	0.61	0.406	1.5±0.10		0.406	3.45±0.10	88.89
22	17/0.16	0.76	0.406	1.65±0.10	No. /0.12	0.406	3.6±0.10	57.52
20	26/0.16	0.94	0.406	1.85±0.10		0.406	3.8±0.10	37.61
18	41/0.16	1.18	0.406	2.1±0.10		0.406	4.0±0.10	23.85
16	26/0.254	1.49	0.406	2.4±0.10		0.406	4.35±0.10	15.06
14	41/0.254	1.87	0.406	2.8±0.10		0.406	4.75±0.10	9.46