


UL 2835 Computer Cable 多芯电脑线

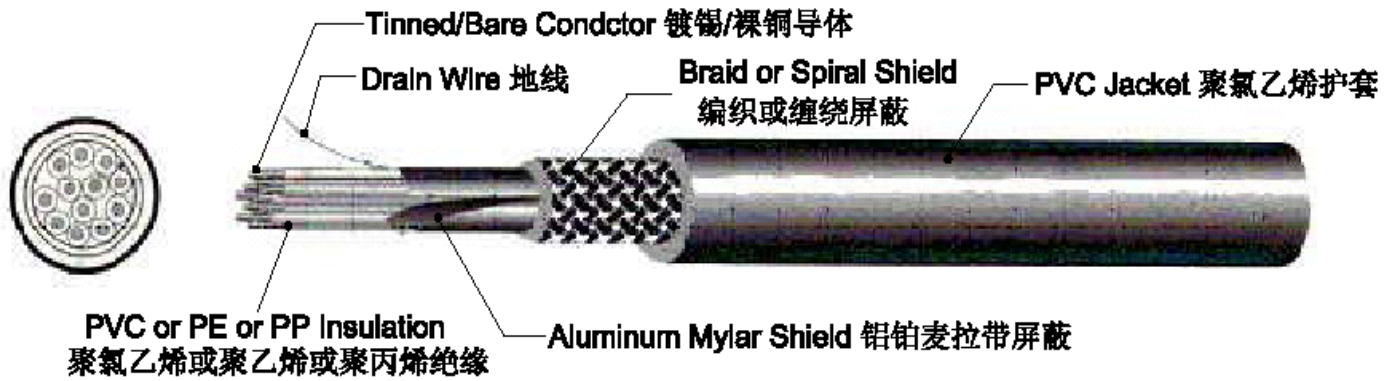

AWM 2835 VW-1 60°C 30V E234411 BETTER C AWM I A 60°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 60°C
Rated voltage: 30V
- Reference standard: UL Subject 758, UL1581 & CSA C22.2 No.210.2
- Stranded, tinned or bare copper, tinsel conductor
- colour-coded lead free PVC or PE or PP insulation
- Tinned or bare copper drain wire
- Tinned or bare copper wire braid shield available
- Lead free PVC jacket
- Non-migration jacket available
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring in class 2 circuits of electronic equipment or TV game machine data transmission

说明

- 额定温度: 60°C
额定电压: 30V
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用绞合裸铜或镀锡铜线或箔丝
- 无铅聚氯乙烯或聚乙烯或聚丙烯绝缘
- 镀锡或裸铜线绞合地线
- 可加上裸铜或镀锡铜线编织屏蔽
- 无铅聚氯乙烯护套
- 可采用非移行性护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于2级电路电子设备内部连线或电视游戏机连接线

Cores	Conductor 导体		insulation 绝缘		Drain wire	Overall Shield 外屏蔽		Jacket 护套		Maximum Resistance at 20°C 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia	地线	Material	spirl/缠绕 No:mm Braid编织 No. /mm	Nom. thick 厚度 mm	Nom. Dia 外径 mm	
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	No. /mm	材料 mm				
4	28	7/0.127	0.22	0.82	-	AL	57/0.10	1.00	4.3	223
4	22	17/0.16	0.22	1.20	17/0.16	AL	-	0.45	4.0	57.5
5	28	7/0.127	0.2	0.80	-	PAPER	16/6/0.12	0.88	4.8	220
6	28	7/0.127	0.22	0.82	-	AL	79/0.10	0.68	4.3	223
7	28	7/0.127	0.26	0.90	7/0.16	-	75/0.12	0.90	5.0	223
8	28	7/0.127	0.23	0.86	-	PAPER	24/5/0.10	0.74	4.8	220
9	28	7/0.127	0.22	0.82	-	PAPER	81/0.12	0.74	4.9	223
10	28	7/0.127	0.26	0.90	7/0.16	AL	-	0.57	5.0	223