


UL 2725 conductor Cable 多芯电缆

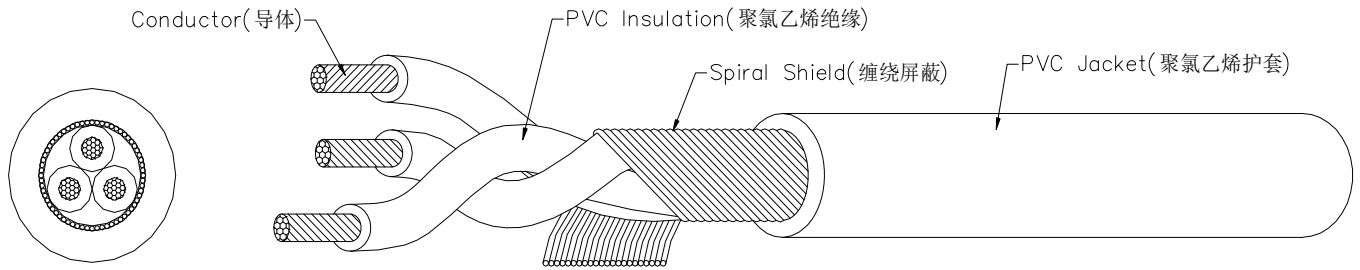

AWM 2725 VW-1 80°C 30V E234411 BETTER C AWM I A 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature:60°C or 80°C
Rated voltage:30V
- Reference standard:UL Subject 758 & UL1581
- Stranded, tinned or bare copper
- Lead free PVC jacket
- Passes UL VW-1 vertical flame test

APPLLCATION

For internal external wiring of class 2 systems
equipmeent and electronic equipment

说明

- 额定温度：60°C or 80°C
额定电压：30V
- 标准：UL758, UL1581
- 导体使用绞合裸铜或镀锡软铜线
- 无铅聚氯乙烯护套
- 通过UL VW-1垂直耐燃测试

应用

用於2类系统及视听电子设备内部
或外部连线

Cores	Conductor 导体		insulation 绝缘		Drain wire	Overall Shield 外屏蔽		Jacket 护套		Maximum Resistance at 20°C 最大导体电 阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia	地线	Materia	spirl/缠绕 No:mm Braid编织 No. /mm	Nom. thick 厚度 mm	Nom. Dia 外径 mm	
芯线数	线规	线数/线径	绝缘厚 度 mm	外径 mm	No. /mm	材料 mm				
2	30	7/0.1	0.25	0.80	—	—	45/0.1	0.50	2.7±0.1	354
2	28	19/0.08	0.15	0.70	—	—	—	0.40	2.2±0.1	220
4	30	7/0.1	0.25	0.80	—	—	59/0.1	0.39	2.9±0.1	354
4	26	7/0.16	0.26	1.00	—	AL	16/5/0.12	0.87	5.0±0.15	139
8	30	7/0.1	0.13	0.56	—	AL	58/0.1	0.70	3.5±0.1	354
11	28	7/0.127	0.22	0.82	7/0.16	AL	16/7/0.12	0.60	5.2±0.15	223
11	28	7/0.127	0.14	0.66	—	—	16/6/0.12	0.38	3.65±0.1	223
13	28	7/0.127	0.14	0.66	7/0.127	AL	16/5/0.12	0.53	4.5±0.15	223