


UL 20276 Computer Cable 多芯电脑线

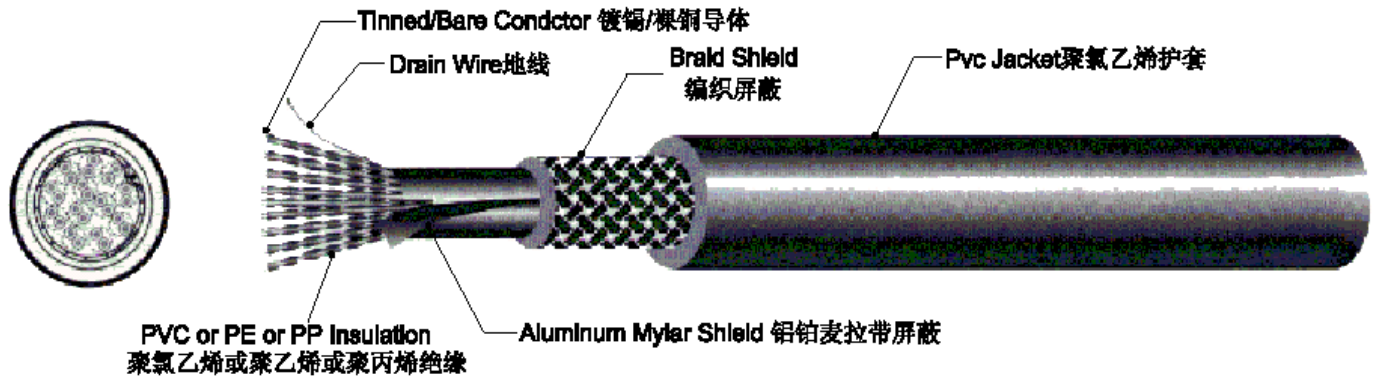

▽ AWM 20276 VW-1 80°C 30V E234411 BETTER C ▽ AWM I A 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 30V
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No.210.2
- Stranded, tinned or bare copper conductor
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring or external wiring of Class 2 systems equipment and electronic equipment

说明

- 额定温度: 80°C
额定电压: 30V
- 标准: UL758, UL1581及 CSA C22.2 No.210.2
- 导体使用绞合裸铜或镀锡铜线
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于2类电路电子设备内部或外部连线

Cores	Conductor 导体		insulation 绝缘		Drain wire	Overall Shield 外屏蔽		Jacket 护套		Maximum Resistance at 20°C 最大导体电 阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia	地线	Materi	Coverag	Nom. thick	Nom. Dia.	
芯线数	线规	线数/线径	绝缘厚 度 mm	外径 mm	No. /mm	材料	覆盖率	厚度 mm	外径 mm	
3P	26	7/0.16	0.26	1.0	—	PAPER	16/7/0.12	1.05	6.6±0.15	139
1C	26	7/0.16	0.26	1.0	—	PAPER	16/7/0.12	1.05	6.6±0.15	139
3P	28	7/0.127	0.12	0.63	7/0.16	AL	16/8/0.12	0.56	4.9±0.15	223
9C	28	7/0.127	0.12	0.63	7/0.16	AL	16/8/0.12	0.56	4.9±0.15	223
6P	28	7/0.127	0.12	0.63	7/0.127	PET	16/6/0.12	0.70	4.9±0.15	223
7P	28	7/0.127	0.12	0.63	—	PAPER	16/8/0.12	0.95	5.4±0.15	223
8P	28	7/0.127	0.12	0.63	7/0.127	PET	16/6/0.12	0.70	5.2±0.15	223
12P	28	7/0.127	0.12	0.63	7/0.2	AL	16/7/0.12	1.00	6.9±0.15	223
1C	28	7/0.127	0.12	0.63	7/0.2	AL	16/7/0.12	1.00	6.9±0.15	223
13P	28	7/0.127	0.12	0.63	7/0.2	AL	16/7/0.12	0.92	7.2±0.15	223
18P	28	7/0.127	0.12	0.63	—	AL	16/8/0.12	0.76	7.6±0.15	223
19P	30	7/0.1	0.15	0.6	7/0.127	AL	16/8/0.12	1.28	8.7±0.15	354
25P	30	7/0.1	0.15	0.60	7/0.127	AL	16/9/0.12	1.39	9.7±0.15	354
25P	28	7/0.127	0.12	0.63	—	AL	16/9/0.12	0.72	8.4±0.15	139