


UL 21394 conductor Cable 多芯电缆

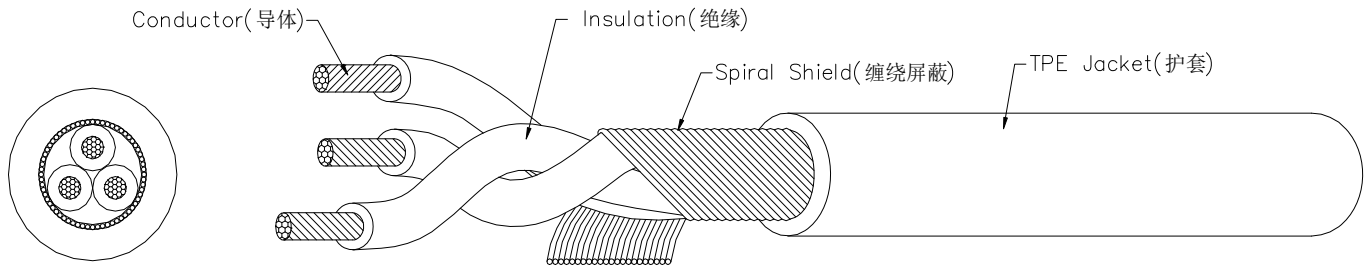

UL AWM 21394 VW-1 80°C 30V E234411 BETTER c UL AWM IA 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
- Rated voltage: 30V
- Reference standard: UL Subject 758 & UL1581
- Stranded, tinned or bare copper
- TPE jacket
- Passes UL VW-1 vertical flame test

APPLICATION

For internal external wiring of class 2 systems equipment and electronic equipment

说明

- 额定温度: 80°C
- 额定电压: 30V
- 标准: UL758, UL1581
- 导体使用绞合裸铜或镀锡软铜线
- 热塑性弹性体
- 通过UL VW-1垂直耐燃测试

应用

用于2类系统及视听电子设备内部连线

Conductor 导体		insulation 绝缘		Braid shield 编织屏蔽	Jacket 外被		Maximum Resistance at 20°C 最大导体电阻 Ω/km
AWG	NO. /mm	Nom. Thick.	Nom. Dia		Jacket thickness	Jacket. Dia	
线规	线数/线径	绝缘厚度 mm	外径 mm	No. /No. / mm	外被厚度 mm	外径 mm	
30	7/0.10	0.2	0.7	可选	平均最小厚度 0.381MM	/	354.24
28	7/0.127	0.2	0.8	可选		/	223.75
26	7/0.16	0.2	0.9	可选		/	139.73
24	11/0.16	0.2	1.05	可选		/	88.89
22	17/0.16	0.2	1.2	可选		/	57.52
20	26/0.16	0.2	1.35	可选		/	37.61
18	41/0.16	0.2	1.6	可选		/	23.85
16	26/0.254	0.2	1.9	可选		/	15.06