


UL 1185 Single Conductor Shielded Wire 单芯屏蔽电线

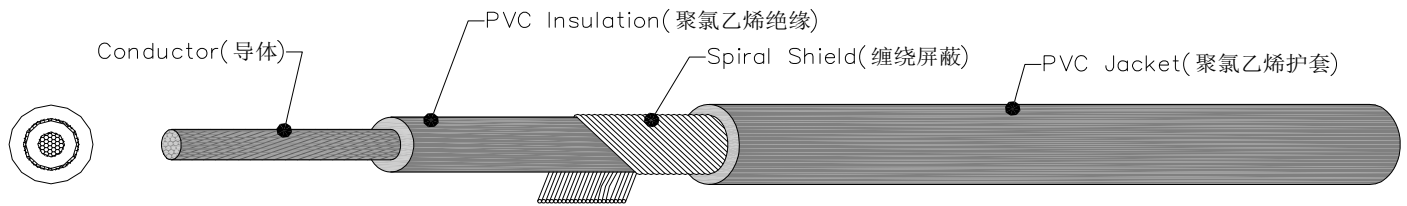

有 AWM 1185 AWG VW-1 80°C 300V E234411 BETTER c有 AWM I A 80°C 300V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 300V
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded or solid copper conductor, 30-4/0 AWG
- PVC insulation
- Tinned or bare copper wire, spiral shield
- PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For use in recording studios, sound systems and electronic circuits and power adaptor for portable PC.

说明

- 额定温度: 80°C
额定电压: 300V
- 标准: UL758, UL1581及
CSA C22.2 No. 210.2
- 导体使用30-4/0AWG单根或绞合裸铜或镀锡铜线
- 聚氯乙烯绝缘
- 镀锡铜或裸软铜线缠绕屏蔽
- 聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于录音、录影设备、音响系统、电子电路及手提电脑的变压器。

Conductor 导体			Insulation 绝缘		Spiral Shield 缠	Jacket 护套		Maximum Resistance at 20°C 最大导体电阻
AWG	NO. /mm	Dia	Nom. Thick.	Nom. Dia	No. /mm	Nom. thick	Nom. Dia.	Ω/km
线规	线数/线径	外径 mm	绝缘厚度 mm	外径 mm	线数/线径	厚度 mm	外径 mm	
28	7/0.127	0.39	0.38	1.20	34/0.12	0.70	2.85±0.10	223.75
26	7/0.16	0.49	0.38	1.30	36/0.12	0.70	2.95±0.10	139.73
24	11/0.16	0.61	0.38	1.40	38/0.12	0.70	3.05±0.10	88.89
22	17/0.16	0.76	0.38	1.55	42/0.12	0.70	3.20±0.10	57.52
20	26/0.16	0.94	0.38	1.70	45/0.12	0.70	3.40±0.10	37.61
18	41/0.16	1.18	0.38	1.95	53/0.12	0.70	3.60±0.10	23.85
16	26/0.254	1.49	0.38	2.25	60/0.12	0.70	3.90±0.10	15.06