


UL 2576 Computer cable 电脑线

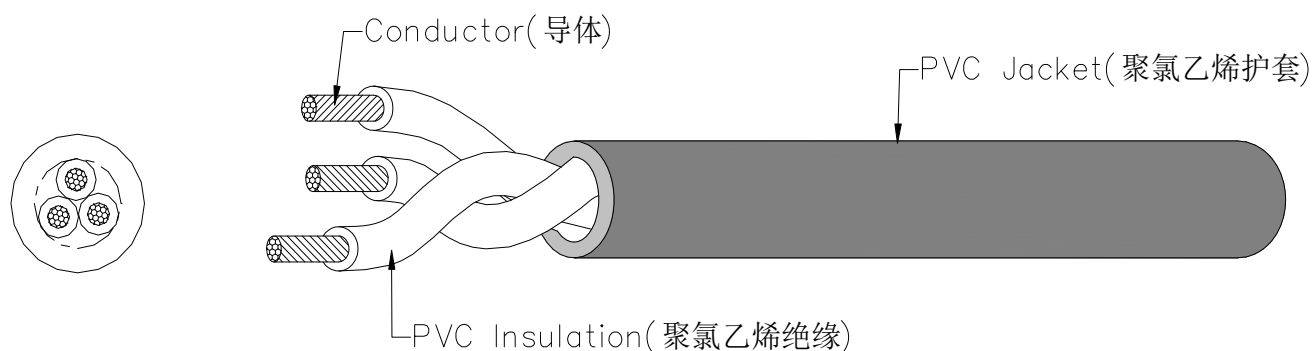

▽ AWM 2576 VW-1 80°C 150V E234411 BETTER C ▽ AWM I A 80°C 150V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 150V
- Reference standard: UL subject 758, UL1581 & CSA C22.2 No.210.2
- Stranded, tinned or bare copper conductor
- Colour coded lead free PVC insulation
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For external interconnection or internal wiring of electronic equipment

说明

- 额定温度：80°C
额定电压：150V
- 标准：UL758，UL1581及
CSA C22.2 No. 210.2
- 导体使用绞合裸铜或镀锡铜线
- 无铅聚氯乙烯绝缘
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子设备内部及外部连线

Cores	Conductor 导体		insulation 绝缘		Jacket 护套		Maximum Resistance at 20°C 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia			
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	Nom. Thick. 厚度 mm	Nom. Dia 外径 mm	
3	22	7/0.254	0.26	1.3	0.87	4.6	57.5
4	22	7/0.254	0.26	1.3	0.87	5.0	57.5