


UL 1571 Hook-up Wire 连接线

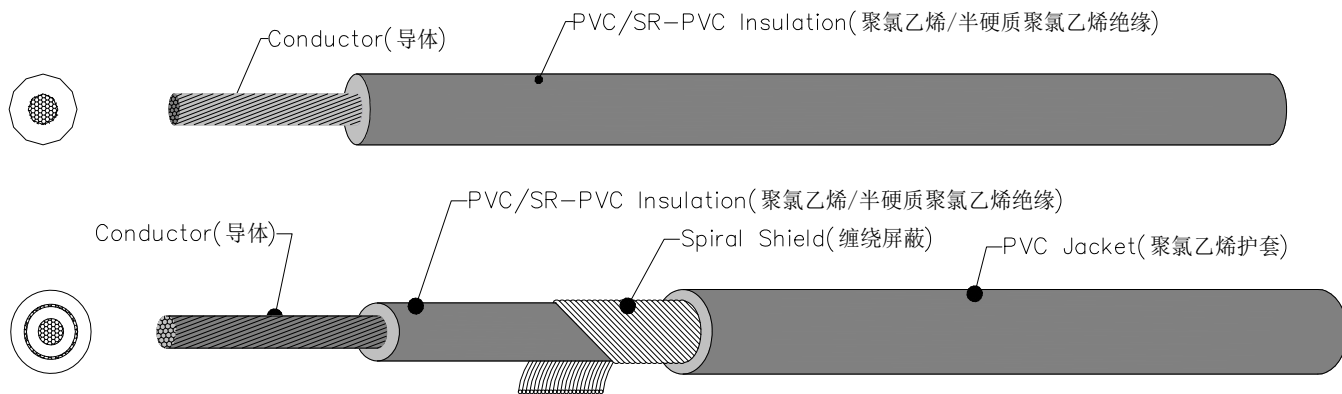

有 AWM 1571 AWG VW-1 80℃ 30V E234411 BETTER c有 AWM I A 80℃ 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80℃
Rated voltage: 30V
- Reference standard: UL Subject 758, UL 1581 & CSA C22.2 No.210.2
- Tinned or bare, stranded, Top coated, Over coated copper wire or solid copper conductor copper wire, 50AWG minimum
- Colour-coded lead free PVC or SR-PVC insulation
- Uniform insulation thickness to ensure easy stripping and cutting
- Passes UL VW-1 & CSA FT1 vertical flame test
- Ultra fine version are available

APPLLCATION

For internal wiring of electronic and electrical equipment, and power adaptor for portable PC

说明

- 额定温度：80℃
额定电压：30v
- 标准：UL758，UL1581及
CSA C22.2 No. 210.2
- 导体使用50AWG以上单根或绞合裸铜、裸铰镀、镀绞镀或镀锡铜线
- 无铅聚氯乙烯或半硬质聚氯乙烯绝缘
- 绝缘厚度均匀，方便剥皮及剪裁
- 通过UL VW-1及CSA FT1垂直耐燃测试
- 另可挑选超细电子线

应用

用於电子、电器设备内部连线及手提电脑的变压器

TYPE	Conductor 导体		Insulation 绝缘		Spiral Shield 缠绕屏蔽	Jacket 护套		Standard Put-Up	Maximum Resistance at 20℃ 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia					
	线规	线数/线径	绝缘厚度 mm	外径 mm	线数/线径	Nom. thick 厚度 mm	Nom. Dia. 外径 mm	标准长度 M/Coil	
Single 单支线	30	7/0.10	0.20	0.70	—	—	—	610	354.24
	28	7/0.127	0.20	0.80	—	—	—	610	223.75
	26	7/0.16	0.20	0.90	—	—	—	610	139.73
	24	11/0.16	0.20	1.05	—	—	—	610	88.89
	22	17/0.16	0.20	1.20	—	—	—	610	57.52
	20	26/0.16	0.20	1.40	—	—	—	610	37.61
Shield 屏蔽线	30	7/0.10	0.25	0.80	28/0.10	0.30	1.60±0.10	610	354.24
	28	7/0.127	0.25	0.90	32/0.10	0.30	1.70±0.10	610	223.75
	26	7/0.16	0.25	1.00	34/0.10	0.30	1.80±0.10	610	139.73
	24	11/0.16	0.25	1.15	40/0.10	0.30	2.00±0.10	610	88.89
	22	17/0.16	0.25	1.30	37/0.12	0.30	2.20±0.10	610	57.52
	20	26/0.16	0.25	1.50	42/0.12	0.30	2.40±0.10	610	37.61
	18	41/0.16	0.25	1.70	47/0.12	0.30	2.60±0.10	610	23.85
	16	26/0.254	0.25	2.00	54/0.12	0.30	2.90±0.10	610	15.06