


UL 2532 conductor Cable 多芯电缆

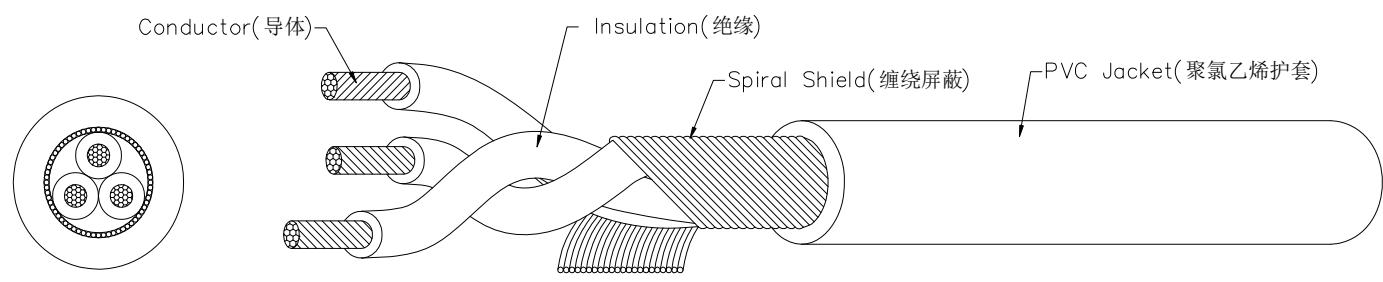

⚡ AWM 2532 VW-1 80°C 30V E234411 BETTER C ⚡ AWM I A 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature:80°C  
Rated voltage:30V
- Reference standard:UL subject 758, UL1581 & CSA C22.2 No.210.2
- Stranded, bare or tinned copper conductor 40 AWG min.
- Lead free PVC jacket
- Passes UL VW-1& CSA FT1 vertical flame test

APPLICATION

For internal wiring and external interconnection of electronic equipment

说明

- 额定温度：80℃  
额定电压：30V
- 标准：UL758，UL1581及 CSA C22. 2 No. 210. 2
- 导体使用绞合裸铜或镀锡铜线 40AWG 最小
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用於电子设备内部及外部连线

| Cores          | Conductor<br>导体 |          | insulation<br>绝缘 |          | Braid<br>shield<br>编织屏蔽 | Jacket<br>外被                      |             | Maximum<br>Resistance<br>at 20°C<br>最大导体电阻<br>Ω/km |
|----------------|-----------------|----------|------------------|----------|-------------------------|-----------------------------------|-------------|----------------------------------------------------|
|                | AWG             | NO. /mm  | Nom. Thick.      | Nom. Dia |                         | Jacket<br>thickness               | Jacket. Dia |                                                    |
| 芯线数            | 线规              | 线数/线径    | 绝缘厚度<br>mm       | 外径<br>mm | No. /No. /<br>mm        | 外被厚度<br>mm                        | 外径<br>mm    |                                                    |
| Optional<br>可选 | 30              | 7/0.10   | 0.381            | 1.1      | Optional<br>可选          | 护套下的直径是17.8或者更小:<br>外被厚度<br>0.762 | /           | 354.24                                             |
|                | 28              | 7/0.127  | 0.381            | 1.2      |                         |                                   | /           | 223.75                                             |
|                | 26              | 7/0.16   | 0.381            | 1.3      |                         |                                   | /           | 139.73                                             |
|                | 24              | 11/0.16  | 0.381            | 1.4      |                         |                                   | /           | 88.89                                              |
|                | 22              | 17/0.16  | 0.381            | 1.55     |                         |                                   | /           | 57.52                                              |
|                | 20              | 26/0.16  | 0.381            | 1.75     |                         |                                   | /           | 37.61                                              |
|                | 18              | 41/0.16  | 0.381            | 2.0      |                         |                                   | /           | 23.85                                              |
|                | 16              | 26/0.254 | 0.381            | 2.3      |                         |                                   | /           | 15.06                                              |