


UL 2842 conductor Cable 多芯电缆

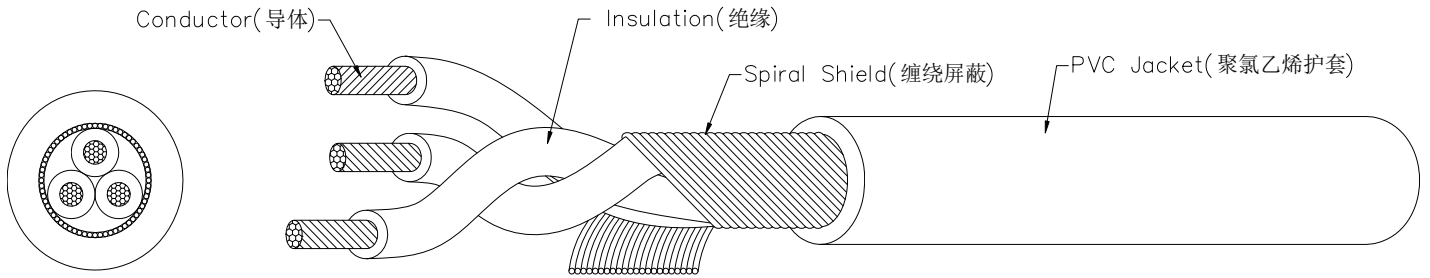

UL AWM 2842 VW-1 80°C 30V E234411 BETTER C

UL AWM I A 80°C 30V FT1

PRODUCT DESCRIPTION

- Rated temperature: 80°C
Rated voltage: 30V
- Reference standard: UL subject 758, UL1581 & CSA C22.2 No.210.2
- Stranded, bare or tinned copper conductor 40 AWG min.
- Lead free PVC jacket
- Passes UL VW-1 & CSA FT1 vertical flame test

APPLICATION

For internal wiring and external interconnection of electronic equipment

说明

- 额定温度: 80°C
额定电压: 30V
- 标准: UL758, UL1581及 CSA C22.2 No. 210.2
- 导体使用绞合裸铜或镀锡铜线 40AWG 最小
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用于电子设备内部及外部连线

Cores	Conductor 导体		insulation 绝缘		Braid shield 编织屏蔽	Jacket 外被		Maximum Resistance at 20°C 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia		Jacket thickness	Jacket. Dia	
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	No. /No. / mm	外被厚度 mm	外径 mm	
Optional 可选	30	7/0.10	0.203	0.7	Optional 可选	护套下的直径是25.4或者更小: 外被厚度 1.15	/	354.24
	28	7/0.127	0.203	0.8			/	223.75
	26	7/0.16	0.203	0.9			/	139.73
	24	11/0.16	0.203	1			/	88.89
	22	17/0.16	0.203	1.2			/	57.52
	20	26/0.16	0.203	1.35			/	37.61
	18	41/0.16	0.203	1.6			/	23.85
	16	26/0.254	0.203	1.9			/	15.06