


UL 2493 conductor Cable 多芯电缆

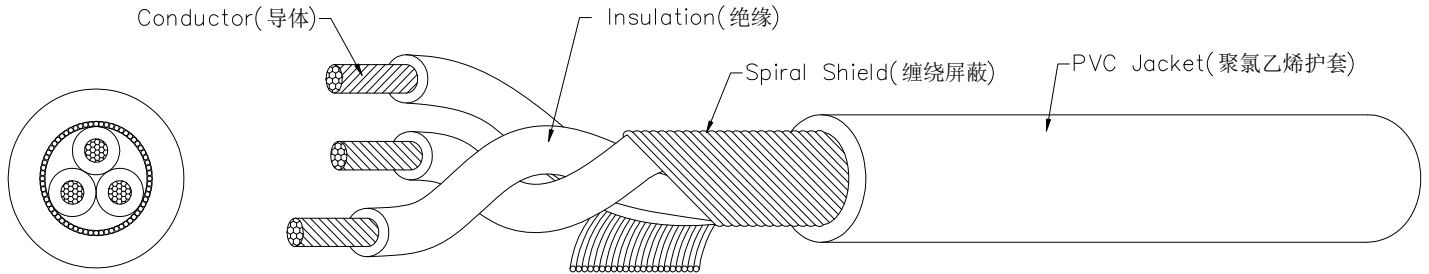

▽△ AWM 2493 VW-1 60℃ 30V E234411 BETTER C ▽△ AWM I A 60℃ 30V FT1

PRODUCT DESCRIPTION

- Rated temperature:60℃
Rated voltage:not specified
- Reference standard:UL subject 758, UL1581 & CSA C22.2 No.210.2
- Stranded, bare or tinned copper conductor 30-16AWG.
- Lead free PVC jacket
- Passes UL VW-1& CSA FT1 vertical flame test

APPLICATION

For internal wiring and external interconnection of electronic equipment

说明

- 额定温度：60℃
额定电压：未指定
- 标准：UL758，UL1581及 CSA C22.2 No.210.2
- 导体使用绞合裸铜或镀锡铜线 30-16AWG
- 无铅聚氯乙烯护套
- 通过UL VW-1及CSA FT1垂直耐燃测试

应用

用於电子设备内部及外部连线

Cores	Conductor 导体		insulation 绝缘		Spiral Shield 缠绕屏蔽	Jacket 外被		Maximum Resistance at 20℃ 最大导体电阻 Ω/km
	AWG	NO. /mm	Nom. Thick.	Nom. Dia		Jacket thickness	Jacket. Dia	
芯线数	线规	线数/线径	绝缘厚度 mm	外径 mm	No. /mm	外被厚度 mm	外径 mm	
Optional 可选	30	7/0.10	0.153	0.65	Optional可 选	护套下的直 径是10.8或 者更小： 外被厚度 1.15	/	354.24
	28	7/0.127	0.153	0.7			/	223.75
	26	7/0.16	0.153	0.8			/	139.73
	24	11/0.16	0.153	0.95			/	88.89
	22	17/0.16	0.153	1.1			/	57.52
	20	26/0.16	0.153	1.25			/	37.61
	18	41/0.16	0.153	1.5			/	23.85
	16	26/0.254	0.153	1.8			/	15.06