


PSMX series

Integrated vacuum suction system-Built-in vacuum type

集成式真空吸具系统-内置真空型

60

吸具宽度
Suction tool width

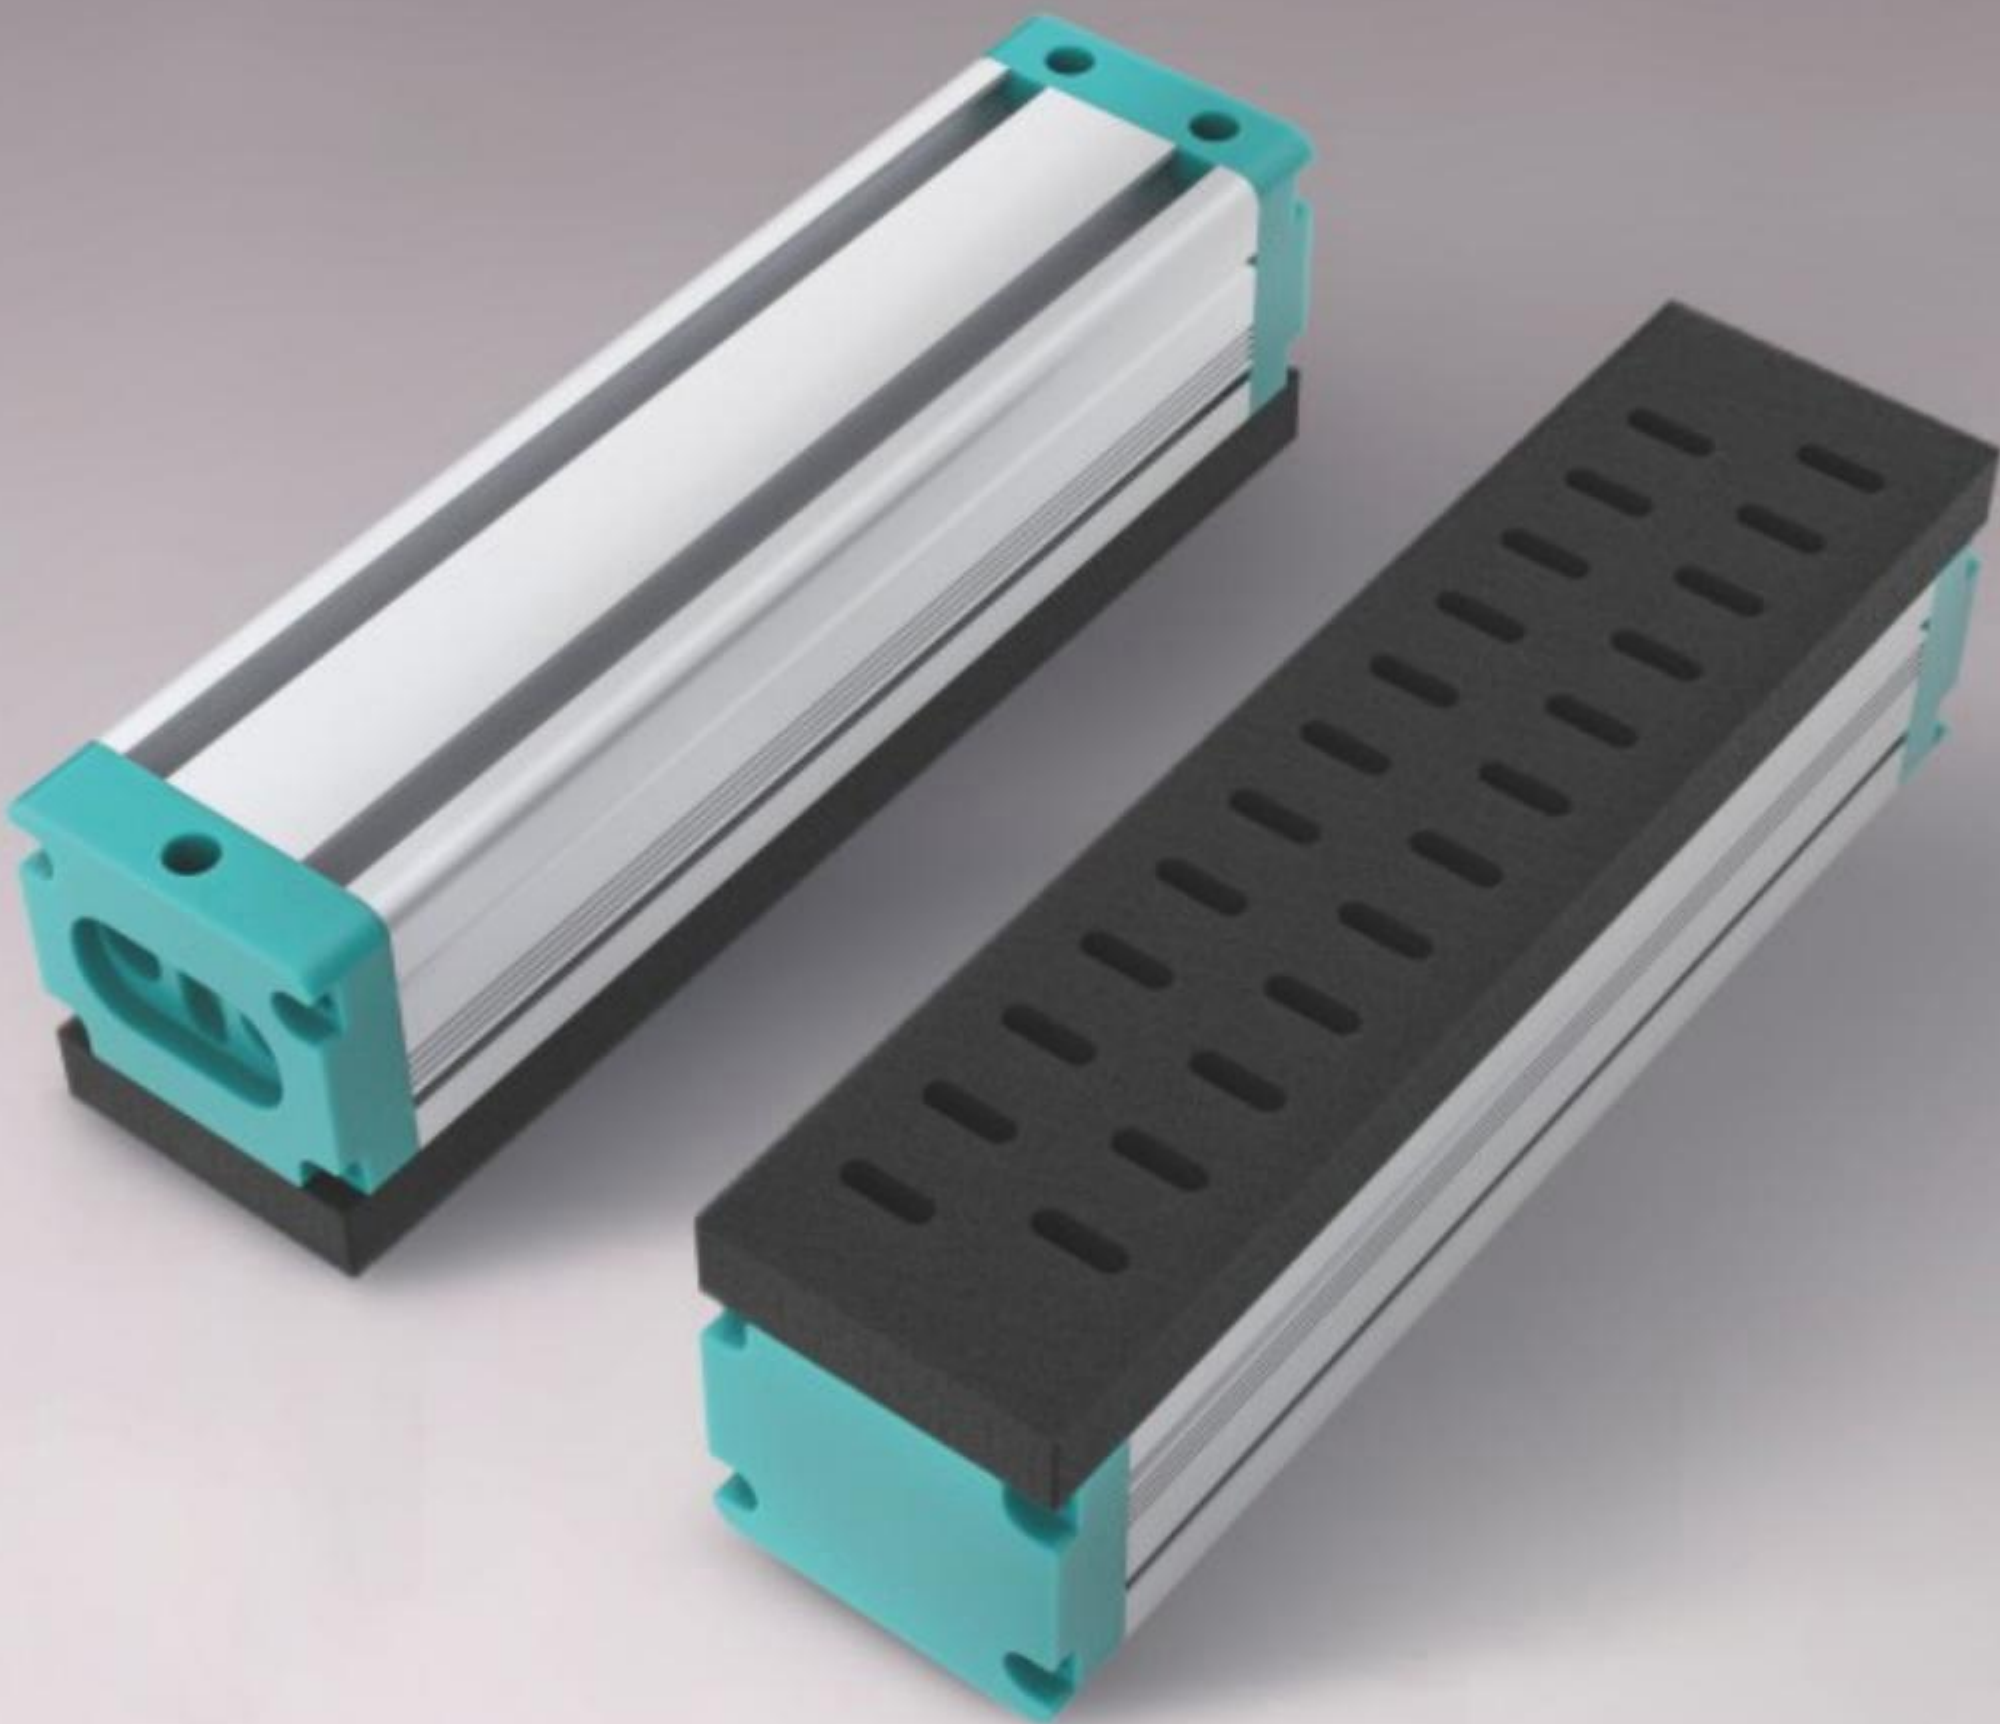

型号表示方式 Model representation

PSMX 20 - 60×240 - ES - L1 - R2

① 海绵厚度
Sponge thickness

代码 Code	直径 Diameter
15	15mm
20	20mm

② 吸具规格
Specification of
suction tool

宽×长 Width × length
60X240
60X310
60X415
60X550
60X645

③ 阀体类型
Body type


代码 Code	形状 Shape
ES	节流型 Throttling type
AW	止回型(不可侧吸) Check type (Non side suction allowed)
SW	止回型(可侧吸) Check type (Side suction possible)

④ 发生器规格
Generator specification

代码 Code	最大真空流量 Maximum vacuum flow
空白 Blank	无内置发生器 No built-in generator
L1	350L/min
L2	700L/min

⑤ 海绵布孔方式
Sponge cloth hole method

R2	标准2排孔 Standard 2-row holes
RL2	2排孔带过滤网 2-row perforated filter screen

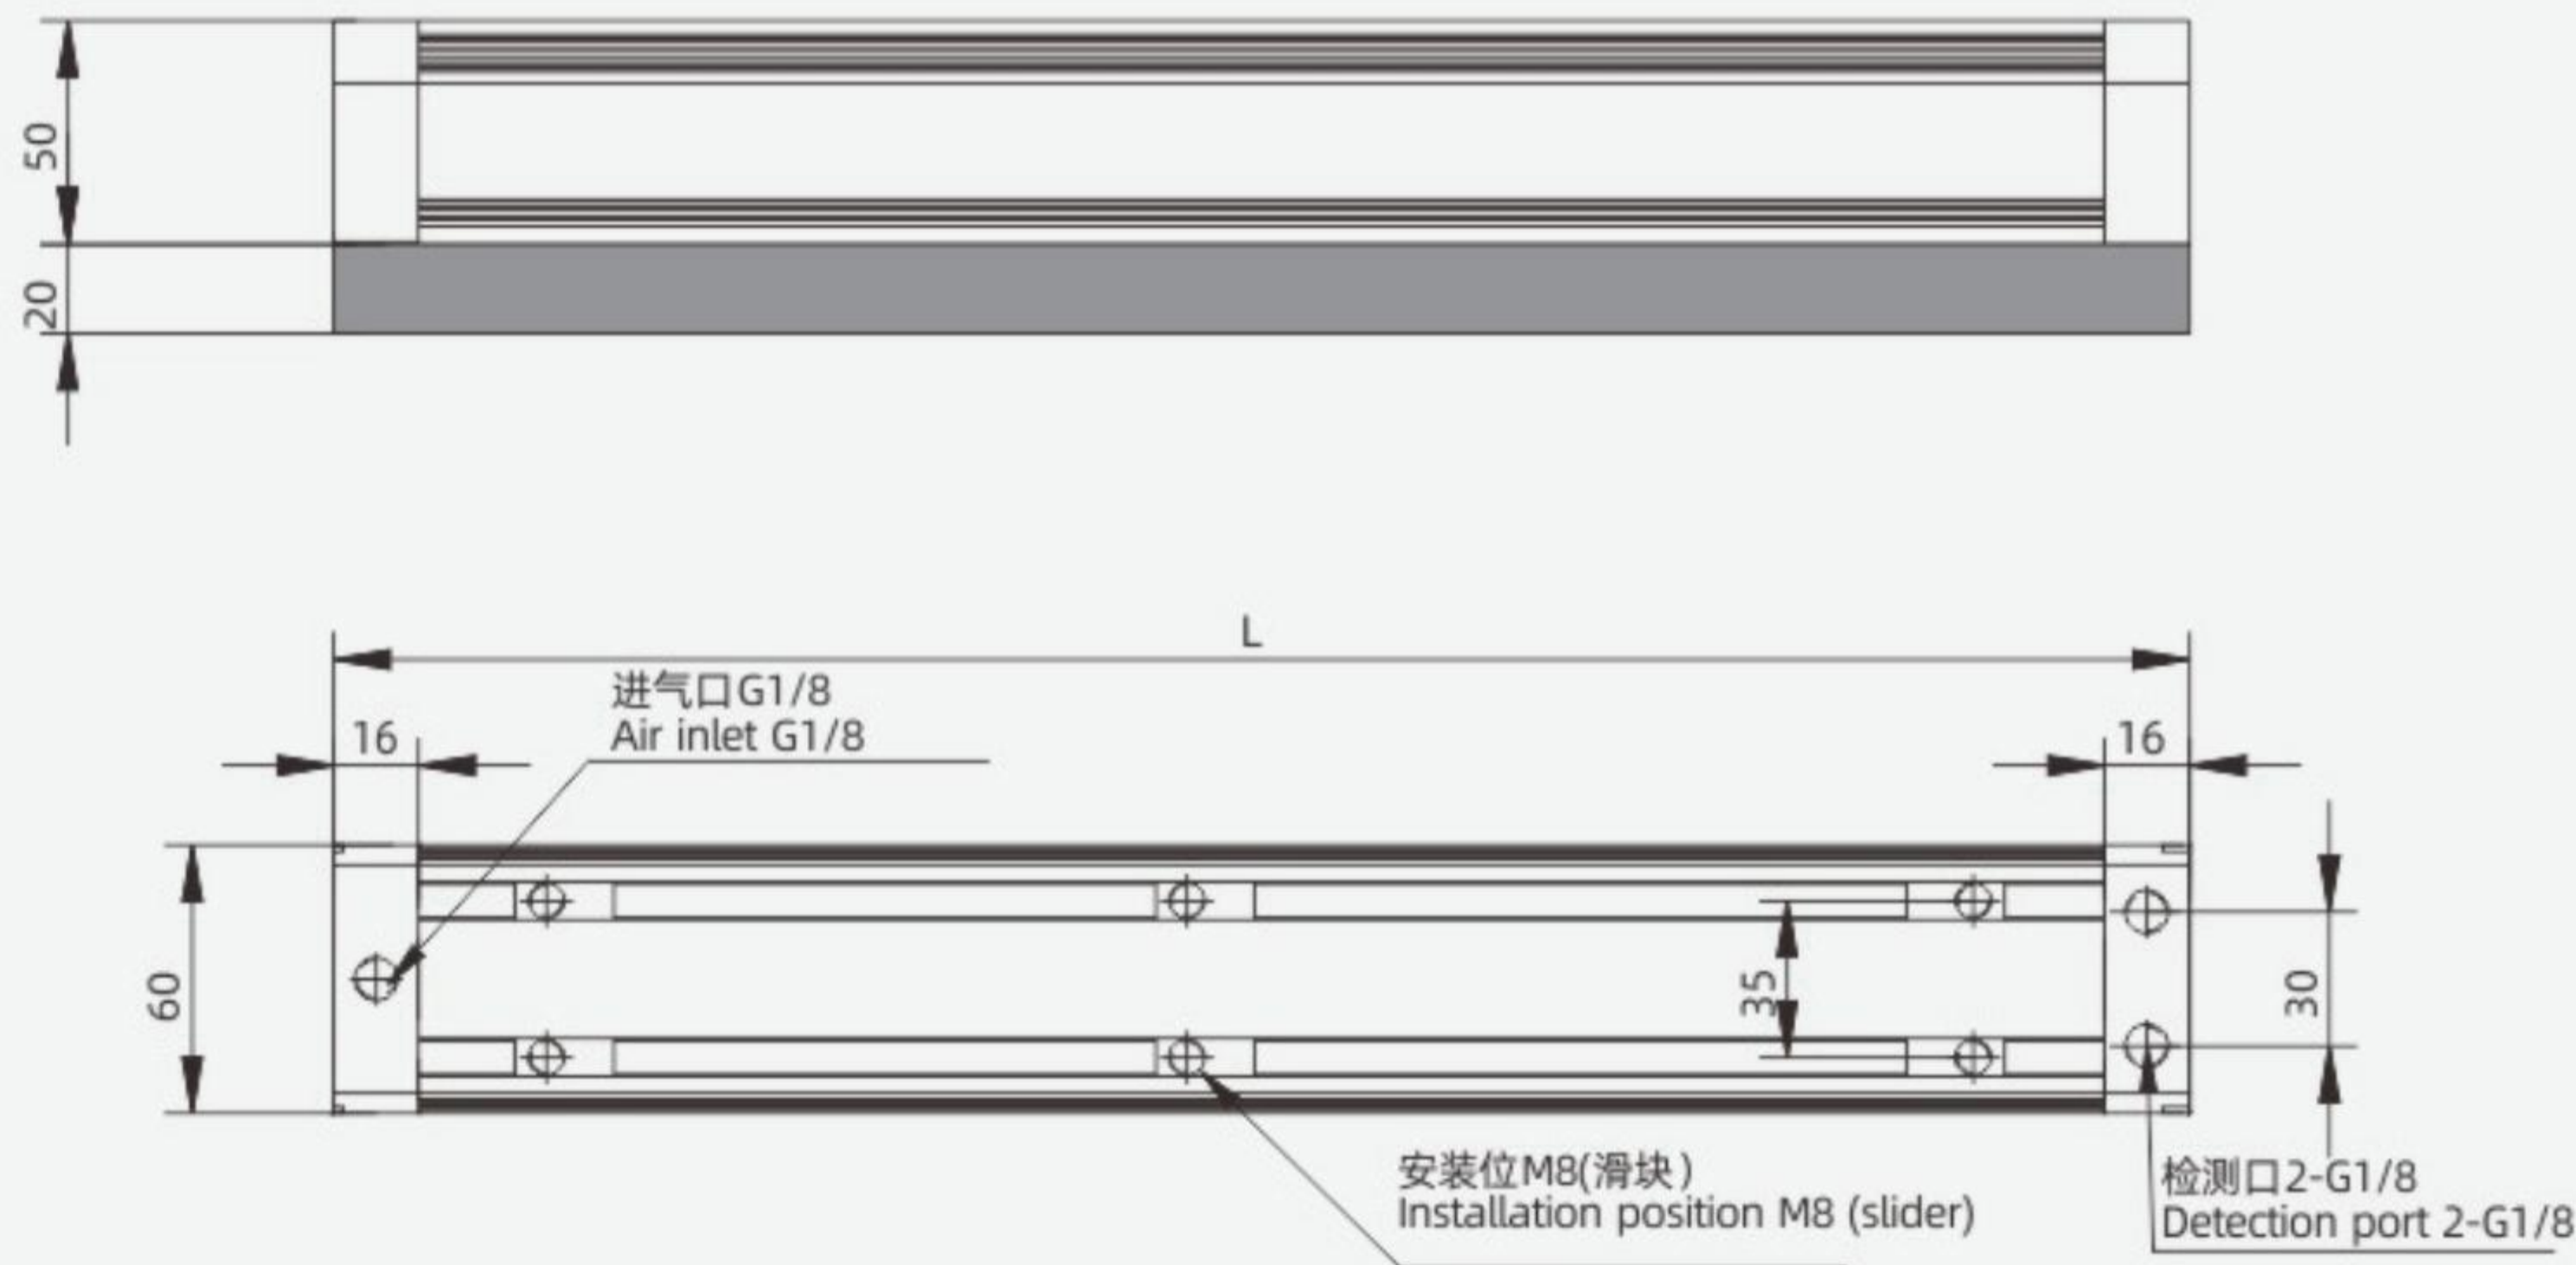

型号 Model	空气消耗量 Air consumption L/min	最大真空流量 Maximum vacuum flow rate L/min	最大真空度 Maximum vacuum -kPa	理论吸力 N/-60Kpa Theoretical suction N/-60Kpa	重量 Weight kg	L
PSMX20. 60×240. ES. L1	90	350	-72	137	0.8	240
PSMX20. 60×310. ES. L1	90	350		180	1.0	310
PSMX20. 60×415. ES. L1	90	350		248	1.3	415
PSMX20. 60×550. ES. L2	180	700		338	1.6	550
PSMX20. 60×645. ES. L2	180	700		401	1.9	645

* 吸具长度可随意分切尺寸，宽度不变。
* The length of the suction tool can be slit and the width is constant.