


PSMX series

Integrated vacuum suction system-Built-in vacuum type

集成式真空吸具系统-内置真空型

80

吸具宽度
Suction tool width

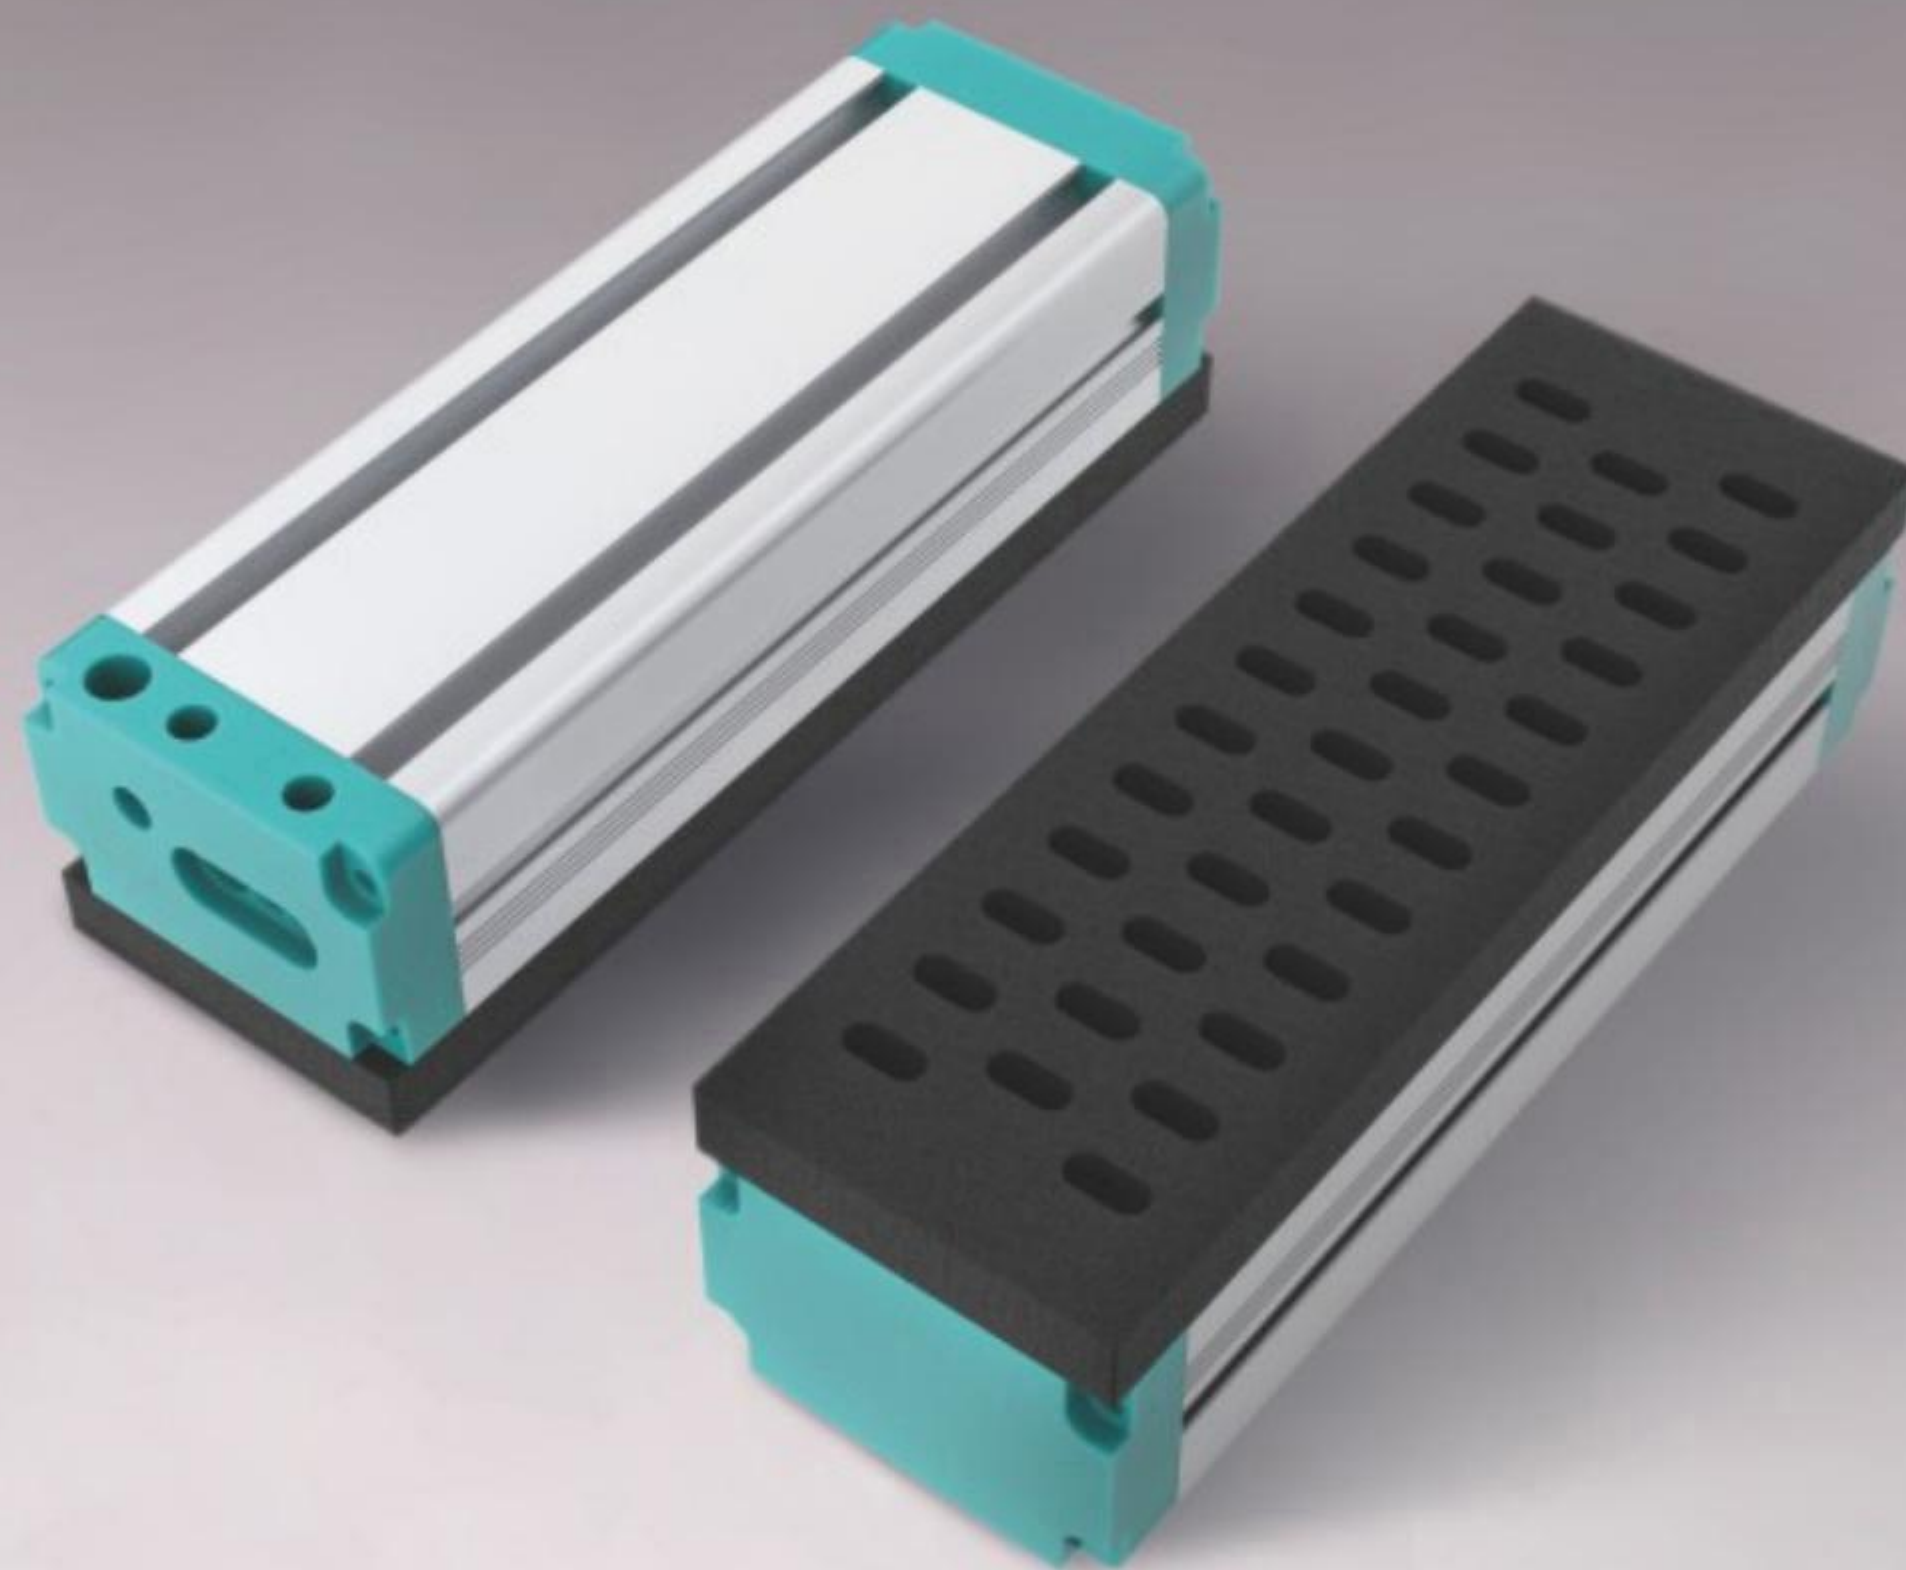

型号表示方式 Model representation

PSMX 20 - 80×240 - ES - L2 - R3

① 海绵厚度
Sponge thickness

代码 Code	直径 Diameter
15	15mm
20	20mm

② 吸具规格
Specification of
suction tool

宽×长 Width × length
80X240
80X310
80X415
80X550
80X645
80X800

③ 阀体类型
Body type

代码 Code	形状 Shape
ES	节流型 Throttling type
AW	止回型(不可侧吸) Check type (Non side suction allowed)
SW	止回型(可侧吸) Check type (Side suction possible)


④ 发生器规格
Generator specification

代码 Code	最大真空流量 Maximum vacuum flow
空白 Blank	无内置发生器 No built-in generator
L2	700L/min
L3	1040L/min


⑤ 海绵布孔方式
Sponge cloth hole method

R3	标准3排孔 Standard 3-row holes
R3	3排孔带过滤网 3-row perforated filter screen

内置真空发生器款
Built in vacuum generator model

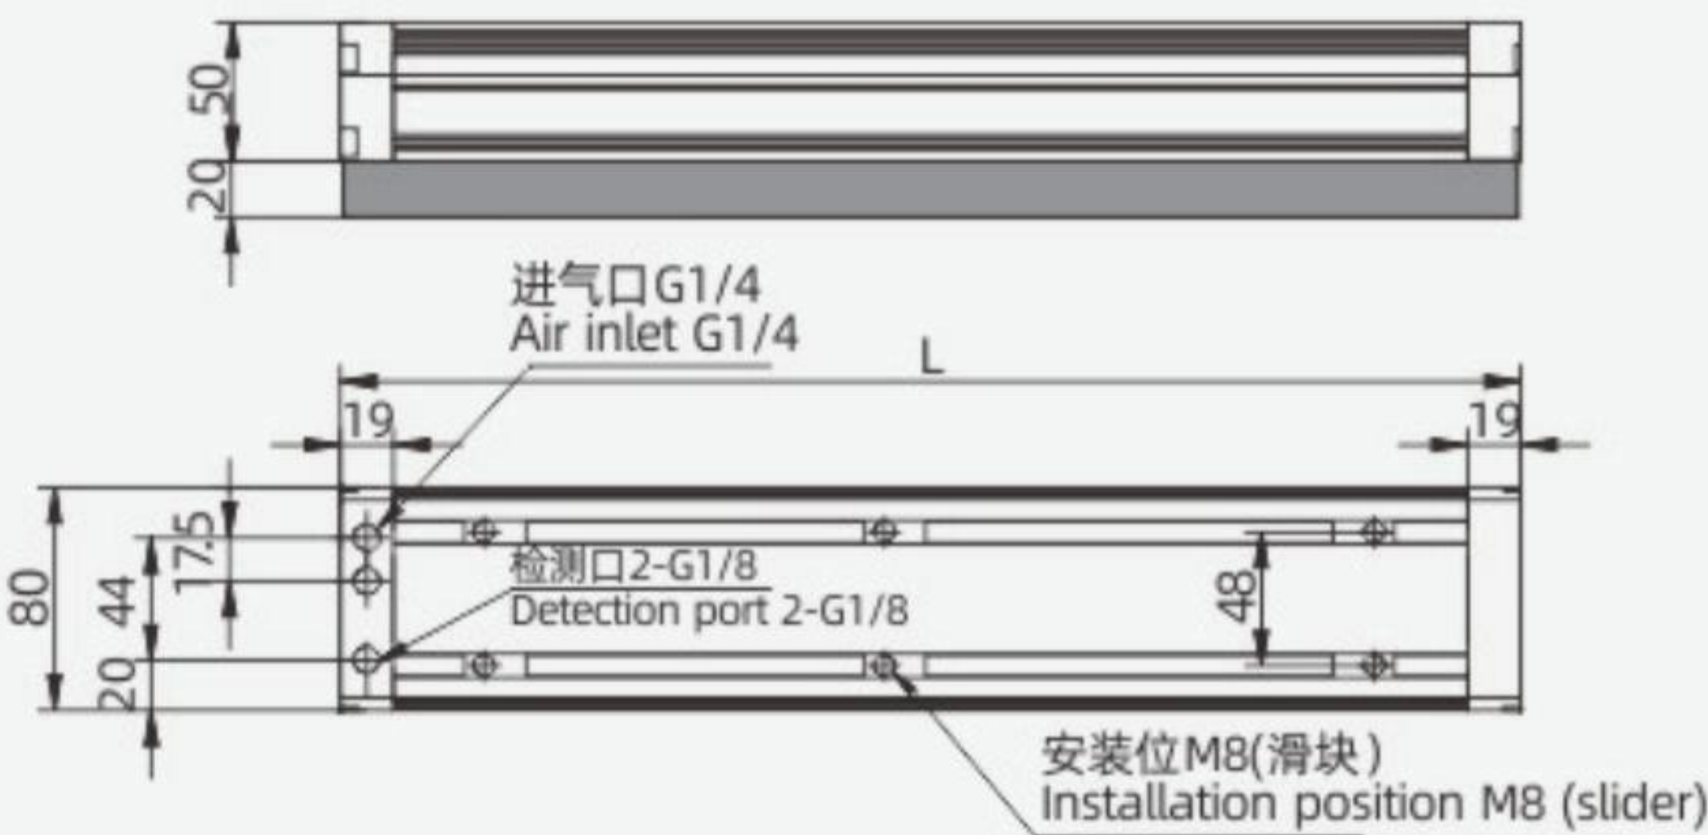

无内置发生器款
Version without built-in generator

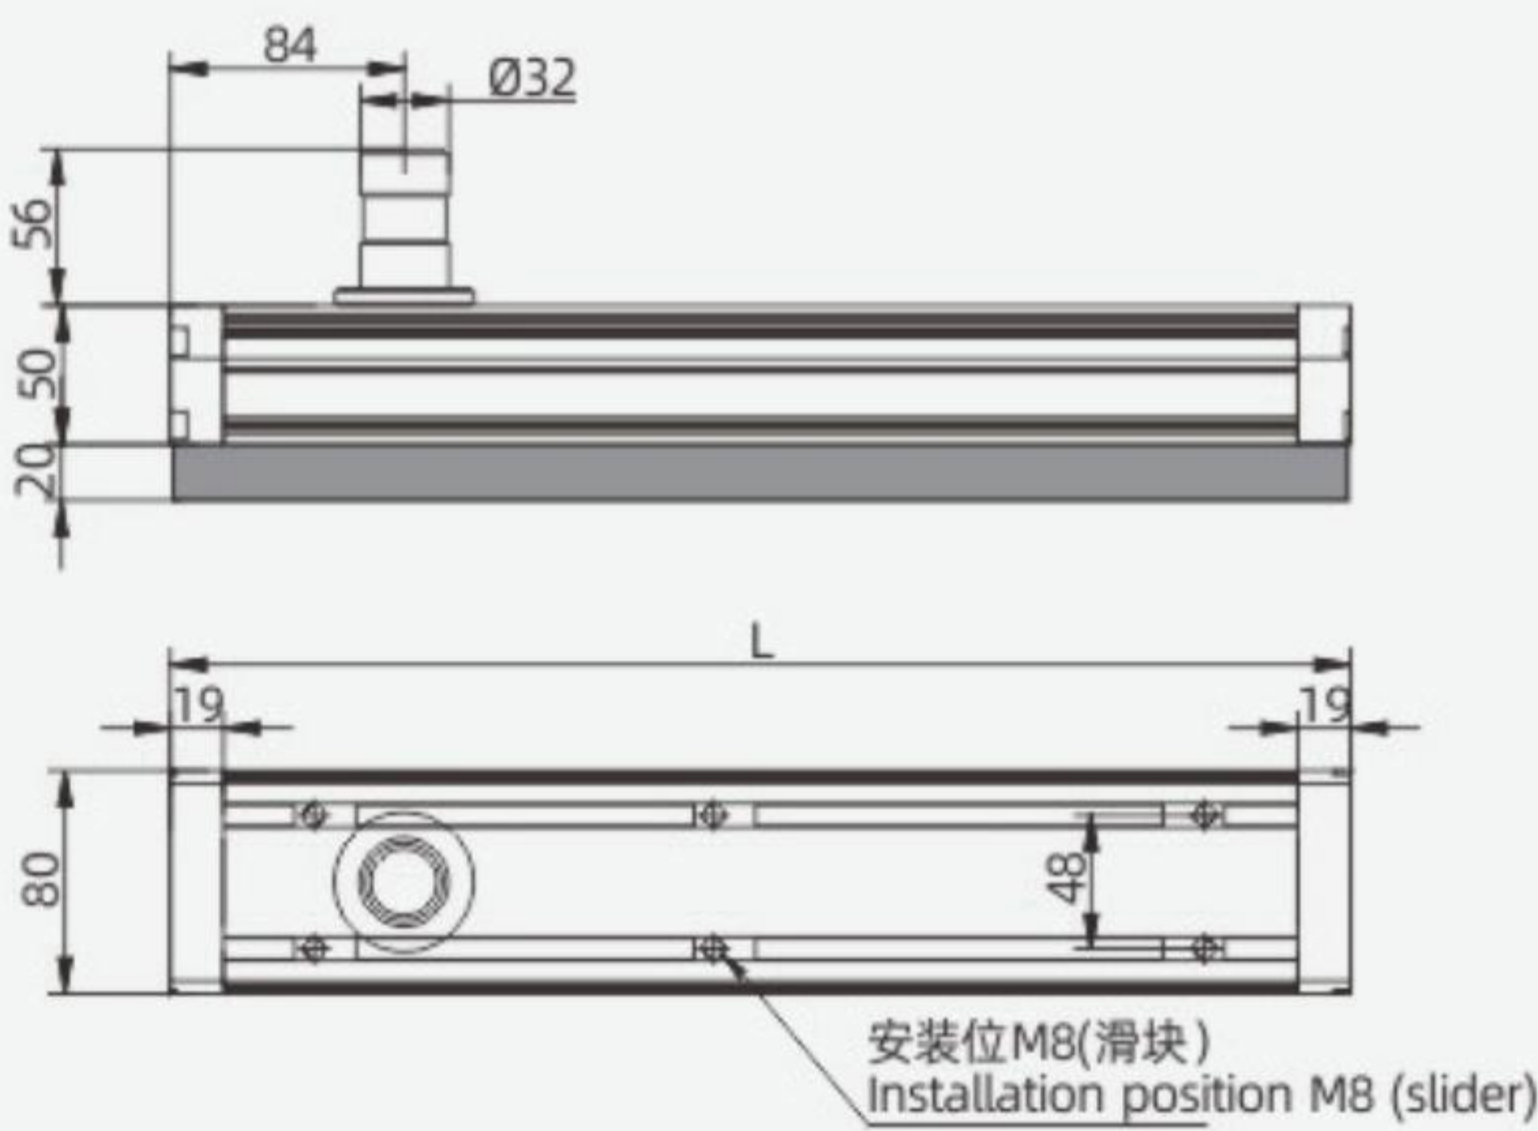

型号 Model	空气消耗量 Air consumption L/min	最大真空流量 Maximum vacuum flow rate L/min	最大真空度 Maximum vacuum -kPa	理论吸力N/-60Kpa Theoretical suction N/-60Kpa	重量 Weight kg	L
PSMX20. 80×240. ES. L1	90	350	-72	197	1.1	240
PSMX20. 80×310. ES. L1	90	350		265	1.3	310
PSMX20. 80×415. ES. L1	90	350		367	1.7	415
PSMX20. 80×550. ES. L2	180	700		485	2.1	550
PSMX20. 80×645. ES. L2	180	700		587	2.4	645
PSMX20. 80×800. ES. L2	180	700		739	3.0	800

* 吸具长度可随意分切尺寸，宽度不变。
* The length of the suction tool can be slit and the width is constant.