


Parameters:

Voltage	Single phase 220V/230V
Frequency	50Hz
Input current	0.9A
Input power	200W
Speed	1400r/min
Air flow	11.2m ³ /min
Static pressure	370Pa
Noisy	60dB(A)
Capacitor	3.5μF/500V
Weight	3.5kg
Protection Class	IP32


Air performance curves:

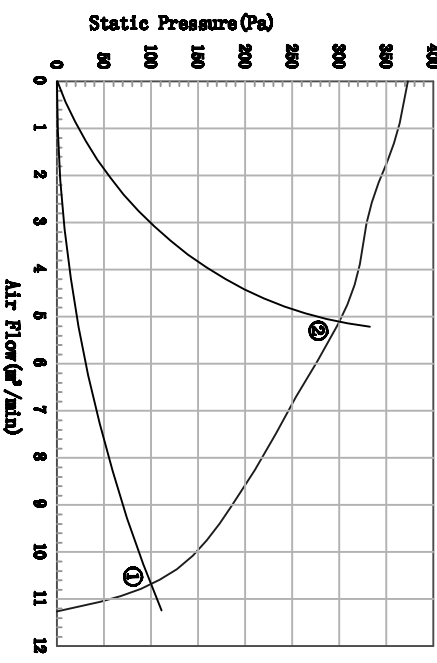

Ambient:

1. Temperature: -40°C~+55°C
2. Relative Humidity: ≤90%
3. Pressure: 55Kpa(4000m)
4. Vibrations: 10~55Hz, Double amplitude 1.5mm
5. Impact: 15Nm/s²(Peak Acceleration)

Wiring Diagram:



Working range:

Frequency	Point①	Point②
50Hz	100Pa~10.6m ³ /min	300Pa~5.1m ³ /min

Design	Date	Specification Name: J4 Center: J4 Type: 130FLJ2850V-2100F
Draw	Date	
Check	Date	
Approve	Date	

TEGYSYSTEM SHANGHAI

