


# 铁钴合金

## YEP<sup>®</sup>-2V

Permendur YEP<sup>TM</sup>-2V

通过在马达铁芯上采用高磁通密度软磁性铁钴合金材料，实现马达的小型·轻量·高功率化

Soft magnetic alloy with high saturated flux density "permendur" contributes to the realization of a compact, lightweight, high-power motor.

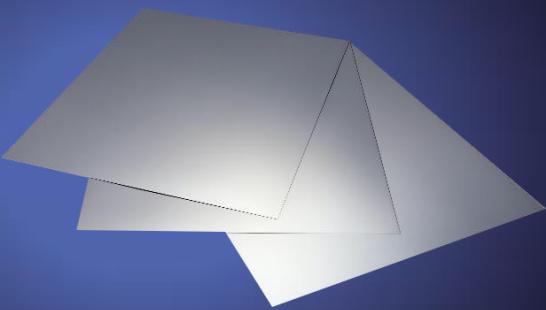

### 马达相关技术领域

#### 概要

YEP<sup>®</sup>-2V是Fe-49Co-2V合金，在软磁材料中具有高饱和磁通密度、对马达和执行器的小型轻量化、高功率化有贡献。

YEPM<sup>TM</sup>-2V (Fe-49Co-2V in mass%) has high saturated magnetic flux density, which realizes compact, lightweight, high-power motors and responsive actuators.

#### 用途

马达铁芯

Motor core

执行器铁芯

Actuator core


#### 特长

##### 初始直流磁化曲线

Initial D.C. magnetization curve

##### ■相比3%硅钢片更容易磁化

YEP-2V shows higher magnetization than Fe-3mass%Si steel.

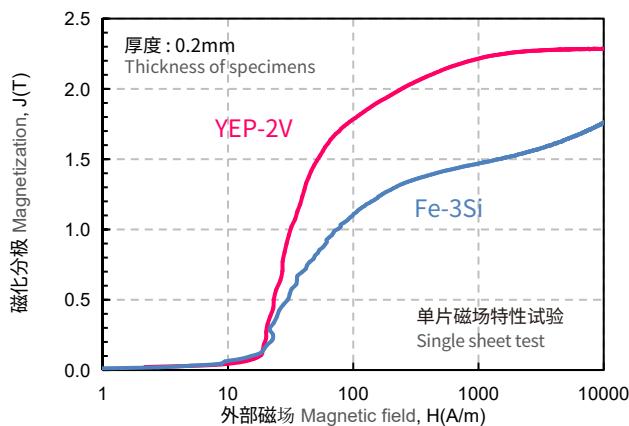


##### 铁损特性

Iron loss curve

##### ■相比3%硅钢片铁损更低

YEP-2V shows smaller iron loss than Fe-3mass%Si steel.

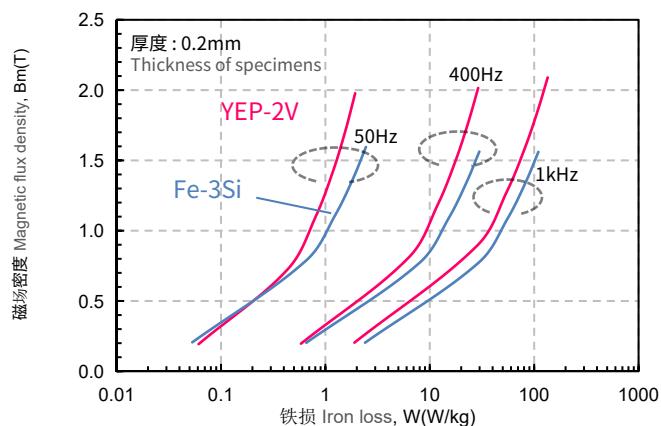


##### 积层铁芯例

Example of laminated core



##### 分割铁芯 (激光焊接)

Segmented core (laser welding)

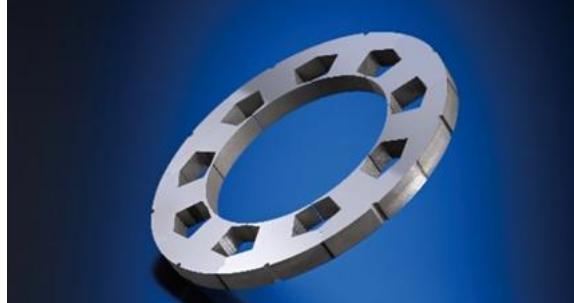

咨询窗口

博迈立铖投资（中国）有限公司

特殊钢部门

上海长宁路1133号长宁来福士广场T1写字楼1501室

总机：(86)21-33663000

本目录中的特性值、照片、图表、排名、评估等均为基于本公司测试数据的代表值，并不保证产品质量。本目录中的信息如有变更，恕不另行通知。

