


α Pro C

DALI-2 Emergency Module for LED Linear Luminaires

适用于 LED 线条型灯具的带 DALI 接口和自检功能的应急电源

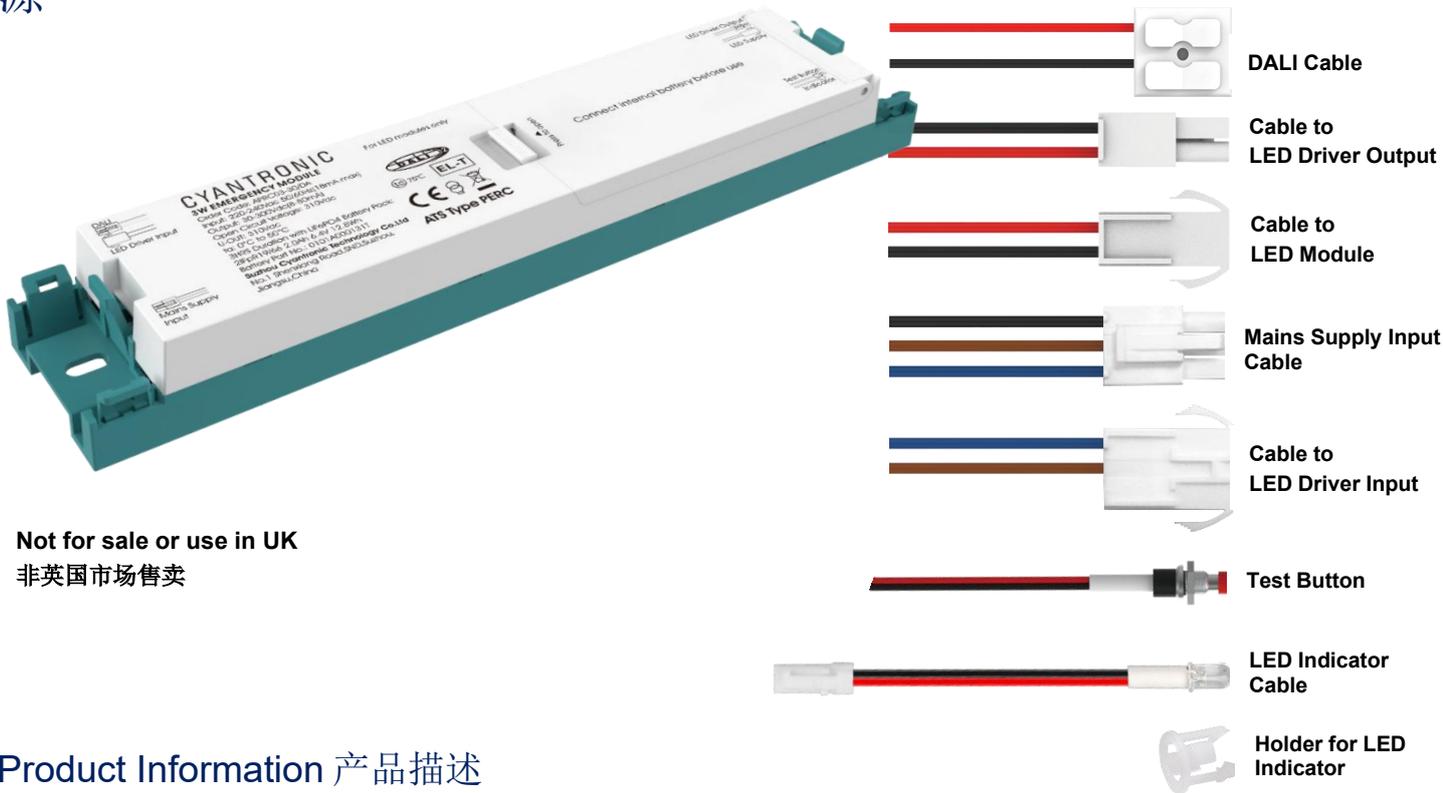

Not for sale or use in UK
非英国市场售卖

Product Information 产品描述

This emergency module with DALI interface and automatic test function can be used built-in for the LED luminaires with integrated LEDs. It is designed for installing within the fitting to provide a battery back-up supply in the event of a power cut. The emergency module requires a permanent live un-switched supply to maintain the battery charge. In the event of a power cut the battery will supply the luminaire at a reduced output.

A DALI command from a suitable control unit can be used to initiate function and duration tests at individually selected times. Status flags are set for report back and data logging of results.

此具有 DALI 接口和自检功能的应急电源适用于 LED 灯具，可安装于灯具内部。应急电源需要持续通电以维持电池电量。在停电的情况下，电池以较低的功率给灯具中 LED 模组供电。


由控制装置发出的 DALI 指令可用于在选定的时间启动功能和持续时间测试。设置状态标志用于报告反馈和结果记录。

Features 产品特点


- For maintained or non-maintained emergency lighting systems
- Automatic Self-Test technology conforming to EN 62034
- DALI conforming to EN 62386-101, EN 62386-102, EN 62386-202
- Conforms to EN 61347-1 and EN 61347-2-7
- Wired between driver and LED module via internal terminals or wire leads
- Suitable for use in luminaires for high-risk task area lighting
- Voltage change-over threshold according to EN 60598-2-22
- 3 hours rated duration
- Replaceable internal LiFePO4 battery pack
- Over-charge, over-current, short-circuit and deep discharge protection for battery
- Bi-coloured status LED indicator
- Function test and duration test
- For built-in
- Battery charging temperature control
- 用于持续式或非持续式应急照明灯具
- 自检功能符合标准EN 62034
- DALI符合标准EN 62386-101, EN 62386-102, EN 62386-202
- 符合EN61347-1, EN61347-2-7
- 通过端子或电线与电源及LED模组接线
- 适用于高风险任务区照明的灯具
- 应急转换符合标准 EN 60598-2-22
- 3小时应急工作时间
- 内置的且方便更换的磷酸铁锂电池组
- 具有过充,过流,短路,电池深度放电保护功能
- 双色状态指示灯
- 功能检测持续时间检测
- 内置式应用
- 电池充电温度控制

Dimensions 产品尺寸

Emergency Module 应急模块

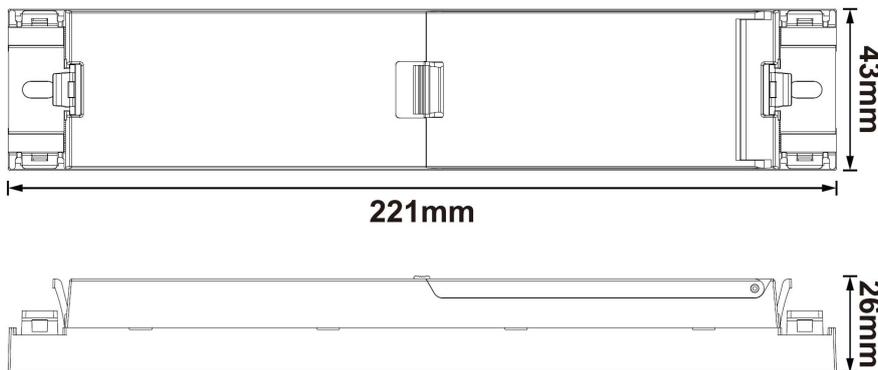


Input and Output Cable 输入输出电线

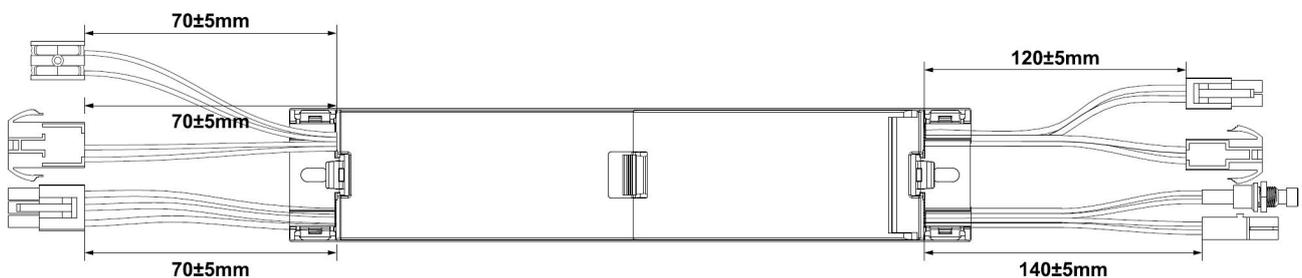


LED Indicator Cable

LED 指示灯电线



Indicator Holder

指示灯固定座

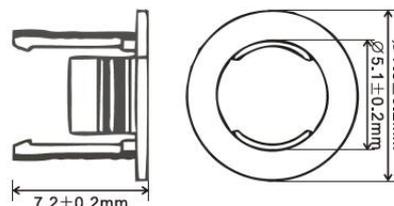

Product Code 产品型号	APRB03-30/DA
Product Description 产品描述	α Pro B,3W, 3hours emergency operation time, DALI-2 α Pro B,3W,3 小时应急工作时间, DALI-2 版
Input Parameters 输入参数	
Rated Input Voltage Range 额定工作电压范围	220-240Vac
Operation Input Voltage Range 输入电压范围	198-264Vac
Input frequency 工作频率	50/60Hz
Input Wattage (max) 输入功率 (最大值)	3.5W @Rated Input Voltage & Battery full discharge 3.5W @额定工作电压输入及电池完全放电后
Input Current (max) 输入电流 (最大值)	18mA @Rated Input Voltage & Battery full discharge 18mA @额定工作电压输入及电池完全放电后
Input PF 功率因数	PF:0.75 @Rated Input Voltage & Battery full discharge PF:0.75 @额定工作电压输入及电池完全放电后
Overvoltage Protection 过压保护	No
Input Connection 输入端连接方式	Wiring leads with connector 带端子电线
Output Parameters 输出参数	
Regulation Method 恒定方式	Constant Wattage 恒功率
Battery Output Wattage(max) 电池输出功率(最大值)	3W Max
Rated Output Wattage 额定输出功率	2.5W Max
Rated Output Voltage Range 额定输出电压范围	30-300Vdc
Rated Output Current Range 额定输出电流范围	8-80mA
Max. Open Circuit Voltage 最大开路电压	310Vdc
U-OUT	310Vdc
Short-circuit Protection 短路保护	Yes (For battery)
Open Circuit Protection 开路保护	Yes
Output Connection 输出端连接方式	Wiring leads with connector 带端子电线
Output Hot Plug-in 输出热拔插	When the driver is powered on and the battery is connected, reconnecting the LED luminaire is not allowed. 通电状态下, 不允许重新插拔负载

Safety 安全	
Input to Output Protection 输入到输出防护等级	Double Insulation 双重绝缘
Battery to Output Protection 电池到输出防护等级	Basic Insulation 基本绝缘
Mains Surge Capability 雷击	L-N:1KV
IP Protection IP 等级	IP20, Independent Driver IP20, 独立式电源
Emergency Information 应急信息	
Mains Voltage Changeover Threshold 应急转换电压范围	144-187Vac
Emergency Operation Time 应急工作时间	3h
Emergency Conversion Time 应急转换时间	<1s
Test Function 检测方式	Automatic Self-Test / Manual test 自测试/手动测试
Environment & Life time 环境&寿命	
Operating Temperature Range 工作环境温度	Ta:0 to 50°C
Maximum Case Temperature 外壳最高温度	Tc:75°C
Operating Humidity 工作环境湿度	<75% RH (Not Condensing)
Operating Altitude 工作海拔高度	≤3000m
Driver Storage temp./humidity 驱动储存温度/湿度	-20-50°C(≤75% RH)
Driver Guarantee 驱动保修期	5 Years 5 年
Certifications and Standards 认证和标准	
Certifications 认证	ENEC, CB, CE, SAA
Safety 安全	EN 61347-1, EN 61347-2-7
EMC	EN55015, EN61000-3-2, EN61000-3-3, EN61547
RoHS	Directive 2011/65/EU with amendment (EU) 2015/863
Reach	No.1907/ 2006(EC) SVCH 240

Battery Pack 电池组	
Battery Model 电池型号	2IFpR19/66 2.0Ah 6.4V
Cell Type 电芯规格	LiFePO4 18650 3.2V 2000mAh
Number of cells 电芯数量	2
Rated Battery Capacity 标称电池容量	2000mAh
Rated Battery Voltage 标称电池电压	6.4V
Battery Charge Voltage 电池充电电压	7.3±0.1V
Battery Charge Current 电池充电电流	Max.150mA
Battery Discharge Voltage 电池放电电压	5.0-7.2V
Battery Discharge Current 电池放电电流	450-480mA
Charging Time 充电时间	24h
Charge Temperature Range Tcmin-Tcmax 充电温度范围	0 to 65°C
Battery Design Life 电池设计寿命	5 Years at 50°C
Max. storage time 最长储存时间	12 months at +5 °C to +25 °C

Customizable Accessories 可定制配件

Type 类型	Description 描述
LED indicator & Test button cable 指示灯及测试按钮线	Bi-coloured status LED indicator and test button cable with 4-pole plug 带4位连接器的双色状态指示灯和测试按钮电线
Mains Supply Input Cable 市电输入线	2-pole wiring leads with connector for connecting to mains supply 2 芯电线, 含与市电输入端连接的端子
Cable to LED Driver Input LED 驱动输入线	2-pole wiring leads with connector for connecting to LED driver output 2 芯电线, 含与 LED 电源输入端连接的端子
Output Cable to LED Module 输出线	2-pole wiring leads with connector for connecting to LED module 2 芯电线, 含与 LED 模组连接的端子
Output Cable to LED Driver Output 输出线	2-pole wiring leads with connector for connecting to LED driver output 2 芯电线, 含与 LED 电源输出端连接的端子
DALI cable DALI 线	2-pole wiring leads with connector for connecting to DALI 2 芯电线, 含与 DALI 信号线连接的端子



印锐

CYANTRONIC

Wiring Diagram 接线图

Driver output current ≤ 2A 驱动输出电流 ≤ 2A

