

# 承認書

## SPECIFICATION FOR APPROVAL

|                     |                     |
|---------------------|---------------------|
| ● 客戶名稱              |                     |
| ● Customer          |                     |
| ● 客戶品號              |                     |
| ● Customer Part No. |                     |
| ● 產品品號              | HC-L2835WWDT-03V150 |
| ● Brightek Part No. |                     |
| ● 產品規格描述            | 2835暖白光高显指0.5W      |
| ● Specification     |                     |
| ● 製錶人               | 王清                  |
| ● Prepared By       |                     |
| ● 審核                | 李东平                 |
| ● Checkedy          |                     |
| ● 客戶回簽              |                     |
| ● Customer          |                     |
| ● 送樣日期:             |                     |
| ● Deliver date:     |                     |

說明：一、謹致執事者：茲提供敝公司產品之有關詳細規格及圖面資料，敬請給予辦理測試認定手續。同時敬請送返一份附有貴公司簽認之測試認定後之樣品認定書。

We are sending you our specification and drawings for your approval. Please return to us one copy "For Approval" with your approved signatures.

二、客戶意見欄 Customer's Proposal

☐ Approve 承認 (請於認可欄中簽名)

☐ Disagree 不同意

Reason 原因:

光宇集團 中高端光电元件定制企业，20多年封装经验，品质稳定，值得信赖，体现光的价值。

光宇集团国际（香港）有限公司

GTU Group International (HK) Co., Limited

广东光宇半导体科技有限公司

工厂地址：东莞市寮步镇松湖智谷A2栋3楼

东莞市弘呈光电有限公司

DongGuan Hong cheng Optoelectronics Co.,Ltd.

工厂地址：广东省东莞市樟木头镇莞樟路樟木头段15号15栋2108号

ADD:Room 2108,No.1 building, Wanhui Garden, East Guanzhang Road, Zhangmutou, Dongguan, Guangdong, China

TEL: 0769-87797616 87182291 Fax: 0769-82337396 [www.hc-led168.com](http://www.hc-led168.com)

业务联系人：李顺阳 13925714318 (微信同号) 销售总监 企业邮箱：[sales@led-hc.com](mailto:sales@led-hc.com)



| 版本/版次 | 修改日期 | 修改内容 |
|-------|------|------|
|       |      |      |
|       |      |      |
|       |      |      |
|       |      |      |

## 技术数据表 Technical Data Sheet

本产品主要作为信号指示及照明的电子元件,广泛应用于各类使用表面贴装结构的电子产品中,如家用照明,灯具,电器开关指示灯、手机键盘灯、汽车仪表盘照明,本产品也广泛用于各类室内外的装饰照明,监控,安防产品。

This product is mainly used as an electronic component for signal indication and lighting, and is widely used in various electronic products that use surface mount structures, such as household lighting, lamps, electrical switch indicators, mobile phone keyboard lights, automobile dashboard lighting, and this product is also widely used in various indoor and outdoor decorative lighting, monitoring and security products.


|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>特 性:</b><br><br><b>Features:</b> | <ul style="list-style-type: none"><li>● 管芯材料: InGaN<br/>Material: InGaN</li><li>● 封装材料: 环氧树脂<br/>Encapsulation: Resin</li><li>● 焊接方法: 无铅回流焊<br/>Soldering methods: Pb-Free reflow soldering</li><li>● 光强度高, 功耗低, 可靠性好, 寿命长<br/>High Luminous Intensity, Low Power Dissipation, good Reliability and Long Life</li><li>● 符合欧盟公布的 ROHS 指令要求<br/>Complied With ROHS Directive</li></ul> <div>发光颜色: 暖白<br/>Emitting Color: Warm white</div> |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

\*产品规格如因工艺改进而有所改变，恕不另行通知。

\*The Specifications of the product may be modified for improvement without notice.


## 外形尺寸

### Outline Dimension

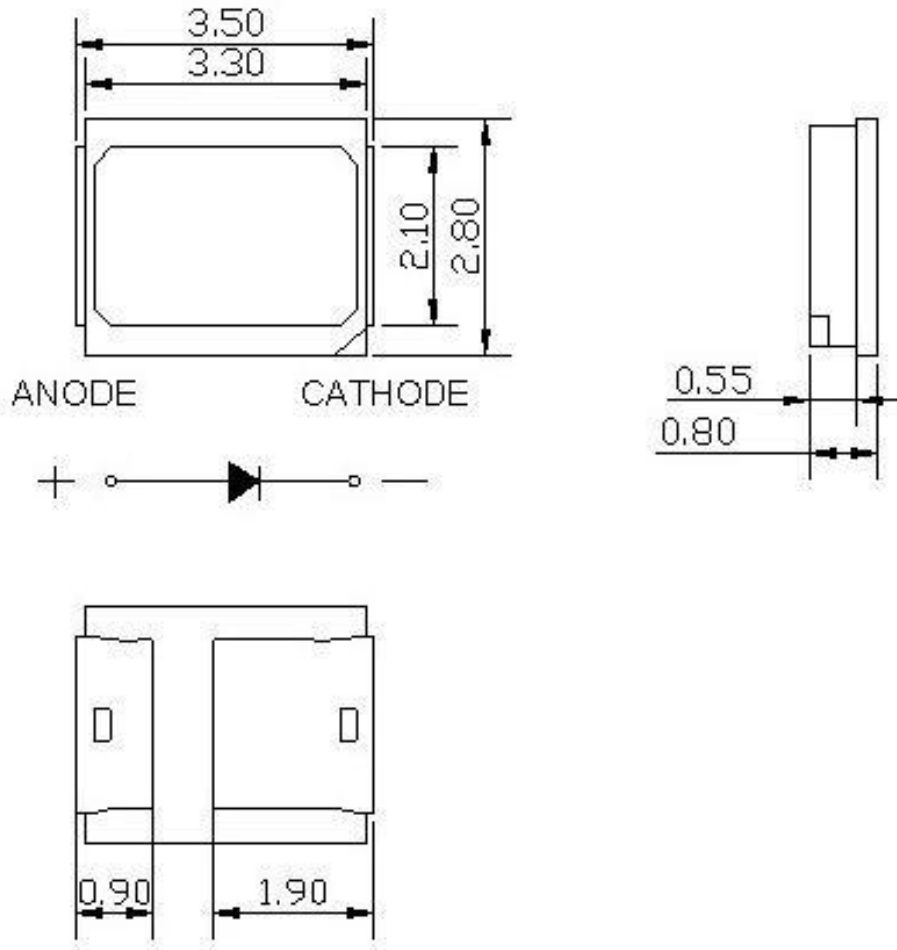

## 推荐焊盘尺寸

### Recommended Soldering Pad

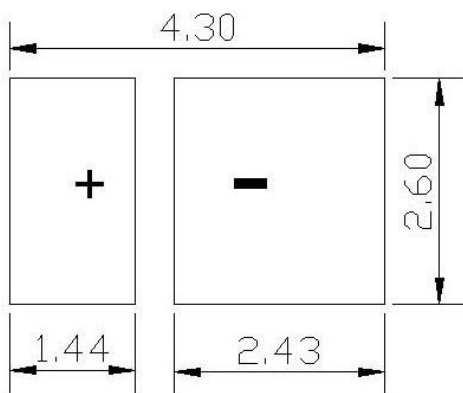

敷铜区域:

Cuprum Area:

阻焊丝印区域:

Solder Resist:

\*无特别规定时，公差为 $\pm 0.1\text{mm}$ ，单位为 $\text{mm}$ \*

\* The Tolerances Unless Mentioned is  $\pm 0.1\text{mm}$ , Unit=  $\text{mm}$ \*



## 电性参数

### Electrical Characteristics

#### 1、极限参数（温度=25℃）：

Absolute Maximum Ratings(Temperature=25℃)：

| 参数名称<br>Parameter                 | 符号<br>Symbol | 数值<br>Rating |     | 单位<br>Unit |
|-----------------------------------|--------------|--------------|-----|------------|
| 正向电流<br>Forward Current           | IF           | WW           | 150 | mA         |
| 正向脉冲电流*<br>Pulse Forward Current* | IFP          | WW           | 250 | mA         |
| 功耗<br>Power Dissipation           | Pd           | WW           | 460 | mW         |
| 反向电压<br>Reverse Voltage           | VR           | WW           | 5   | V          |
| 工作温度<br>Operating Temperature     | Topr         | -30℃ ~ + 85℃ |     | ℃          |
| 贮存温度<br>Storage Temperature       | Tstg         | -40℃ ~ + 90℃ |     | ℃          |

\*注：脉冲宽度≤0.1ms，占空比≤1/10

\* Note: Pulse width≤0.1ms, Duty≤1/10

#### 2、光电参数（温度=25℃）：

Electro-Optical Characteristics (Temperature=25℃)：

| 参数名称<br>Parameter                    | 符号<br>Symbol | 条 件<br>Condition | 颜色<br>Color | 最小值<br>Min.   | 典型值<br>Typ. | 最大值<br>Max. | 单位<br>Unit |
|--------------------------------------|--------------|------------------|-------------|---------------|-------------|-------------|------------|
| 光强<br>Luminous Intensity             | IV           | IF =150mA        | WW          | 40            | 50          | 55          | LM         |
| 色度坐标<br>Chromaticity coordinate      | XY           |                  | WW          | 0.4291/0.4146 |             |             | --         |
| 色温<br>Color temperature              | K            |                  | WW          | 2850          | 3000        | 3200        | --         |
| 半波宽度<br>Spectrum Radiation Bandwidth | Δλ           |                  | WW          | ---           | 20          | ---         | nm         |
| 正向电压<br>Forward Voltage              | VF           |                  | WW          | 2.8           | 3.1         | 3.4         | V          |
| 反向电流<br>Reverse Current              | IR           | VR=5V            | WW          | ---           | ---         | 5           | uA         |
| 视角<br>View Angle                     | 2θ1/2        | IF = 150mA       | WW          | ---           | 120         | ---         | deg        |
| 显色指数<br>Color rendering index        | Ra           | IF = 150mA       | WW          | 95            | 97          | 98          | --         |



## 典型特性曲线

### Typical Characteristics Curves

#### Wavelength Groups (*Dominant Wavelength $I_F=150\text{mA}$* )

| Wavelength Groups | Min(lm) | Max(lm) |
|-------------------|---------|---------|
| W1                | 40      | 45      |
| W2                | 45      | 50      |
| W3                | 50      | 55      |

#### Chromaticity Coordinate Groups ( $I_F=150\text{mA}$ )

| Group | x1     | y1     | x2     | y2     | x3     | y3     | x4     | y4     |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| YF3   | 0.4088 | 0.3953 | 0.4054 | 0.3964 | 0.4015 | 0.3981 | 0.4042 | 0.3998 |
| YF4   | 0.4074 | 0.3983 | 0.4015 | 0.3981 | 0.4076 | 0.3998 | 0.4095 | 0.3914 |
| YF5   | 0.4059 | 0.3949 | 0.4021 | 0.3948 | 0.4089 | 0.3965 | 0.4015 | 0.4081 |
| YF6   | 0.4067 | 0.3942 | 0.4089 | 0.3965 | 0.4057 | 0.3981 | 0.4076 | 0.4098 |
| YG3   | 0.4052 | 0.3946 | 0.4087 | 0.3931 | 0.4063 | 0.3948 | 0.4089 | 0.3965 |
| YG4   | 0.4021 | 0.3916 | 0.4063 | 0.3948 | 0.4038 | 0.3965 | 0.4057 | 0.4081 |
| YG5   | 0.4032 | 0.3985 | 0.4088 | 0.3983 | 0.4041 | 0.3998 | 0.4064 | 0.3911 |
| YG6   | 0.4164 | 0.3911 | 0.4041 | 0.3998 | 0.4094 | 0.3913 | 0.4095 | 0.3918 |

#### Group Name on Label


Example: W2 –YF5

| Brightness Group | Wavelength |
|------------------|------------|
| W2               | YF5        |


*Note: No packing unit / tape ever contains more than one group for each selection.*

### Relative Spectral Emission


$V(\lambda)$  = Standard eye response curve  $\Phi_{\text{rel}} = f(\lambda)$ ;  $T_A = 25^\circ\text{C}$ ;  $I_F = 150\text{mA}$

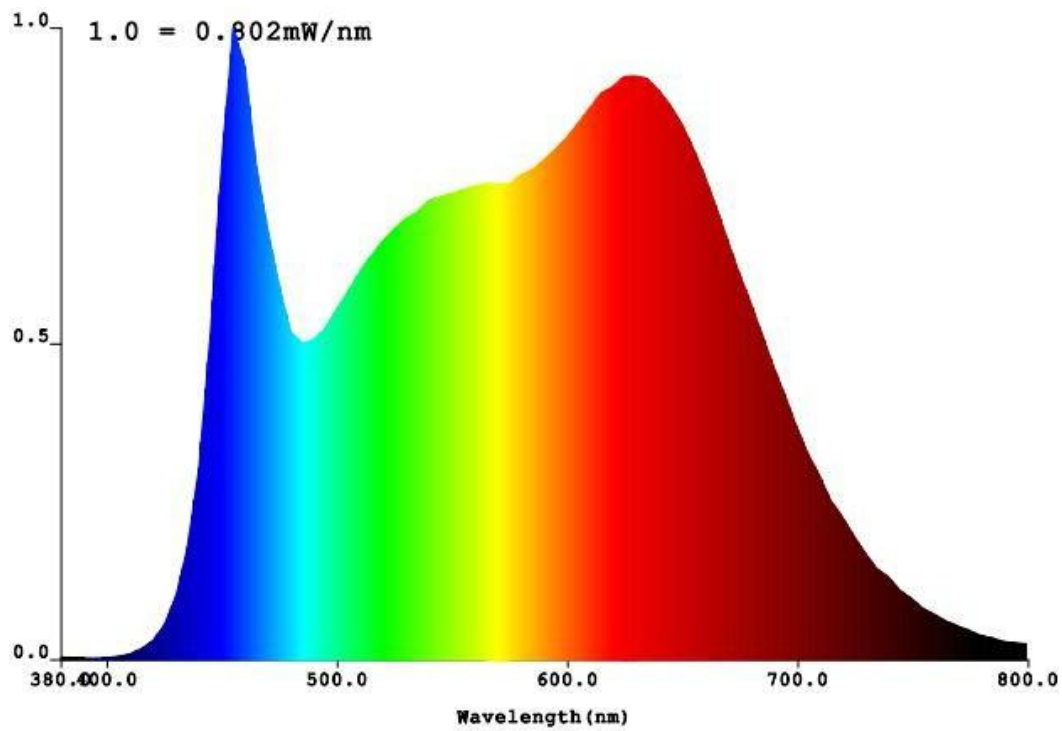


### Radiation Characteristic $\Phi_{\text{rel}} = f(\varphi)$ ; $T_A = 25^\circ\text{C}$

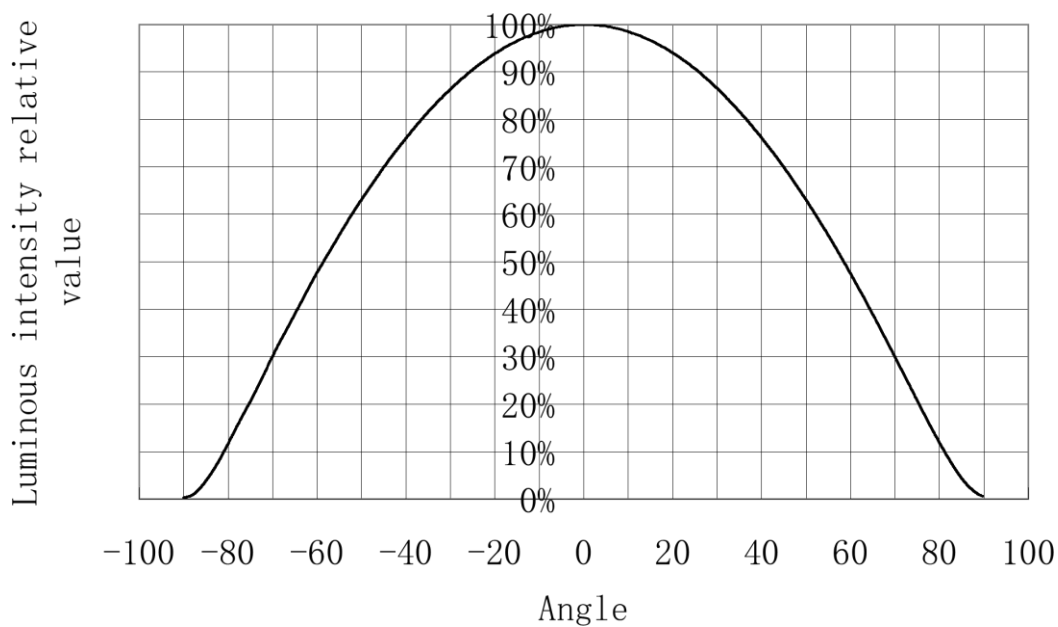


Forward Current VS Forward Voltage  
电流与电压关系曲线图

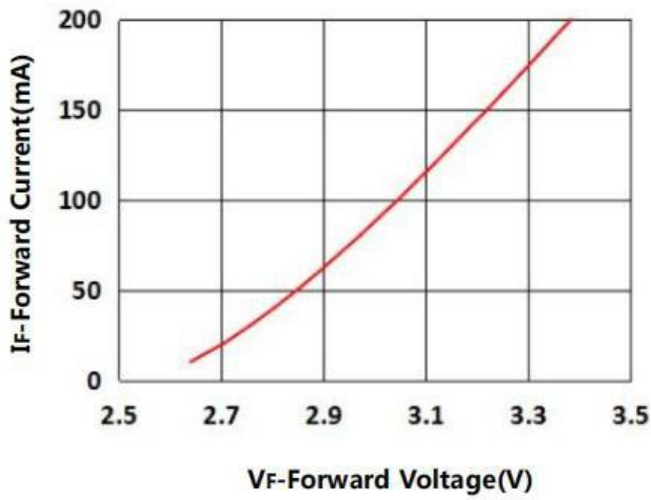


Relative Luminous Flux VS Forward Current  
亮度与电流关系曲线图

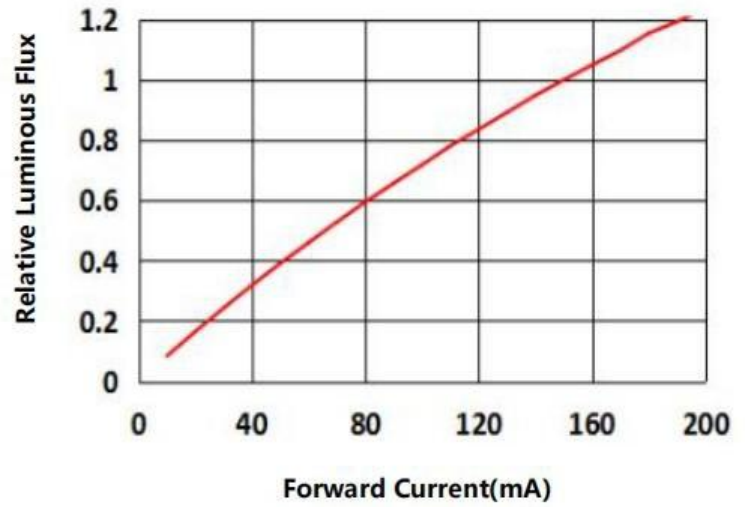

Relative Luminous Flux VS Junction Temperature  
亮度与结温关系曲线图

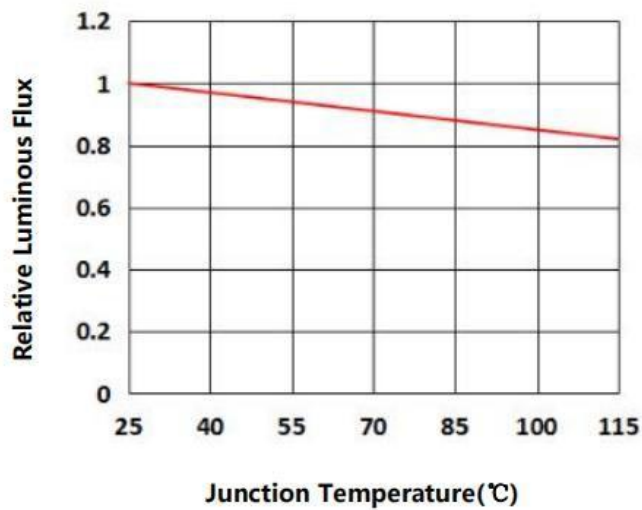

Forward Current VS Soldering Temperature  
电流与温度关系曲线图

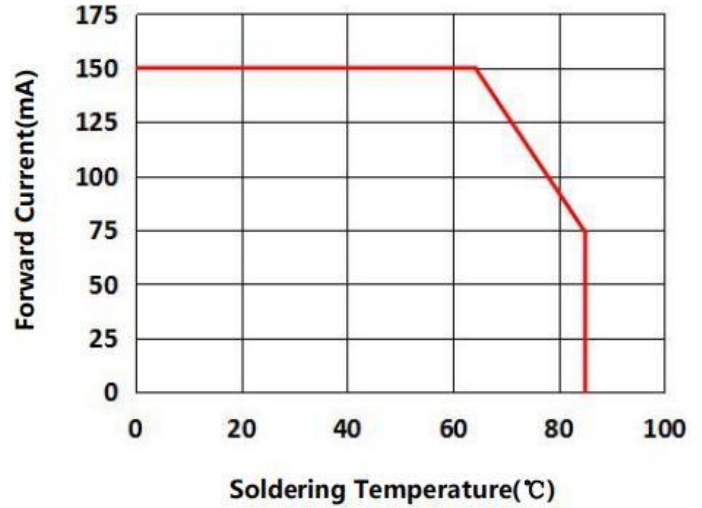

## 可靠性试验

### Reliability Test Items And Conditions

| 实验项目<br>Test Items                                  | 参考标准<br>Reference     | 实验条件<br>Test Conditions                     | 时间<br>Time             | 样品数<br>Quantity | 判据<br>Criterion |
|-----------------------------------------------------|-----------------------|---------------------------------------------|------------------------|-----------------|-----------------|
| 冷热冲击<br>Thermal Shock                               | MIL-STD-202G          | -40 °C (30min) ~<br>+100°C (30min)          | 循环 100 次<br>100 cycles | 22              | 0/22            |
| 湿热循环<br>Temperature And<br>Humidity Cyclic          | JEITA ED-4701 200 203 | -10 °C~+65°C, 0%<br>~90%,<br>24 hrs./1cycle | 循环 10 次<br>10 cycles   | 22              | 0/22            |
| 高温储存<br>High Temperature<br>Storage                 | JEITA ED-4701 200 201 | Ta=100°C                                    | 1000 hrs               | 22              | 0/22            |
| 低温储存<br>Low Temperature<br>Storage                  | JEITA ED-4701 200 202 | Ta=-35°C                                    | 1000 hrs               | 22              | 0/22            |
| 高温高湿储存<br>High Temperature High<br>Humidity Storage | JEITA ED-4701 100 103 | Ta=80°C<br>RH=90%                           | 1000 hrs               | 22              | 0/22            |
| 高温寿命<br>High Temperature Life<br>Test               | JESD22-A108D          | Ta=80°C<br>IF=150mA                         | 1000 hrs               | 22              | 0/22            |
| 常温寿命试验<br>Life Test                                 | JESD22-A108D          | Ta=25°C<br>IF=150mA                         | 1000 hrs               | 22              | 0/22            |
| 耐焊接热<br>Resistance to Soldering<br>Heat             | JEITA ED-4701 300 301 | 红外回流焊法<br>Reflow Soldering                  | 循环 2 次<br>3 times      | 22              | 0/22            |

### 失效判断标准 Criteria For Judging Damage


| 测试项目<br>Items                           | 符号<br>Symbol | 实验条件<br>Test Conditions | 失效判断标准 II<br>Criteria For Judging Damage II                                                                |
|-----------------------------------------|--------------|-------------------------|------------------------------------------------------------------------------------------------------------|
| 正向电压<br>Forward Voltage                 | VF           | IF=150mA                | $\geq$ USL                                                                                                 |
| 反向电流<br>Reverse Current                 | IR           | VR=5V                   | $\geq$ USL                                                                                                 |
| 光强<br>Luminous Intensity                | IV           | IF=150MA                | $\leq$ LSL                                                                                                 |
| 耐焊接热<br>Resistance to Soldering<br>Heat |              |                         | 材料无内部裂痕、无材料间爆裂、剥离、无死灯<br>Material without internal cracks, no<br>material between stripped, no dead light. |

USL:标准值上限值, LSL:标准值上限值。USL:Upper Standard Level, LSL:Lower Standard Level


包装 (1)

Packaging(1)

载带 Carrier Tape

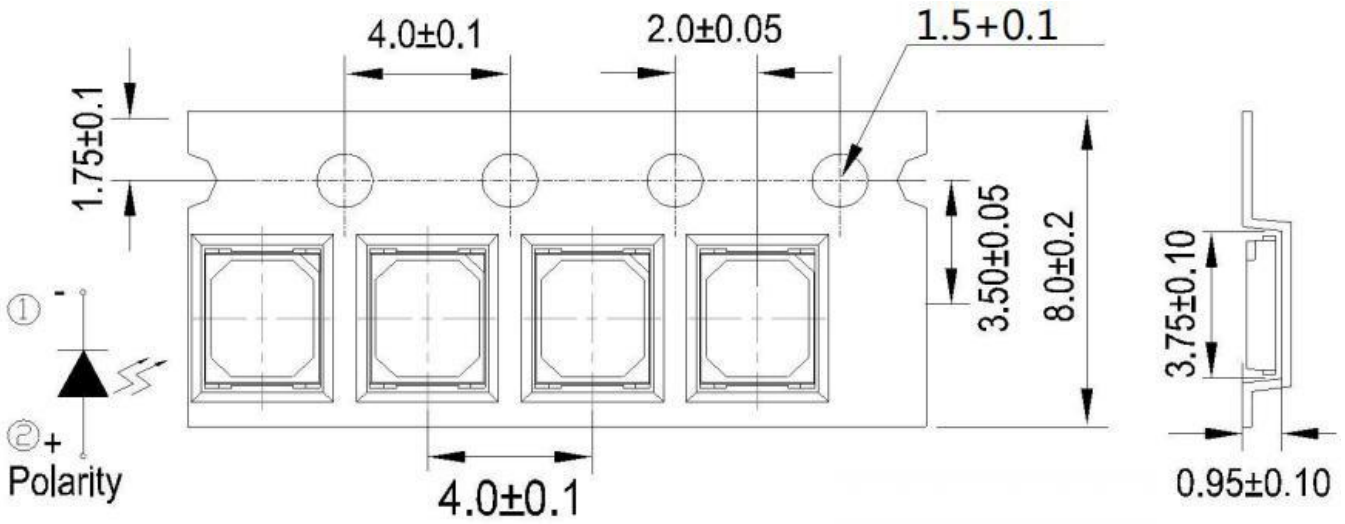


- Notes:
1. All dimensions are in millimeters ;
  2. Tolerance is  $\pm 0.1$  mm unless otherwise noted.

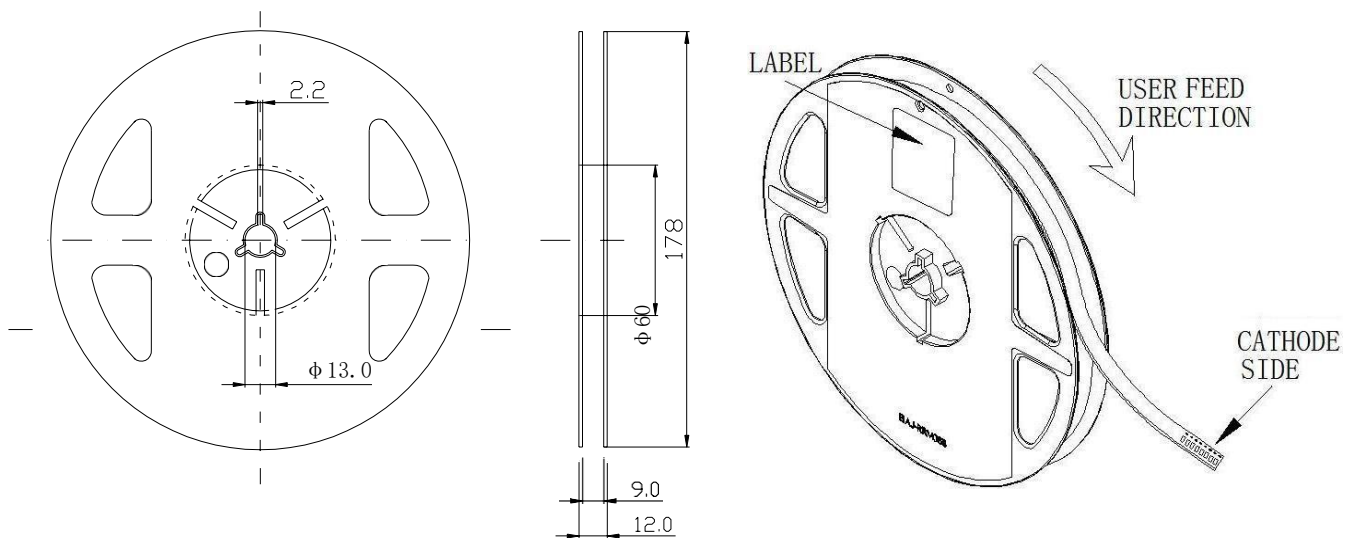

## 包装 (2)

### Packaging(2)

#### 防潮防静电包装 Moisture Proof and Anti-Electrostatic Foil Bag

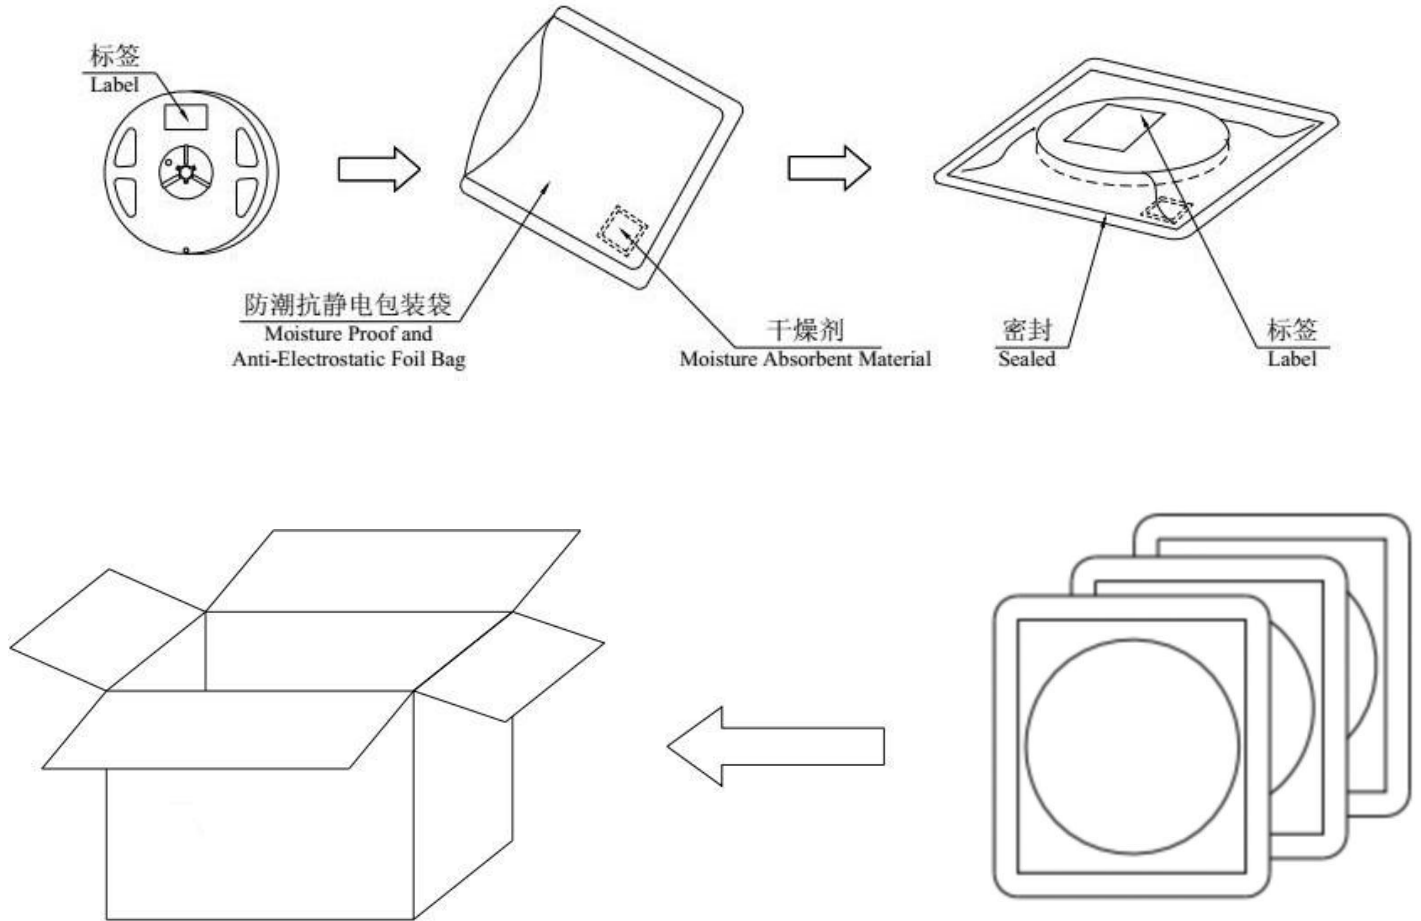

#### 标签说明 Label Explanation

Part No: MT- 产品型号

QTY: 数量 Quantity

LOT NO: 批号 Lot Number

IV: 光强范围 Wavelength Range

$\lambda$  d: 波长范围 Luminous Intensity Range

VF: 正向电压范围 Forward Voltage Range

IF: 以上数据测试电流 Testing Current

## 焊接指导 (1)

### Guideline for Soldering(1)

#### 1、使用烙铁人手焊接

##### Hand Soldering

推荐使用功率低于 20W 的烙铁, 焊接时烙铁的温度必须保持在 300℃ 以下, 且每个电极只能进行一次焊接, 每次焊接的持续时间不得超过 3 秒。


人手焊接过程中的不慎操作易引起 LED 产品的损坏, 应当小心谨慎。

A soldering iron of less than 20W is recommended to be used in Hand Soldering. Please keep the temperature of the soldering iron under 300℃ while soldering. Each terminal of the LED is to go for less than 3 second and for one time only.

Be careful because the damage of the product is often started at the time of the hand soldering.

#### 2、回流焊接: 推荐使用以下无铅回流焊温度图进行。

Reflow Soldering: Use the conditions shown in the under Figure of Pb-Free Reflow Soldering.

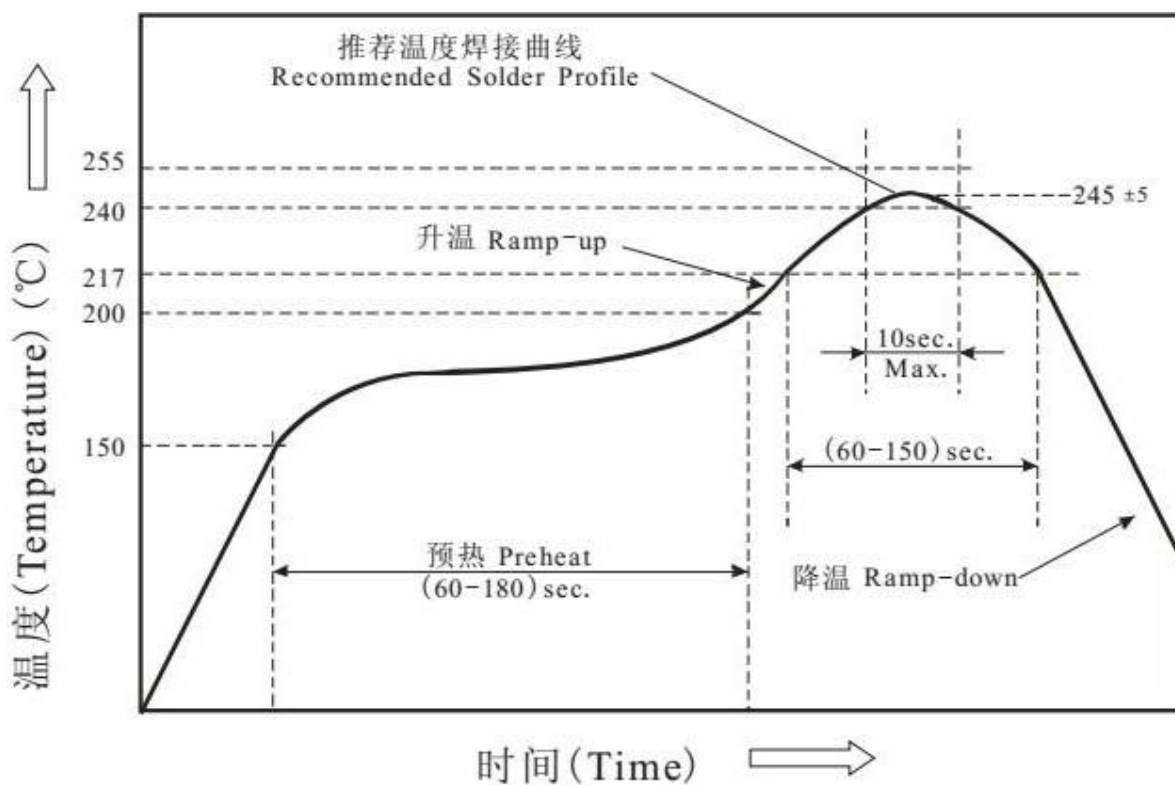

- 回流焊接只能进行一次、二次回流焊有损伤风险  
Reflow soldering can only be performed once. Risk of damage from secondary reflux.
- 在回流焊接升温过程中, 请不要对 LED 施加任何压力。  
Stress on the LEDs should be avoided during heating in soldering process.
- 在焊接完成后, 待产品温度下降到室温之后, 再进行其他处理。  
After soldering, do not deal with the product before its temperature drop down to room temperature.



## 焊接指导 (2)

### Guideline for Soldering

#### 3. 清洗:

##### Cleaning

在焊接后推荐使用酒精进行清洗, 在温度不高于 30℃的条件下持续 3 分钟, 不高于 50℃的条件下持续 30 秒。使用其他类似溶剂清洗前, 请先确定使用的溶剂不会对 LED 的封装和环氧树脂部分造成损伤。

超声波清洗也是有效的方法, 一般最大功率不应超过 300W, 否则可能对 LED 造成损伤。请根据具体的情况预先测试清洗条件是否会对 LED 造成损伤。

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30℃ for 3, minutes or 50℃ for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be higher than 300W. Before cleaning, a pre-test should be done to confirm whether any damage to LED s will occur.

\* 注意:此一般指导原则并不适用于所有 PCB 设计和焊接设备的配置。具体工艺受到诸多因素的影响, 请根据特定的 PCB 设计和焊接设备来确定焊接方案。

\* Note:This general guideline may not apply to all PCB designs and configurations of all soldering equipment. The technique in practice in practice is influenced by many factors, it should be specialized base on the PCB designs and configurations of the soldering equipment..



## 使用注意事项 (13)

### 1. 贮存:

#### Storage

本产品使用密封防潮抗静电袋包装，并附有干燥剂，未开封的产品有一年的保存时间。

Moisture proof and anti-electrostatic package with moisture absorbent absorbent material is used ,to keep moisture yo a minimum.

开封前，产品须存放在温度不高于 30℃，湿度不高于 60%RH 的环境中。

Before opening the package, the product should be kept at 30℃ or less and humidity less than 60% RH , and be used within a year.

开封后，产品须存放在温度不高于 30℃，湿度不高于 10%RH 的环境中，且应该在 168 小时（7 天）内使用完。建议工作环境为温度不高于 30℃，湿度不高于 60%RH 。

After opening the package, the product should be stored at 30℃ or less and humidity less than 10% RH, and be soldered within 168 hours (7 days). It is recommended that the product be operated at the workshop condition of 30℃ or less and humidity less than 60%RH.

对于尚未焊接的 LED，如果吸湿剂或包装失效，或者产品没有符合以上有效存储条件，烘焙可以起到一定的性能恢复效果。烘焙条件：(60±5)℃，持续 24 小时。

If the moisture absorbent material has fade away or the LED s have exceeded the storage time, treatment should be performed based on the following condition:(60±5)℃ for 24 hours.

## 使用注意事项 (14)

### 2、设计建议:


#### Design Consideration

设计电路时，通过 LED 的电流不能超过规定的最大值，同时，还需要使用保护电阻，否则，微小的电压变化将会引起较大的电流变化，可能导致产品损毁。

建议使用以下 (A) 电路，该电路能够很好的调节通过每个 LED 的电流：不推荐使用 (B) 电路，该电路在持续的电压驱动下，LED 的正向电压 (VF) 发生变化，电流会随之而发生变化，可能使某些 LED 承受不高于规定的电流值。

In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LED s with a constant voltage in Circuit B, the current through the LED s may vary due to the variation in Forward Voltage (VF) of the LED s In the worst case, some LED may be subjected to stresses in excess of the Absolute Maximum Rating.

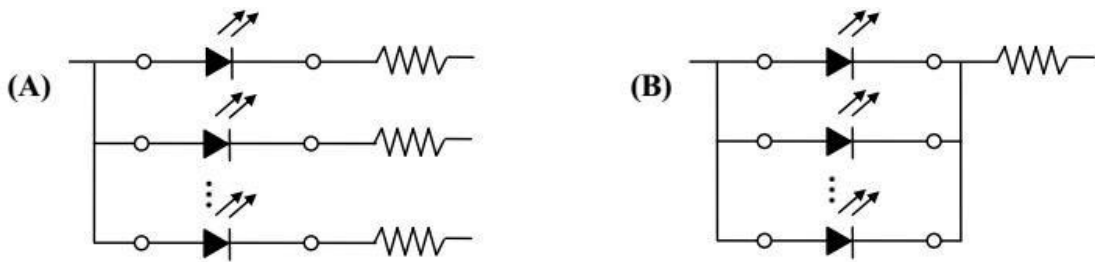

LED 的特性容易因为自身的发热和环境的温度的改变而发生改变。温度的升高会降低 LED 的发光效率、影响发光颜色等，所以在设计时应充分考虑散热的问题。

Thermal Design is paramount importance because heat generation may result in the Characteristics decline, such as brightness decreased, Color changed and so on. Please consider the heat generation of the LED s when making the system design.


## 使用注意事项 (15)

### 3. 其他事项:

#### Others

直接用手拿取产品不但会污染封装树脂表面,也可能由于静电等因素导致产品性能改变。过度的压力也可能直接影响封装内部的管芯和金线,因此请勿对产品施加过度压力,特别当产品处于高温状态下,例如在回流焊接过中。

When handling the product, touching the encapsulant will not only contaminate its surface, but also affect on its optical. Excessive force to the encapsulant might result in catastrophic failure of the LED s due to die breakage or wire deformation. For this reason, please do not put excessive stress on LED s, especially when the LED s are heated such as during Reflow Soldering.

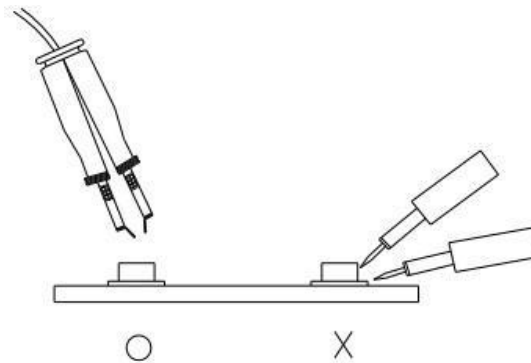

LED 的环氧树脂封装部分相当脆弱,请勿用坚硬、尖锐的物体刮、擦封装树脂部分。在用镊子夹取的时候也应当小心注意。

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

### 4. 眼睛保护忠告:

#### Safety Advice For Human Eyes

LED 发光时,请勿直视发光光源,特别是对于一些光强较高的 LED,强光可能伤害你的眼睛。

Viewing direct to the light emitting center of the LED s, especially those of great Luminous Intensity will cause great hazard to human eyes. Please be careful.