

产品性能



SRC05-ST



SRC08-ST



型号			SRC05-ST	SRC08-ST
额定负载	电流	A	16	10
	电压	V	300	
介质耐压	线圈/触点	V/min	4000	
	触点间	V/min	2500	
螺钉扭矩	Nm		-	
外连接导线	AWG/mm ²		20-14/0.5-2.5	
使用环境	°C		-40~+85	
重量	g		37	42


配件附件表

产品型号	标记牌	模块	连接桥
SRC05-ST	SR2P	AMD	ST01CC
SRC08-ST			

继电器板扣选配表


继电器高度(mm)	15	20	25
扳扣型号	SR15L	SR20F	SR25C

外形尺寸、安装尺寸 (mm)

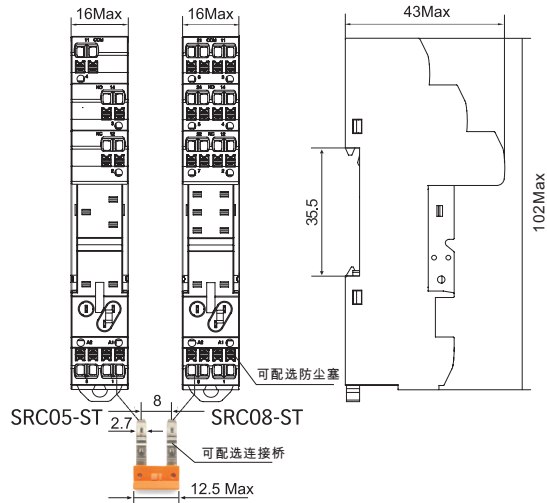


端子配置及接线图

- ① ⑤ : A1 A2
- ② : NC
- ③ : NO
- ④ : COM



SRC05-ST



SRC08-ST

- ① ⑧ : A1 A2
- ② ⑦ : NC
- ④ ⑤ : NO
- ③ ⑥ : COM