

产品性能



SKF08-E






SKF14-E




型号		SKF08-E	SKF14-E
额定负载	电流	A	12
	电压	V	300
介质耐压	V/min	2500	
螺钉扭矩	Nm	1	
外连接导线	AWG/mm ²	20-14/0.5-2.5	
使用环境	°C	-40~+85	
重量		g	35
			45

配用附件表

产品型号	金属卡簧	标记牌	模块
SKF08-E			
SKF14-E	 SK36M	 SK2P	 AMD


外形尺寸、安装尺寸 (mm)

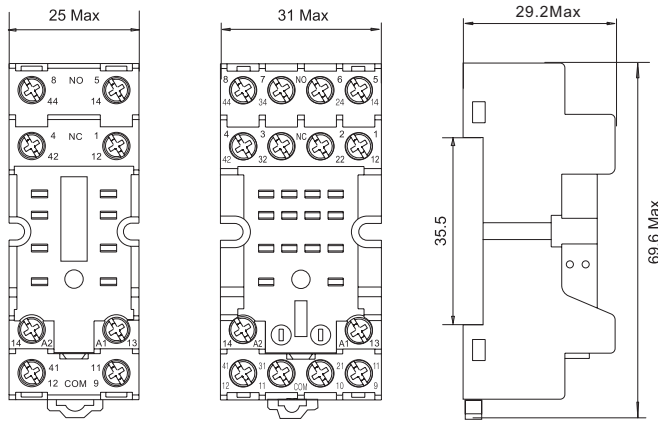

SKF08-E


SKF14-E

端子配置及接线图



SKF08-E

- ⑬ ⑭ : A1 A2
- ① ④ : NC
- ⑤ ⑧ : NO
- ⑨ ⑫ : COM



SKF14-E

- ⑬ ⑭ : A1 A2
- ① ② ③ ④ : NC
- ⑤ ⑥ ⑦ ⑧ : NO
- ⑨ ⑩ ⑪ ⑫ : COM