

# EnzoPar 19 Quad

EnzoPar 19 Quad is a compact, lightweight, durable, and elegant design all-weather par light, carrying RGBL/RGBW LED that delivers extreme high-output, flicker-free color with smooth 24-bit dimming.

Perfect for a wide range of applications from live events and broadcast to theatrical productions, this fixture excels in any indoor or outdoor environment where a compact, high-performance color wash is required.

Light Source  
**19x10W RGBL**

Illuminance  
**3087Lux@5m**

Beam Angle  
**11.2°**

Weight  
**4.5kgs**

Protection Rated  
**IP66**



## LIGHT SOURCE

Light Source  
19x10W RGBL LEDs (optional RGBW)

CRI  
83@3200K

Lux  
3087Lux@5meter

Color Temperature (range)  
1800K-10000K

Source Life Expectancy  
50,000 Hours

## OPTICS

Beam Angle  
11.2° (optional 25°, 45°)

Field Angle  
17.9°

## DYNAMIC EFFECTS

Dimming  
24-bit, extremely smooth electronic dimming

Dimmer Modes  
4 selectable dimming modes available

Dimming Curve  
4 selectable dimming curves available

Strobe/Shutter  
Electronic

Strobe Rate  
0 - 30 Hz

Color Temperature Presets  
Yes

## CONTROL

Control Protocol  
DMX,RDM

DMX Channels  
1/3/6/7/12/12/17/8/8ch

Firmware Upgrade  
Built-in program copying function, DMX, USB-C

## CONNECTIONS

Power Connection  
Seetronic powerCON TRUE In/Out IP65

Signal Connection  
Seetronic 3/5-pin XLR In/Out IP65

Firmware connection  
USB-C

## ELECTRICAL

Input Voltage  
90-240VAC 50/60Hz

Max power consumption  
160W

Power and Current  
163 W, 1.48 A @ 110 V, 60 Hz

Power and Current  
161 W, 1.46 A @ 110 V, 50 Hz  
161 W, 0.70 A @ 230 V, 60 Hz  
160 W, 0.69 A @ 230 V, 50 Hz

Power Linking  
10units @ 110 V; 22units @ 230 V

## PHYSICAL

Housing Material  
Die-cast magnesium aluminum,black

Cooling  
Convection,overheating protection

Temperature (Ambient)  
4 °F to 113 °F (-20 °C to +45 °C)

Dimensions  
239x185x292 mm

Weight  
4.5kgs


IP rating  
IP66

## CERTIFICATIONS

Certifications  
CE, RoHS

## OPTIONAL ACCESSORIES

DMX Cable IP  
OMEGA  
Accessory holder  
Barndoor  
Tophut  
Diffuser(15°x1°,30°,50°,60°)



Barndoor



Tophut




Accessory holder



Diffuser

## DIMENSION

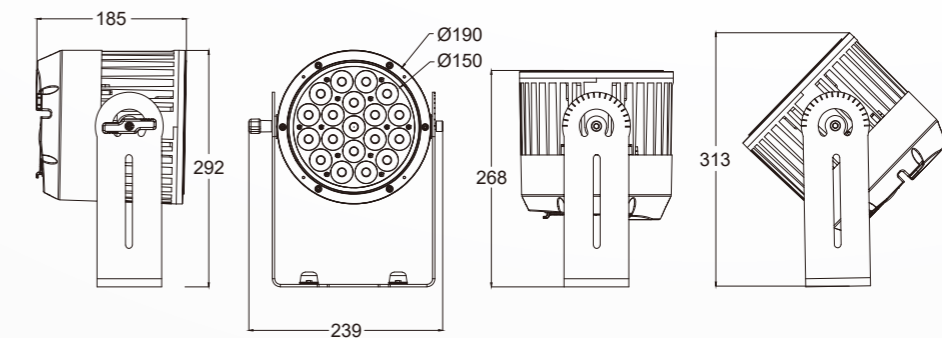

## PHOTOMETRIC

