


Premline Linear Light

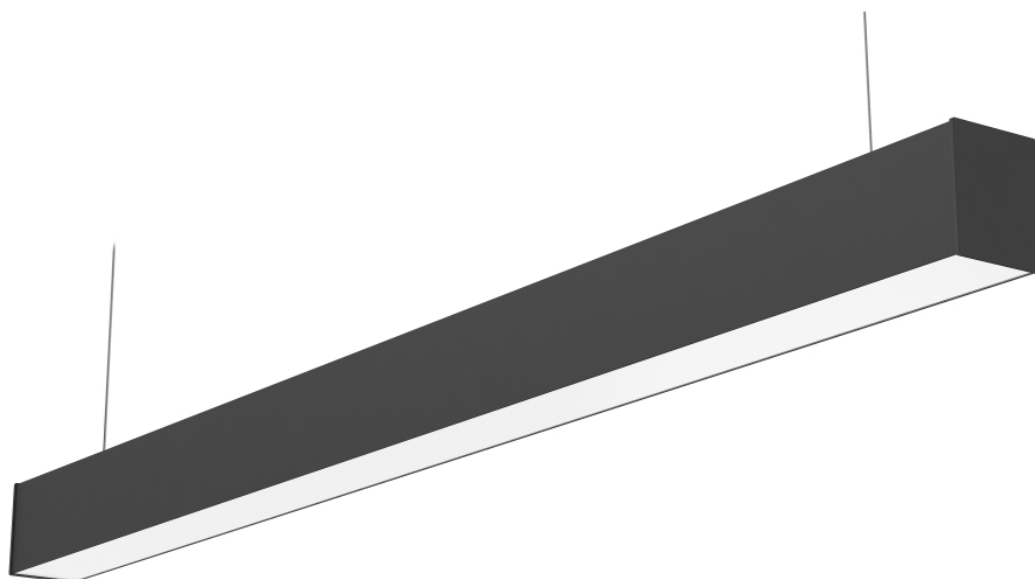

Product Description:

This compact and high-performing Premline brings eye-pleasing illumination to architectural and commercial interiors. Designed to be surface mounted, suspended or recessed, and featured with light weight and easy installation, this linear light lends a clean aesthetic to offices, retail spaces, supermarkets, stairwells and other applications which require high quality lighting and price- effective. The Premline can be quickly and easily linked together to create runs of light that appear seamless.

Product Features:

- High efficiency up to 130lm/w
- Anti-glare with micro-prismatic optics UGR<19
- Modular design Indirect light, flexible for stock
- Aesthetic compact design, end cap without screw
- Seamless Linkable version available: maximum 1000W for one lead recommended
- Fast and easy linear installation thanks to patent designed lockable connector
- Pendant, Surface mounted and recessed installation available
- HCL intelligent control with Casambi , Presence and Daylight harvesting Sensor and Emergency kit optional


Product Application:

- Office & Education: offices, open-plan offices, staff training facilities, conference rooms,libraries, classrooms
- Retail & Hospitality: checkout areas, shopping malls

Product Parameters:


SPECIFICATION	1.2M	1.5M	3.0M
Power Consumption	25W/31W	31W/38W	62W/77W
Lumens Delivered	3200lm/ 4000lm(1600lm↑+2400lm↓)	4000lm/ 5000lm(2000lm↑+3000lm↓)	8000lm/ 10000lm(4000lm↑+6000lm↓)
Efficiency	130 lm/W		
Color Temperature	3000K / 4000K/ 3000K-6500K(Turnable White)		
CRI	≥80 (Ra90 Available)		
SDCM	≤3		
Lumen Maintenance	L80≥50,000hrs @ Ta=25°C		
Input Voltage	200-240V/AC 50/60Hz		
Power Factor	> 0.9		
THD	< 15%		
Dimming	DALI Dimmable		
Beam Angle	Direct: 80°↓ / Indirect: 130°↑		
Material	Housing: AL, Diffuser: PC		
Finish Color	Matt White(RAL9016) / Matt Black(RAL9005)		
IP Protection	IP20		
IK Protection	IK02		
Certificate	CE, SAA, ENEC		
Warranty	5 Years		

Product Dimension:




Dimension			
PRODUCT	L(mm)	W(mm)	H(mm)
PLF1-D/I 120	1206	65	85
PLF1-D/I 150	1506	65	85
PLF1-D/I 300	3006	65	85

Photometric Diagram:



Direct light



Indirect/direct light

Product Packing:

Individual version packaging information

Length	QTY/CTN	Carton Size	N.W.	G.W.
1.2m	4 PCS	144x20x27.5cm	13.2kg	15.3kg
1.5m	4 PCS	174x20x27.5cm	16kg	18.1kg
3.0m	2 PCS	325x22x13.5cm	16kg	18.1kg

Continuous version packaging information

Length	QTY/CTN	Carton Size	N.W.	G.W.
1.2m	4 PCS	144x20x27.5cm	15.2kg	17.3kg
1.5m	4 PCS	174x20x27.5cm	18kg	20.1kg
3.0m	2 PCS	325x22x13.5cm	18kg	20.1kg