


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 36.73 lm/W			
MODEL		I _{max} (cd)	859.6	S/MH(C0/180)	1.06
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.06
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1480.4	η UP, DN(C0-180)	0.0,50.6
NOMINAL FLUX(lm)	1480.36	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.10

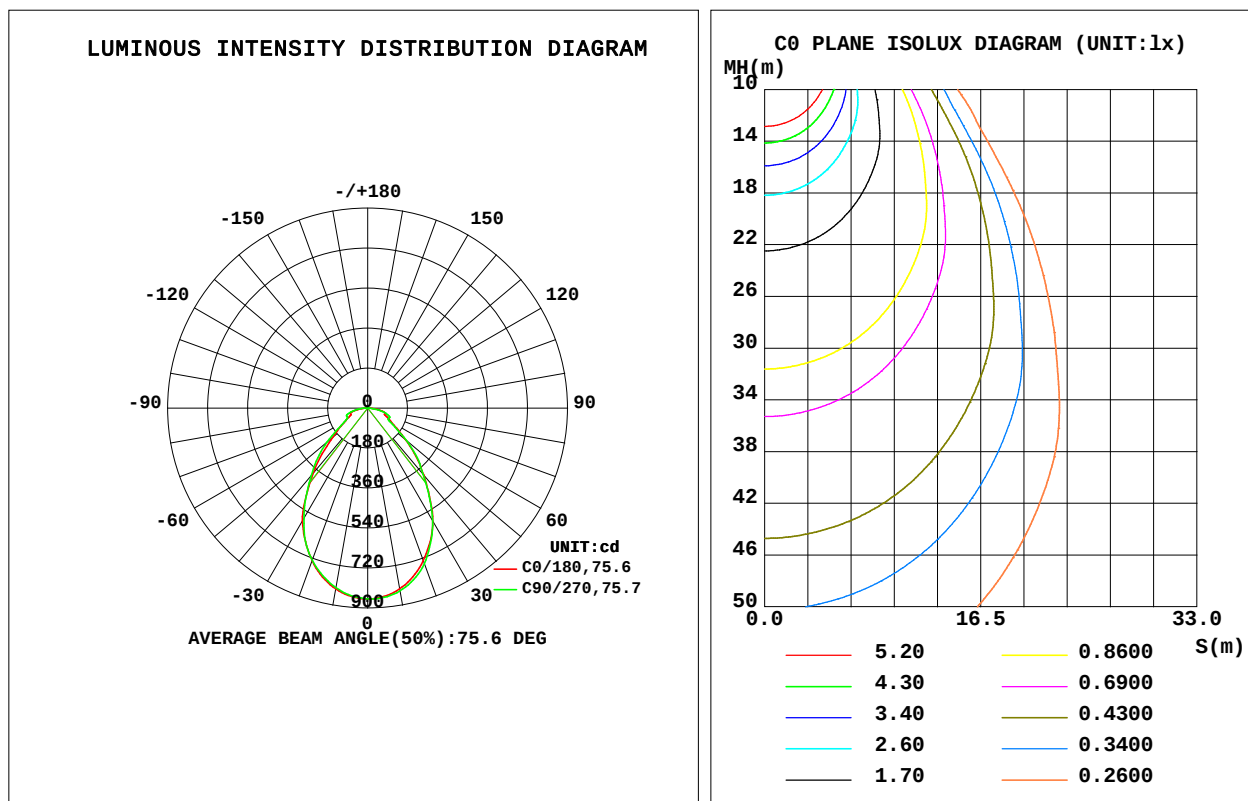

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity: 65.0%
Test Distance: 9.526m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
10	827.5	825.5	821.5	823.0	826.7	830.6	836.0	831.2	0- 10	80.51	80.51	5.44, 5.44
20	731.5	730.9	729.4	727.9	731.6	731.9	745.8	734.8	10- 20	221.2	301.7	20.4, 20.4
30	587.9	586.3	575.4	590.6	587.5	571.3	586.3	573.0	20- 30	304.1	605.8	40.9, 40.9
40	382.6	385.0	395.1	383.2	392.2	359.3	389.5	368.0	30- 40	300.8	906.6	61.2, 61.2
50	206.1	254.8	240.9	263.4	225.3	237.5	228.4	238.1	40- 50	238.1	1145	77.3, 77.3
60	116.3	122.2	117.7	126.7	120.8	109.5	108.5	111.9	50- 60	154.0	1299	87.7, 87.7
70	82.19	54.26	101.9	58.40	80.76	55.32	101.6	55.67	60- 70	87.91	1387	93.7, 93.7
80	52.54	57.20	59.09	51.02	54.66	41.07	45.60	45.61	70- 80	70.16	1457	98.4, 98.4
90	1.786	2.934	2.424	1.856	0.6784	1.026	0.7422	1.629	80- 90	23.63	1480	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1034.1 lm

%lum = 69.9%

%lamp = 69.9%

Conical surface Flux(120deg): 1298.7 lm

%lum = 87.7%


%lamp = 87.7%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
 Humidity: 65.0%
 Test Distance: 9.526m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

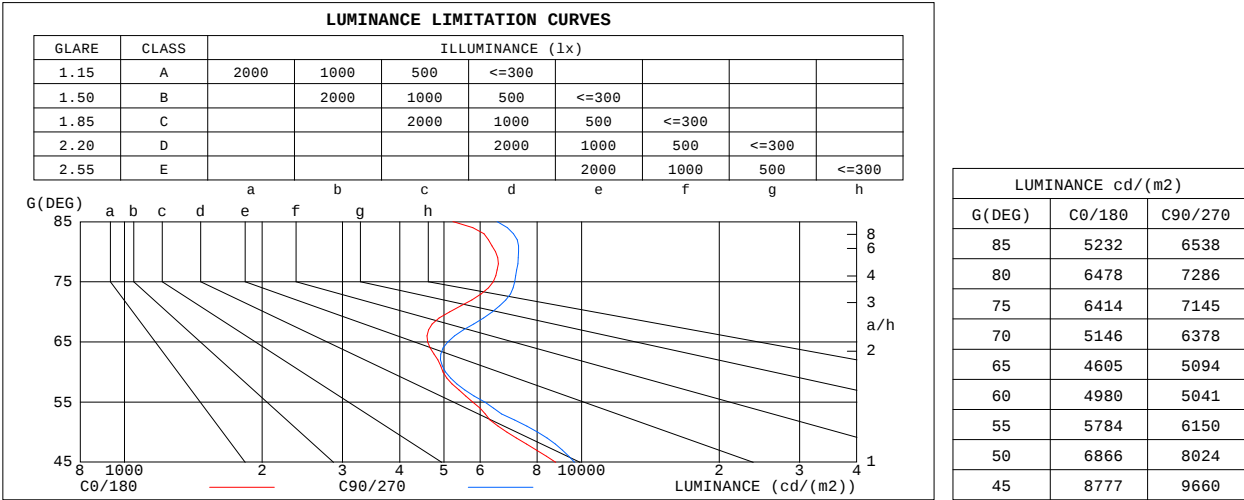


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity:65.0%
Test Distance:9.526m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.92	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.84	.80	.78	.76
3.0	.85	.78	.73	.84	.77	.72	.81	.75	.71	.78	.74	.70	.76	.72	.68	.66
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.62	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.62	.56	.67	.61	.56	.65	.60	.55	.64	.59	.55	.53
6.0	.64	.56	.51	.63	.56	.50	.62	.55	.50	.60	.54	.50	.59	.53	.49	.47
7.0	.59	.51	.46	.58	.51	.46	.57	.50	.45	.55	.49	.45	.54	.49	.45	.43
8.0	.55	.47	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.50	.45	.41	.39
9.0	.51	.43	.38	.50	.43	.38	.49	.42	.38	.48	.42	.38	.47	.41	.37	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.35	.33

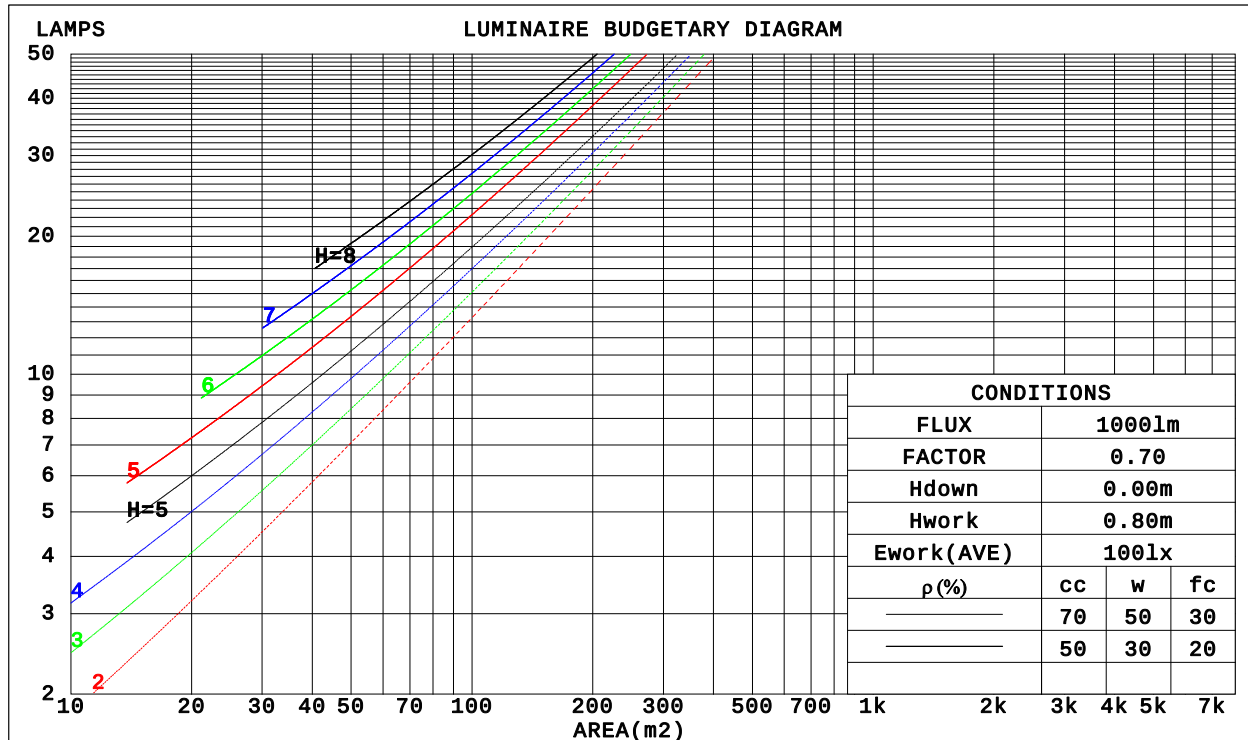

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.295T
 Humidity: 65.0%
 Test Distance: 9.526m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm					
NAME: LAFA壁灯 下 3000K			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.265	.151	.048	.258	.147	.047	.245	.140	.045	.233	.134	.043	.222	.129	.041		
2.0	.249	.136	.042	.243	.134	.041	.231	.129	.040	.221	.124	.039	.211	.120	.038		
3.0	.232	.123	.037	.226	.121	.037	.217	.117	.036	.207	.114	.035	.199	.110	.034		
4.0	.216	.112	.033	.211	.111	.033	.203	.107	.032	.194	.104	.031	.187	.102	.031		
5.0	.201	.103	.030	.197	.101	.030	.190	.099	.029	.183	.096	.029	.176	.094	.028		
6.0	.189	.095	.027	.185	.093	.027	.178	.091	.027	.172	.089	.026	.166	.087	.026		
7.0	.177	.088	.025	.174	.087	.025	.168	.085	.024	.162	.083	.024	.157	.081	.024		
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022		
9.0	.157	.076	.021	.155	.075	.021	.150	.074	.021	.145	.073	.021	.141	.072	.021		
10.0	.149	.071	.020	.147	.071	.020	.142	.070	.020	.138	.069	.019	.134	.067	.019		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.152	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.167	.132	.103	.143	.114	.089	.098	.079	.062	.056	.046	.036	.018	.015	.012	
3.0	.157	.114	.080	.135	.098	.069	.092	.068	.048	.053	.040	.029	.017	.013	.009	
4.0	.149	.100	.063	.128	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
5.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
6.0	.134	.081	.043	.115	.070	.037	.079	.049	.026	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.109	.064	.032	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.115	.063	.027	.099	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.110	.058	.024	.095	.051	.021	.066	.036	.015	.038	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295T
 Humidity:65.0%
 Test Distance:9.526m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm											
NAME: LAFA壁灯 下 3000K					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.2	19.5	18.4	19.7	19.9	18.4	19.7	18.6	19.9	20.1	
	3H	19.1	20.3	19.3	20.5	20.7	19.5	20.7	19.8	21.0	21.2
	4H	19.9	21.0	20.2	21.3	21.5	20.4	21.6	20.7	21.8	22.1
	6H	20.7	21.8	21.0	22.1	22.3	21.3	22.4	21.6	22.6	22.9
	8H	21.0	22.1	21.3	22.3	22.6	21.6	22.6	21.9	22.9	23.2
	12H	21.2	22.2	21.5	22.5	22.8	21.8	22.8	22.1	23.1	23.4
4H	2H	18.4	19.5	18.7	19.8	20.0	18.6	19.7	18.9	20.0	20.2
	3H	19.5	20.5	19.8	20.8	21.1	19.9	20.9	20.3	21.2	21.5
	4H	20.6	21.5	20.9	21.8	22.1	21.1	22.0	21.4	22.3	22.6
	6H	21.7	22.5	22.1	22.8	23.2	22.2	23.0	22.6	23.4	23.7
	8H	22.1	22.8	22.5	23.2	23.6	22.6	23.4	23.0	23.8	24.1
	12H	22.3	23.0	22.7	23.4	23.8	22.9	23.6	23.3	24.0	24.4
8H	4H	21.0	21.7	21.4	22.1	22.5	21.4	22.2	21.8	22.5	22.9
	6H	22.3	22.9	22.7	23.3	23.8	22.8	23.4	23.2	23.8	24.2
	8H	22.8	23.4	23.3	23.8	24.3	23.3	23.9	23.8	24.3	24.7
	12H	23.2	23.7	23.7	24.1	24.6	23.7	24.2	24.2	24.6	25.1
12H	4H	21.0	21.7	21.5	22.1	22.5	21.5	22.2	21.9	22.5	22.9
	6H	22.5	23.0	22.9	23.5	23.9	22.9	23.4	23.3	23.9	24.3
	8H	23.1	23.5	23.5	24.0	24.5	23.5	24.0	24.0	24.4	24.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.1					
2.0H	+ 0.5 / - 0.4					+ 0.6 / - 0.5					

CIE Pub.117 Corrected 1480 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.295T
 Humidity:65.0%
 Test Distance:9.526m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	69	58	51	68	57	50	65	56	50	43
0.80	78	67	59	76	66	59	73	64	58	51
1.00	85	74	67	83	73	67	80	71	65	58
1.25	91	81	74	89	80	74	85	78	72	64
1.50	95	86	80	93	85	79	89	82	77	69
2.00	101	94	88	99	92	87	95	89	85	76
2.50	104	98	93	102	96	91	97	93	89	80
3.00	106	101	96	104	99	95	99	95	92	83
4.00	109	105	101	107	103	99	102	99	96	86
5.00	111	107	104	109	105	102	104	101	99	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Ceiling Mounted					SHRNOM = 1.00		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
 Humidity:65.0%
 Test Distance:9.526m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

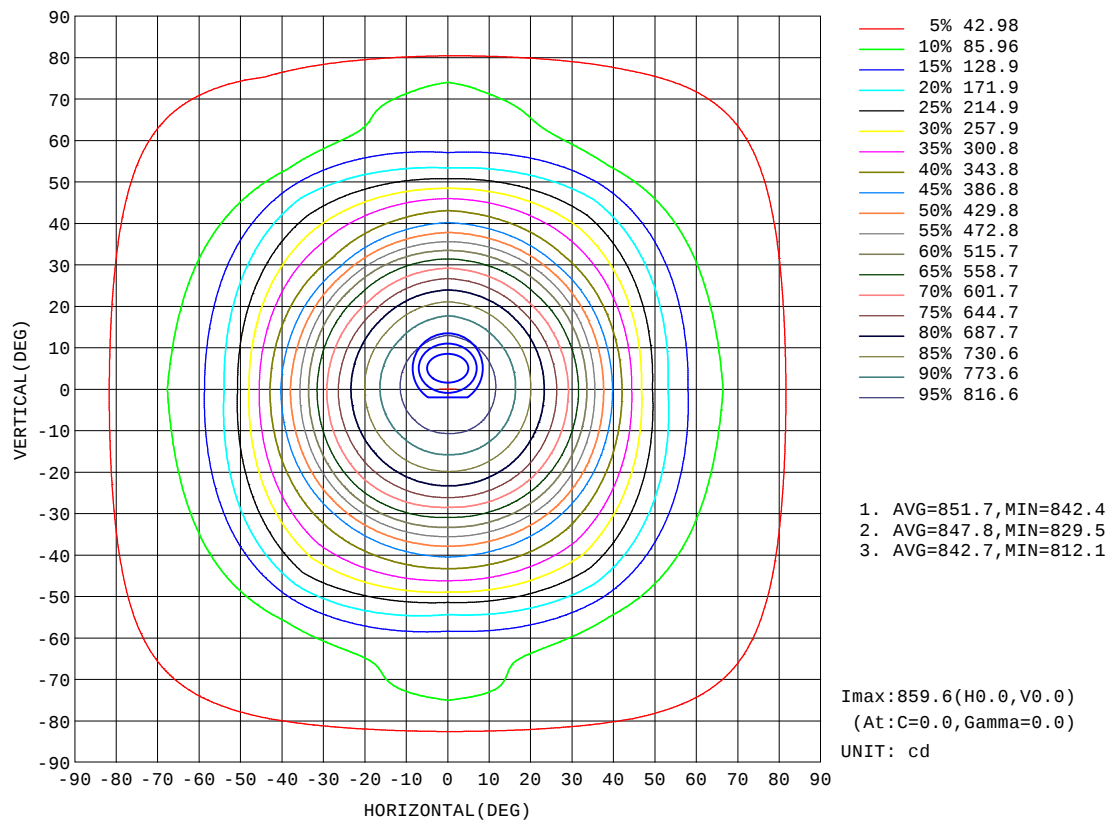


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity: 65.0%
Test Distance: 9.526m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:851.3 lm

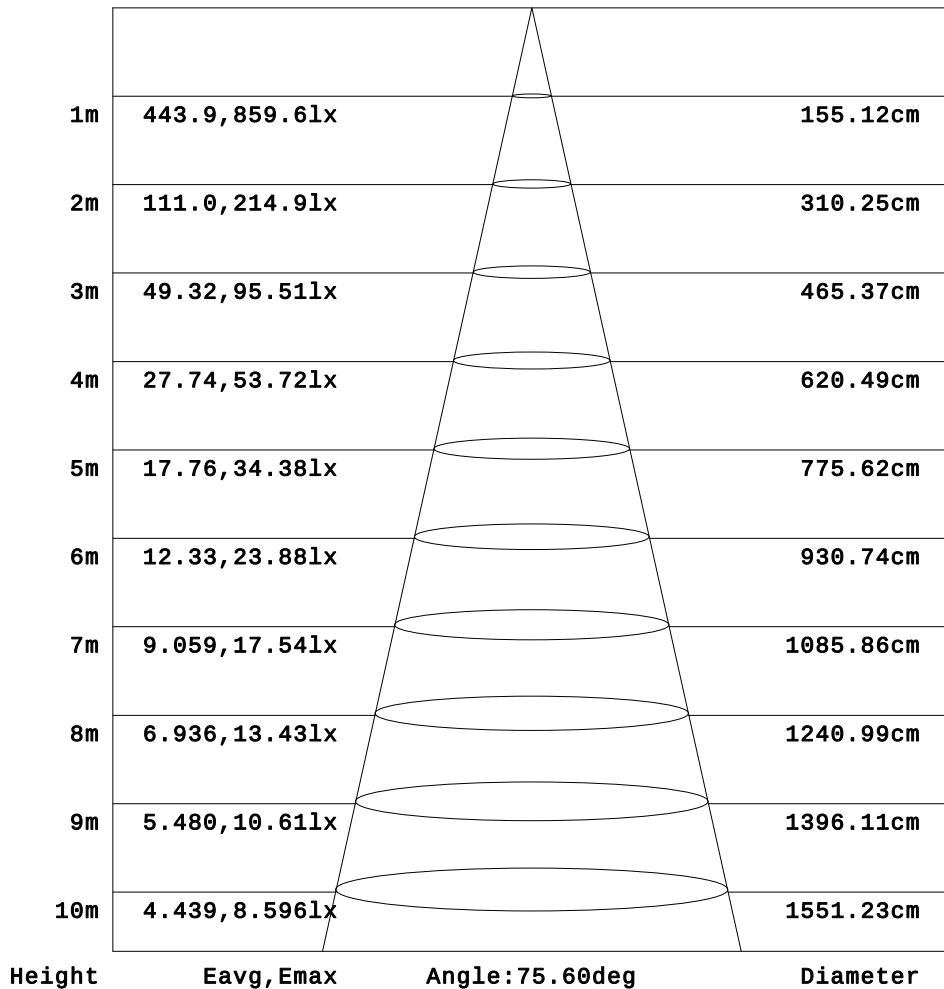


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
 Humidity: 65.0%
 Test Distance: 9.526m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

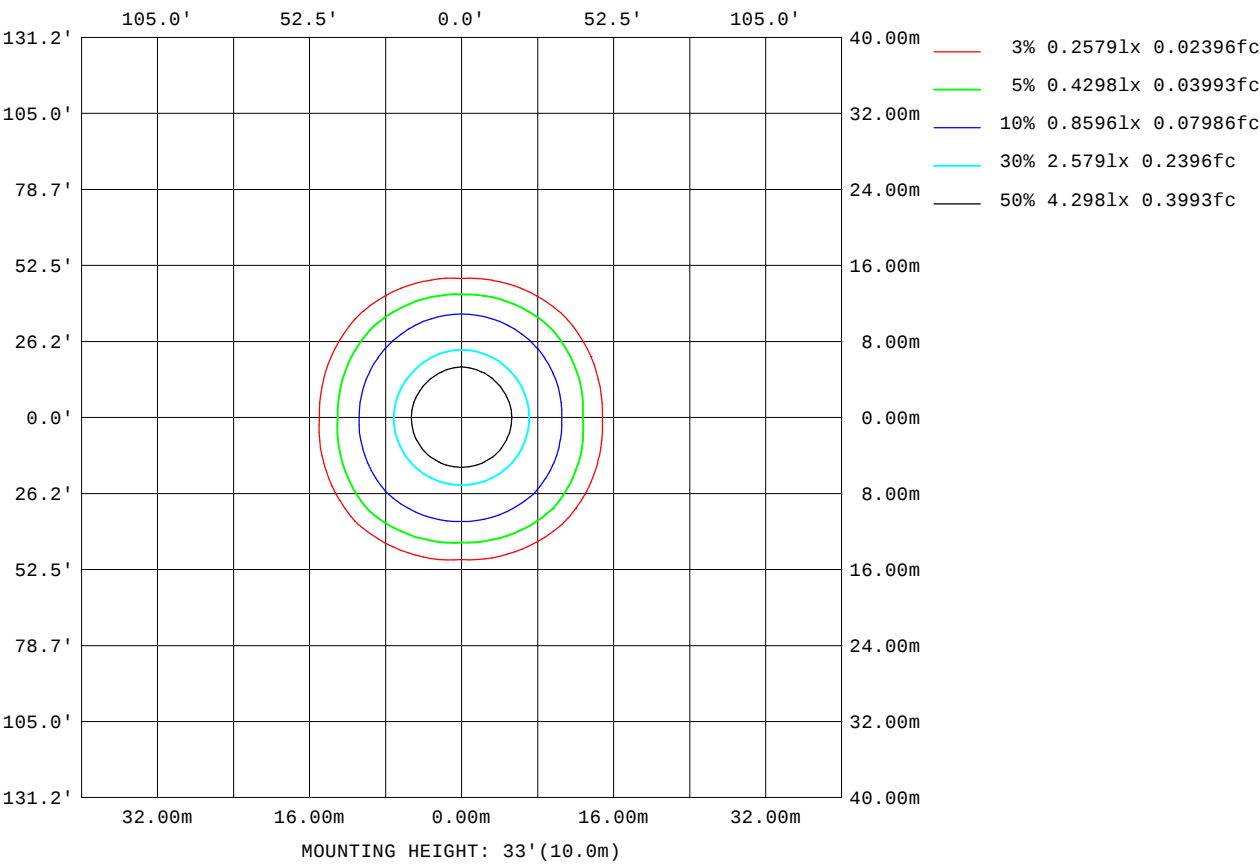

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity:65.0%
Test Distance:9.526m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.8V I:0.1860A P:40.30W PF:0.9760 Lamp Flux:1480.36x1 lm		
NAME: LAFA壁灯 下 3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4763
L_0~180(75)av	6518
L_0~180(85)av	5219
L_90~270(65)av	5280
L_90~270(75)av	6899
L_90~270(85)av	4500
L_45(65)av	3655
L_45(75)av	4686
L_45(85)av	4901

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity:65.0%
Test Distance:9.526m [K=1.0000]
Remarks:

Planar Illuminance Curve

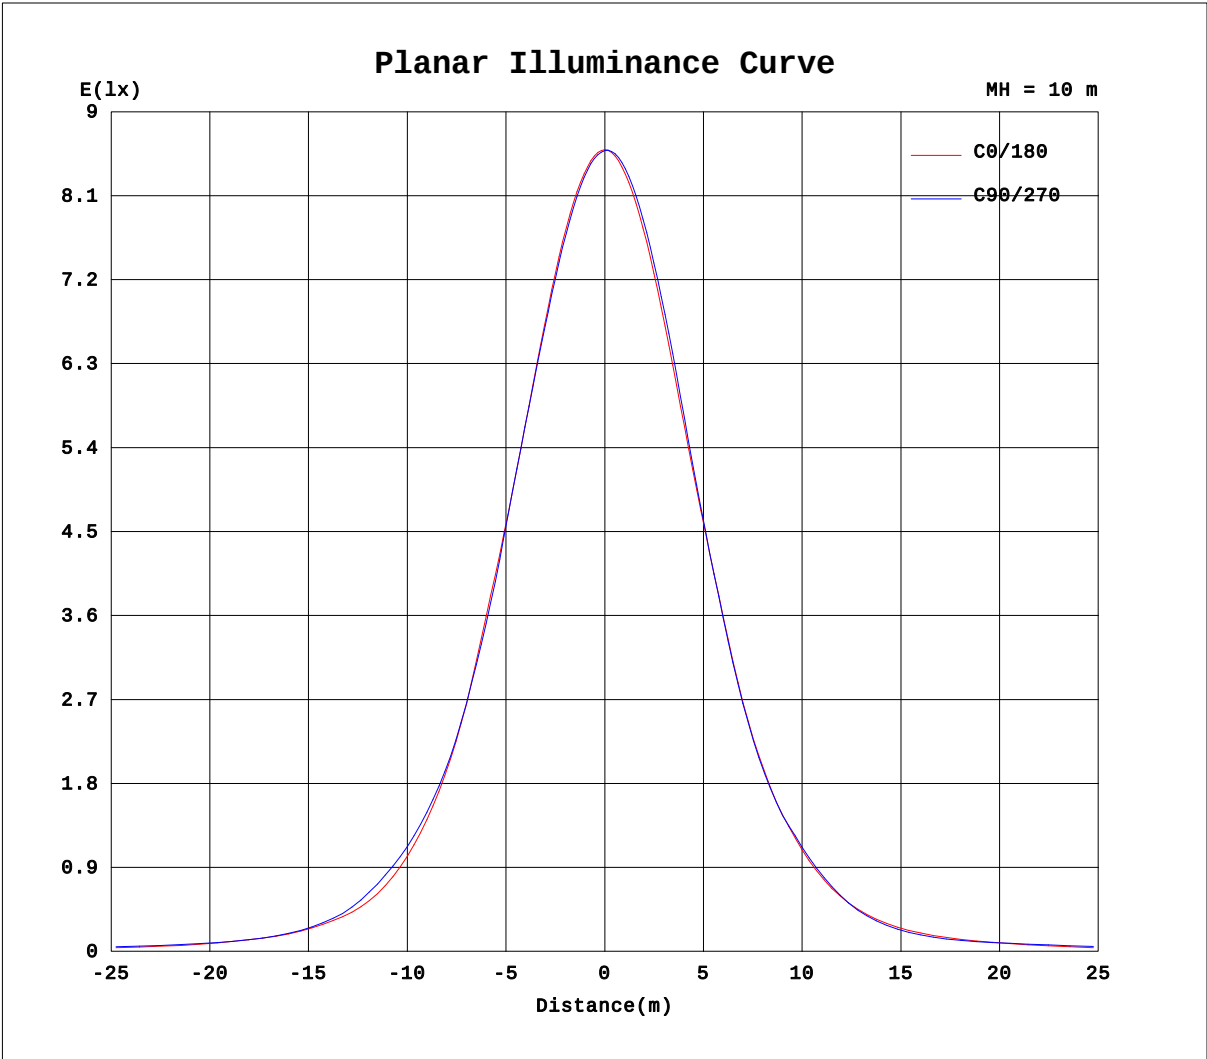

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.295T
Humidity:65.0%
Test Distance:9.526m [K=1.0000]
Remarks: