



Mounting Instructions

1. Terminal block not included. Installation must be performed by a qualified person.
2. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
3. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
4. For models with dimmable LED drivers,
 - Reinforced insulation was maintained between LV circuit and output circuit;
 - Supplementary insulation was maintained between output circuit and DALI circuits (FELV).
 - Basic insulation was maintained between LV circuit and DALI circuits (FELV).
5. Luminaires not suitable for covering with thermally insulating material.
6. The luminaire must be installed by qualified electrician in accordance with local rules and codes.

Luminaires not suitable for covering with thermally insulating material...




Ceiling bracket	
	X2
Screw	
	PA4*40MM X2

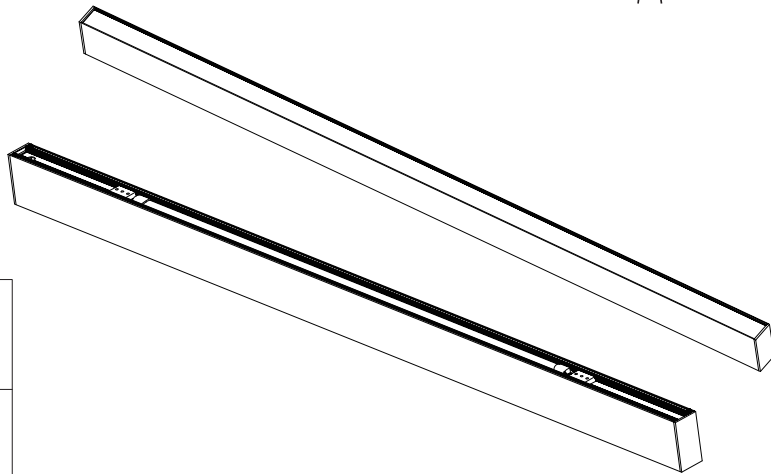

Ceiling Installation Instructions


1. Determine mounting points

Measure and mark two mounting points and the input wire mounting location as needed, then drill out.

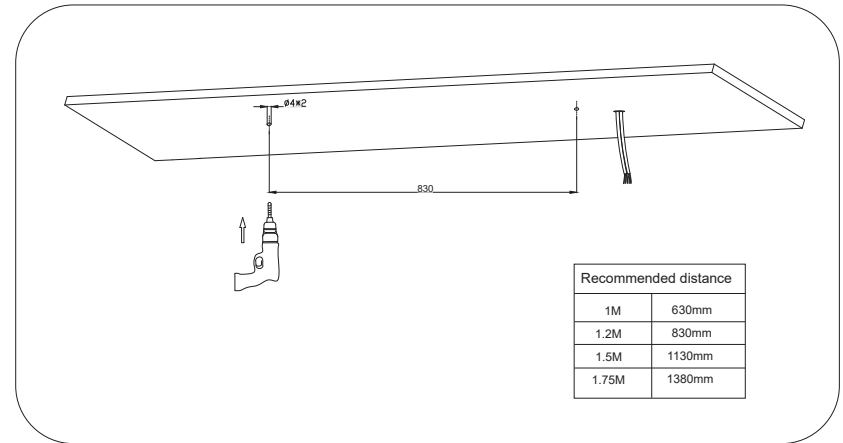


2. Install the ceiling bracket

Secure the ceiling bracket to the ceiling using the provided screws.

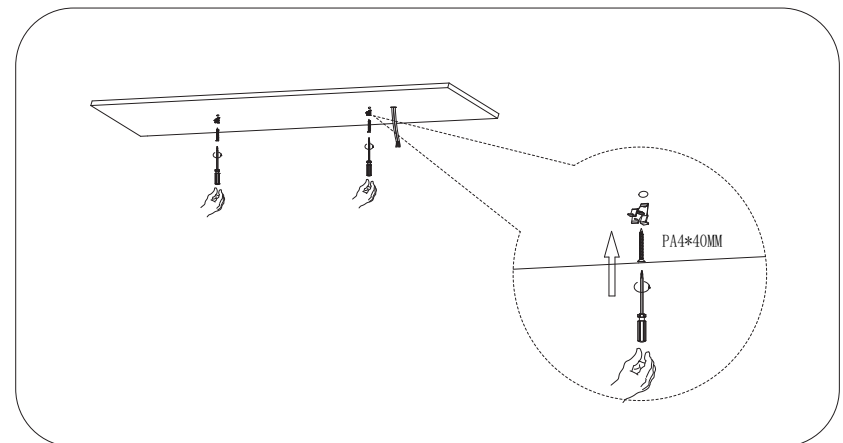


3.Remove the cover

Unscrew and remove the cover screws, then take off the cover.

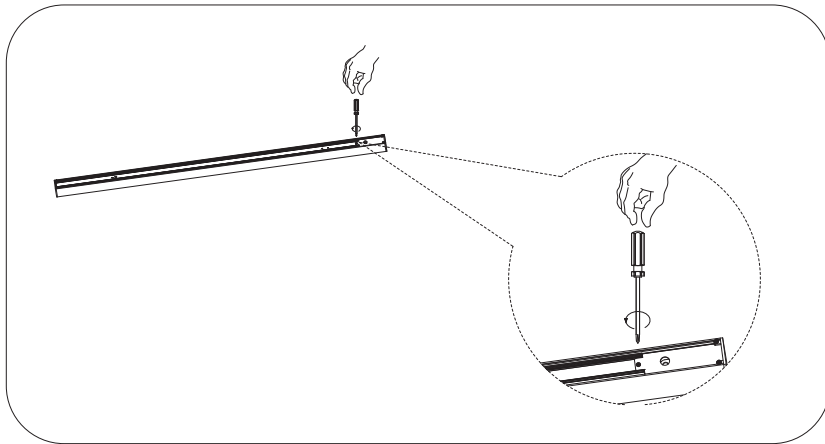


4.Connect the power cord

Connect the AC power cable to the input terminal.

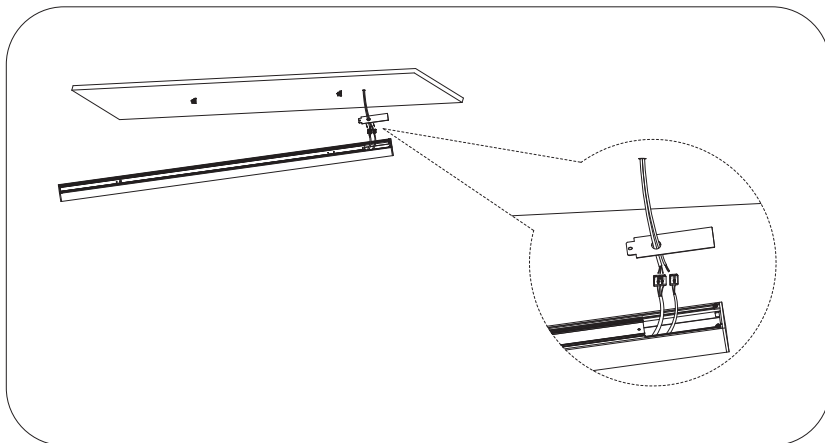


5.Close the cover

Put the cover back in place and secure it using the screws removed earlier.

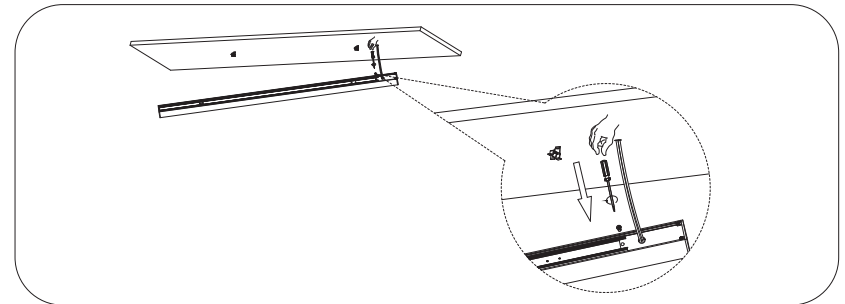

6.Secure the lamp

Rotate the ceiling bracket to align and engage with the lamp's slot, ensuring the lamp is properly fixed in place.

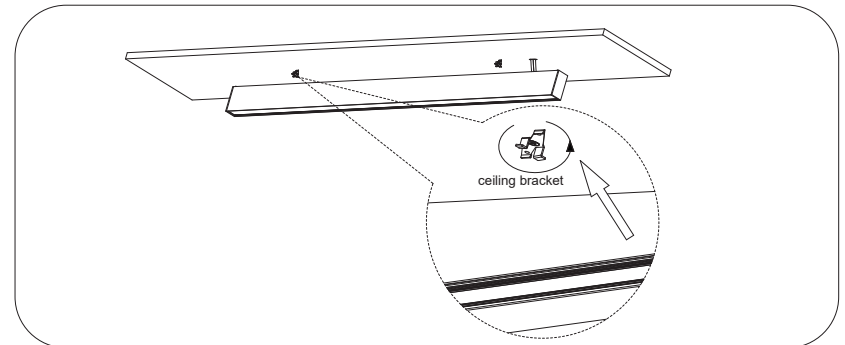

7.Complete installation

Verify that the lamp is securely installed and correctly aligned.

