
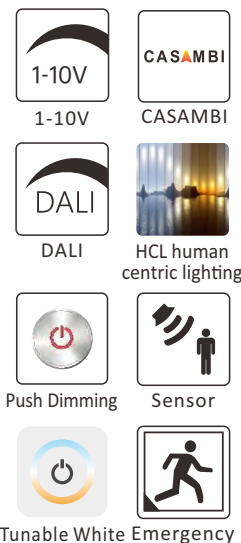


Premline Slim Linear Light

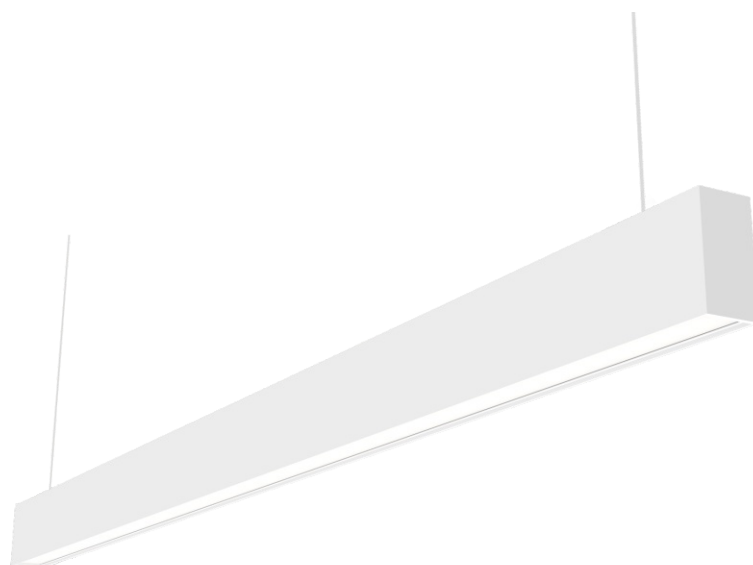

Product Description:

Premline Slim is aesthetic simple designed with only 35mm width of fixture,the direct lights with micro-prismatic diffuser provide no dazzling comfortable light and indirect lights could enhance the uniformity of the whole task area,helping to create balanced luminous environment through reflection from the ceiling.Various used for hospitality area, office working .

Product Features:

- High efficiency up to 130lm/w
- Anti-glare with micro-prismatic optics
- Modular design Indirect light, flexible for stock
- Aesthetic compact design,end cap without screw
- Seamless linkable version optional
- Elegant and compact design, suitable for modern lighting applications
- Pendant, Surface mounted installation available
- HCL intelligent control with Casambi , Presence and Daylight harvesting Sensor and Emergency kit optional


Product Application:

- Office & Education: offices, open-plan offices, staff training facilities, conference rooms, libraries, classrooms
- Retail & Hospitality: checkout areas, shopping malls, supermarket

Product Parameters:


SPECIFICATION	1.2M	1.5M
Power Consumption	33W	42W
Lumens Delivered	4290lm(2574lm↑+1716lm↓)	5460lm(3276lm↑+2184lm↓)
Efficiency	130 lm/W	
Color Temperature	3000K / 4000K/ 3000K-6500K(Turnable White)	
CRI	≥80 (Ra90 Optional)	
SDCM	≤3	
UGR	UGR≤19	
Lumen Maintenance	L80≥50,000hrs @ Ta=25°C	
Input Voltage	200-240V/AC 50/60Hz	
Power Factor	> 0.9	
THD	< 15%	
Dimming	DALI Dimmable/1-10V	
Beam Angle	Direct: 70°↓ / Indirect: 140°↑	
Material	Housing: AL, Diffuser: PC	
Finish Color	Matt White(RAL9016) / Matt Black(RAL9005)	
IP Protection	IP20	
IK Protection	IK02	
Certificate	CE,RoHS	
Warranty	5 Years	

Product Dimension:



Dimension			
PRODUCT	L(mm)	W(mm)	H(mm)
VLFS-D/I 120	1200	35	70
VLFS-D/I 150	1500	35	70

Photometric Diagram:



Indirect/direct light

Product Packing:

Individual version packaging information

Length	QTY/CTN	Carton Size	N.W.	G.W.
1.2m	6 PCS	138x23x25cm	11.5kg	13.5kg
1.5m	6 PCS	169x23x25cm	14.4kg	16.8kg