



EMC TEST REPORT

For

Sundopt LED Lighting Co., Ltd.

LED LUMINAIRES

Test Model: NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD

Additional Models : please refer to model list

Prepared for : Sundopt LED Lighting Co., Ltd.
Address : Bldg 8-6#, TongFuYu Industrial Park Ai Qun Rd Shiyan
Town Baoan District Shenzhen, Guangdong 518108

Prepared by : Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address : Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou
Community, Matian Street, Guangming District, Shenzhen,
Guangdong, China.

Tel : (+86)755-29871520
Fax : (+86)755-29871521
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 15, 2024
Number of tested samples : 3
Serial number : Prototype
Date of Test : November 15, 2024 - November 25, 2024
Date of Report : November 25, 2024



**EMC TEST REPORT****EN IEC 55015:2019+A11:2020**

Emission - Electrical lighting and similar equipment

EN IEC 61547:2023

Equipment for general lighting purposes - EMC immunity requirements

Report Number..... : LCSB05064165E

Date of Issue..... : November 25, 2024

Testing Laboratory Name..... : Shenzhen Southern LCS Compliance Testing Co., Ltd.

Address..... : Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China.

Testing Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name..... : Sundopt LED Lighting Co., Ltd.**

Address..... : Bldg 8-6#, TongFuYu Industrial Park Ai Qun Rd Shiyan Town Baoan District Shenzhen, Guangdong 518108

Test Specification:Standard..... : EN IEC 55015:2019+A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021
EN IEC 61547:2023

Test Report Form No..... : TRF-4-E-014 Ver. A/0

TRF Originator..... : Shenzhen Southern LCS Compliance Testing Co., Ltd.

Master TRF..... : Dated 2016-08

Shenzhen Southern LCS Compliance Testing Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test..... : LED LUMINAIRES

Trademark..... : N/A

Test Model/Type..... : NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD

Rating..... : See model list

Results : PASS**Compiled by:**

Aimee Yang / Engineer

Supervised by:

Kris Mai / Technique Director

Approved by:

Dm Gu / Manager



Shenzhen Southern LCS Compliance Testing Co., Ltd.

Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



EMC - TEST REPORT

Test Report No.....: LCSB05064165E

Applicant.....: Sundopt LED Lighting Co., Ltd.
Address.....: Bldg 8-6#, TongFuYu Industrial Park Ai Qun Rd Shiyan
Town Baoan District Shenzhen, Guangdong 518108
Telephone.....: /
Fax.....: /

Manufacturer.....: Sundopt LED Lighting Co., Ltd.
Address.....: Bldg 8-6#, TongFuYu Industrial Park Ai Qun Rd Shiyan
Town Baoan District Shenzhen, Guangdong 518108
Telephone.....: /
Fax.....: /

Factory.....: Sundopt LED Lighting Co., Ltd.
Address.....: Bldg 8-6#, TongFuYu Industrial Park Ai Qun Rd Shiyan
Town Baoan District Shenzhen, Guangdong 518108
Telephone.....: /
Fax.....: /

The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/product series standard.

POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

☒ Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
☐ Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	November 25, 2024	Initial Issue	-

Remark:
000) : “---”





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. General Description of The Item(s)	6
1.2. Operating Mode(s) Used of Tests	8
1.3. Support / Auxiliary Equipment for The EUT	8
1.4. Description of Test Facility	8
2. STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
3. MEASURING DEVICES AND TEST EQUIPMENT	10
4. VERDICT SUMMARY SECTION	12
4.1. Standard(s)	12
4.2. Overview of Results	13
5. EMISSION TESTS	14
5.1. Conducted Disturbance	14
5.2. Radiated Disturbance (9KHz - 30MHz)	16
5.3. Radiated Disturbance (30MHz - 1GHz)	17
5.4. Harmonic Current	18
5.5. Voltage Fluctuations & Flicker	19
6. IMMUNITY TESTS	20
6.1. Performance Criteria	20
6.2. Electrostatic Discharge	21
6.3. Radio-Frequency Electromagnetic Fields	22
6.4. Electrical Fast Transient / Burst	23
6.5. Injected Currents (Radio-Frequency Common Mode)	24
6.6. Surge	25
6.7. Voltage Dips and Short Interruptions	26
ANNEX A - TEST RESULTS	27
ANNEX B - TEST PHOTOS	48
ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT	53





1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	LED LUMINAIRES
Test Model/Type	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD
Additional Models/Type	See model list
Description of Model difference	See model list
Rating	See model list

Model List:

Declared by applicant as follows:

- All models have similar appearance and structure except power.
- This report after information review and verification, the model(s) "NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD" were chosen as the representative model to perform all the tests.

For all models: 220-240V~, 50/60Hz, Class I, IP20, ta 40°C.

Model No.	Power (W)	LED driver	Size (L*W*Hmm)	Maximum number of interconnection (pcs)
NCP1-1506030-VD-M	60W	BK-CWL060-B1650A	1125*108*46mm	7
NCWP-1206020-VD	60W	BK-KHL060-1650Am or BK-EML060-A1650AMV	1125*108*46mm	7
NCWP-1206020-DD	60W	BK-DAL060-B1650A	1125*108*46mm	7
NCWP-1508025-ND	80W	BK-CWL080-B2000A	1445*108*46mm	5
NCWP-1508025-VD	80W	BK-KML080-B2000AMV	1445*108*46mm	5
NCWP-1508025-DD	80W	BK-DBL080S-A2000ADP	1445*108*46mm	5
NCP1-1205025-ND-R	50W	BK-CWL060-B1300A or BK-CWL060-B1650A	1126*46*80mm	8
NCP1-1205025-ND-RM				
NCP1-1205025-ND-M				
NCP1-1205025-VD-R	50W	BK-KHL050-1300Am or BK-KHL060-1650Am	1126*46*80mm	8
NCP1-1205025-VD-RM				
NCP1-1205025-VD-M				
NCP1-1205025-DD-R	50W	BK-DAL050-1300Ad or BK-DAL060-1650Ad	1126*46*80mm	8
NCP1-1205025-DD-RM				
NCP1-1205025-DD-M				
NCP1-1205025-PD-R	50W	BK-DAL050-1300Ad or BK-DAL060-1650Ad	1126*46*80mm	8
NCP1-1205025-PD-RM				





NCP1-1205025-PD-M				
NCP1-1506030-ND-R	60W	BK-CWL060-B1650A	1446*46*80mm	7
NCP1-1506030-ND-RM				
NCP1-1506030-ND-M				
NCP1-1506030-VD-R	60W	BK-KHL060-1650Am	1446*46*80mm	7
NCP1-1506030-VD-RM				
NCP1-1506030-VD-M				
NCP1-1506030-DD-R	60W	BK-DAL060-1650Ad or BK-DAL080-B2000Ad	1446*46*80mm	7
NCP1-1506030-DD-RM	60W	BK-DAL060-1650Ad or BK-DAL080-B2000Ad	1446*46*80mm	7
NCP1-1506030-DD-M				
NCP1-1506030-PD-R	60W	BK-CWL060-B1650A or BK-DAL080-B2000Ad	1446*46*80mm	7
NCP1-1506030-PD-RM				
NCP1-1506030-PD-M				





1.2. OPERATING MODE(S) USED OF TESTS

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing	
		Emission	Immunity
1	Lighting on mode	☒	☒
2	Maximum light	☐	☐
3	Minimum light	☐	☐
4	Full load	☐	☐

1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/Type	Manufacturer	Supplied by
--			

1.4. DESCRIPTION OF TEST FACILITY

Test Location	Shenzhen Southern LCS Compliance Testing Co., Ltd. Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China. CNAS Registration Number is L10160.
Date of receipt of test item	November 15, 2024
Date(s) of performance of test	November 15, 2024 - November 25, 2024





2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty (U_{lab})
Conducted disturbance (9kHz - 30MHz)	± 2.80 dB
Magnetic field disturbance (9kHz - 30MHz)	± 3.46 dB
Radiated disturbance (30MHz - 200MHz)	± 4.66 dB
Radiated disturbance (200MHz - 1GHz)	± 4.64 dB

Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.





3. MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2024-04-24	2025-04-23
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2024-04-24	2025-04-23
4	Artificial Mains Network	SCHWARZBECK	NSLK 8127	8127716	2024-04-24	2025-04-23
5	Artificial Mains Network	SCHWARZBECK	NSLK 8163	00043	2024-04-24	2025-04-23
6	Impedance Stabilization Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2024-04-24	2025-04-23
7	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2024-04-24	2025-04-23
8	Current Probe	R&S	EZ-17	101921	2024-03-18	2025-03-17
9	EMI Test Software	EZ	EZ_EMC	N/A	/	/

RADIATED DISTURBANCE (9KHz - 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2024-04-24	2025-04-23
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2024-04-24	2025-04-23
4	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2024-04-24	2025-04-23
5	EMI Test Software	EZ	EZ_EMC	N/A	/	/

RADIATED DISTURBANCE (above 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-04-28	2027-04-27
2	EMI Test Receiver	R&S	ESCI3	101010	2024-04-24	2025-04-23
3	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2024-04-29	2025-04-28
4	Coupling Decoupling Network	SCHWARZBECK	CDNE M2	00251	2024-04-24	2025-04-23
5	Coupling Decoupling Network	SCHWARZBECK	CDNE M3	00248	2024-04-24	2025-04-23
6	EMI Test Software	EZ	EZ_EMC	N/A	/	/
7	Controller system	SKET	SKC1000	N/A	/	/

HARMONIC CURRENT & FLICKER						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic Current and Flicker Test System	HTEC	AC2000A	/	2024-04-24	2025-04-23
2	Linear variable frequency power supply	HTEC	HHF-5010	/	2024-04-24	2025-04-23

ELECTROSTATIC DISCHARGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2024-02-24	2025-02-23



**ELECTRICAL FAST TRANSIENT / BURST**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Electrical Fast Transient Generator	HTEC	HEFT51	162201	2024-04-24	2025-04-23
2	EFT Coupling Clamp	HTEC	H3C	163701	2024-04-24	2025-04-23

SURGE

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Surge Generator	3CTEST	SG5006G	EC5581070	2024-04-24	2025-04-23
2	Coupling / Decoupling network	3CTEST	SGN-5010G	EC5591033	2024-04-24	2025-04-23

INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 2 shielded room	CHENGYU	743	/	2023-04-26	2026-04-25
2	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2024-04-24	2025-04-23
3	CDN	HTEC	CDN-M2+M3	A22/0382/2016	2024-04-24	2025-04-23
4	6dB attenuator	HTEC	ATT6	HA1601	2024-04-24	2025-04-23
5	Electromagnetic clamp	LUTHI	EM101	35535	2024-04-24	2025-04-23

POWER FREQUENCY MAGNETIC FIELD

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Frequency Mag-Field Generator System	HTEC	HPFMF100	100-2400	2024-04-24	2025-04-23

VOLTAGEDIPS AND SHORT INTERRUPTIONS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage Dips and up Generator	HTEC	HPFS161P	162202	2024-04-24	2025-04-23

RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-03-02	2026-03-01
2	RF signal generator	Agilent	8648B	3847M00804	2024-02-24	2025-02-23
3	Power amplifier	SKET	LPA 0810-150	202302457	2024-02-24	2025-02-23
4	Field generating antenna	SKET	STLP 9129 Plus	/	/	/
5	Power probe	R&S	NRP-Z11	115232	2024-02-24	2025-02-23
6	Power probe	R&S	NRP-Z11	117755	2024-02-24	2025-02-23
7	Test Software	SKET	EMC-S	N/A	/	/





4. VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results. Refer the next chapter for details of measured test results and applied test levels.

4.1. STANDARD(S)

EN IEC 55015:2019+A11:2020 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN IEC 61547:2023 - Equipment for general lighting purposes — EMC immunity requirements.

EN IEC 61000-3-2:2019+A1:2021 - Electromagnetic compatibility (EMC) Part 3-2: Limits for harmonic current emissions (equipment input current ≤ 16 A per phase).

EN 61000-3-3:2013+A1:2019+A2:2021 - Electromagnetic compatibility (EMC) Part 3-3: Limits for voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection.





4.2. OVERVIEW OF RESULTS

EMISSION TESTS - EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3		
Requirement - Test case	Limit	Verdict
Conducted Disturbance - electric power supply	Table 1, Table 4	PASS
Conducted Disturbance - wired network ports at other than power supply	Table 2, Table 3	N/A
Conducted Disturbance - local wired ports at other than electrical power supply interface of ELV lamp	Table 5, Table 6	N/A
Assessment of the enclosure port	---	---
Radiated Disturbance in the frequency range 9 kHz to 30 MHz	Table 8, Table 9	PASS
Radiated Disturbance in the frequency range 30 MHz to 1 GHz	Table 10	PASS
Harmonic Current	Clause 7	PASS
Voltage Fluctuations and Flicker ²	Clause 5	N/A
IMMUNITY TESTS - EN IEC 61547		
Requirement - Test case	Basic Standard(s)	Verdict
Electrostatic Discharge	IEC/EN 61000-4-2	PASS
Radio-Frequency Electromagnetic Fields	IEC/EN 61000-4-3	PASS
Electrical Fast Transient / Burst	IEC/EN 61000-4-4	PASS
Surge	IEC/EN 61000-4-5	PASS
Injected Currents (Radio-Frequency Common Mode)	IEC/EN 61000-4-6	PASS
Power Frequency Magnetic Field ¹	IEC/EN 61000-4-8	N/A
Voltage Dips and Short Interruptions	IEC/EN 61000-4-11	PASS

Supplementary information:

- 1) Only need to be applied to equipment containing components susceptible to magnetic fields.
- 2) According to EN 61000-3-3:2013+A1:2019+A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1000W and discharge and LED lamp luminaires with ratings less than or equal to 600W, are deemed to comply with the standard and are not required to be tested.





5. EMISSION TESTS

5.1. CONDUCTED DISTURBANCE

Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-1

Disturbance voltage limits at the electric power supply interface

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,009 - 0,05	110	N/A	200 Hz
0,05 - 0,15	90 - 80	N/A	200 Hz
0,15 - 0,5	66 - 56	56 - 46	9 kHz
0,5 - 5,0	56	46	9 kHz
5,0 - 30	60	50	9 kHz

- 1) At the transition frequency, the lower limit applies.
- 2) The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.
- 3) If the EUT is non-restricted ELV lamps, the limits add 26dB.

Disturbance voltage limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	84 - 74	74 - 64	9 kHz
5,0 - 30	74	64	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.
- 2) The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the measured interface.

Disturbance current limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	Limit: Average[dB(μA)]	IF BW
0,15 - 5,0	40 - 30	30 - 20	9 kHz
5,0 - 30	30	20	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0.15MHz to 0.5 MHz.


Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	80	70	9 kHz
5,0 - 30	74	64	9 kHz

- 1) At the transition frequency, the lower limit applies.



Test configuration

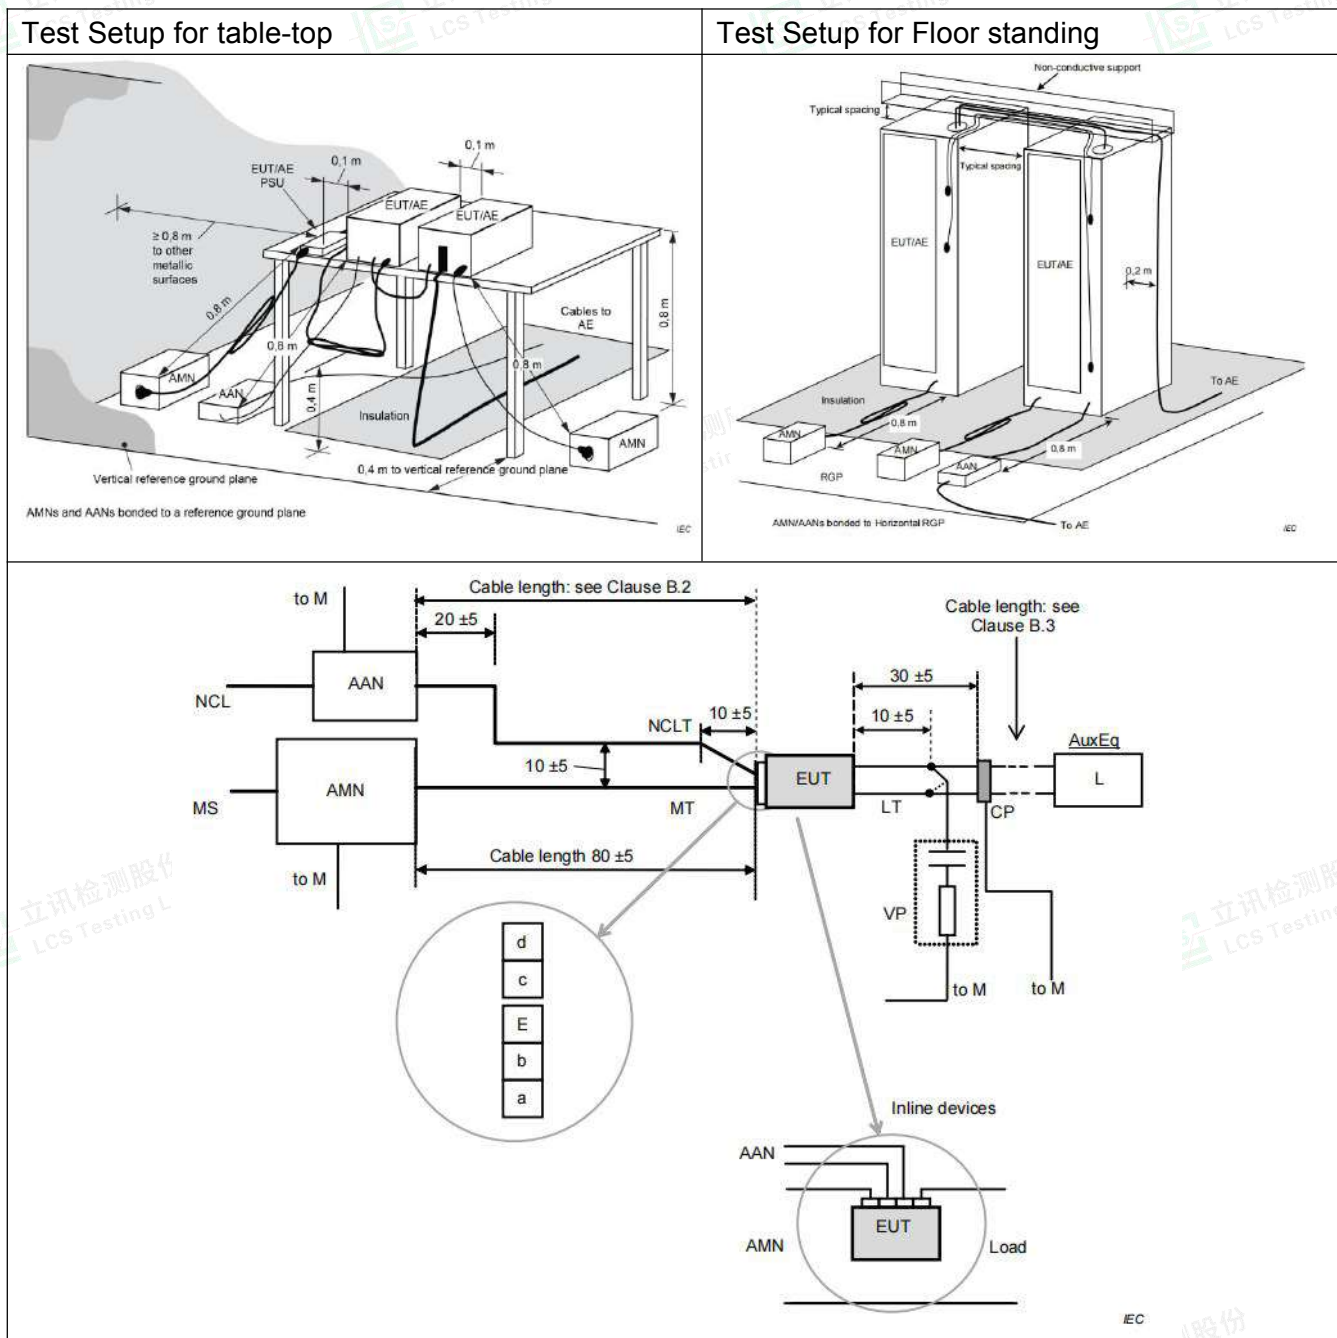

Test Procedure Description

For Table-top, EUT shall be placed at $(0,8 \pm 0,05)$ m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at $(0,12 \pm 0,04)$ m above the reference plane of the test site selected for measurement.

and connected to the AC mains through artificial mains network (LISN). EUT is powered by V-type artificial power network, and the distance from LISN or ANN is 0,8m. the part of the EUT power cord exceeding 0,8m folds in parallel to form a 0,3-0,4 m eights harness.

Test Results refer to Annex A.1





5.2. RADIATED DISTURBANCE (9KHz - 30MHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-3
Test method	Large Loop Antenna (LLA)

LLAS Radiated disturbance limits (2m)

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	IF BW
0,009 - 0,07	88	200 Hz
0,07 - 0,15	88 - 58	200 Hz
0,15 - 3,0	58 - 22	9 kHz
3,0 - 30	22	9 kHz

- 1) At the transition frequency the lower limit applies.
- 2) Decreasing linearly with logarithm of the frequency.

Test configuration

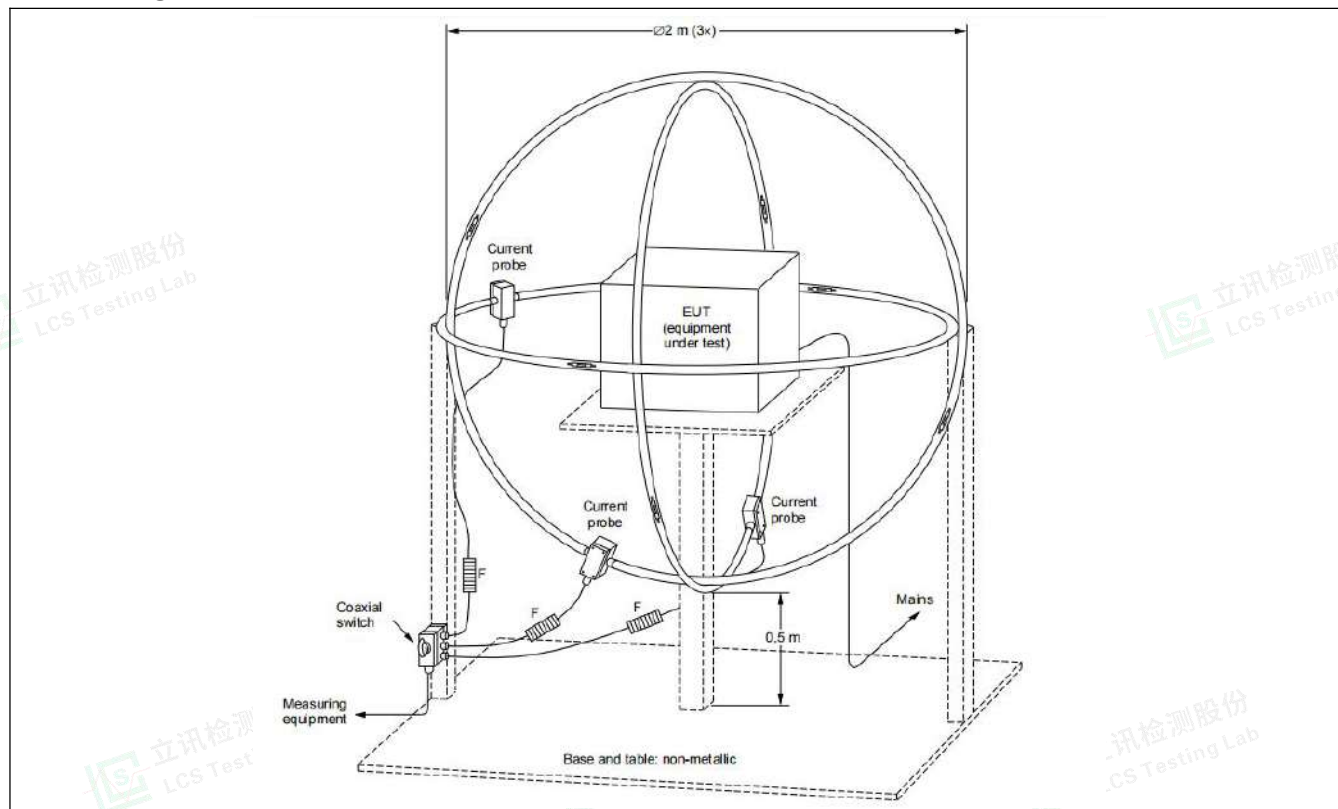

Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. the induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

Test Results refer to Annex A.2





5.3. RADIATED DISTURBANCE (30MHz - 1GHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	CISPR 16-2-3
Test method	Semi Anechoic Chamber (SAC)

SAC Radiated disturbance limit

Frequency range [MHz]	Limit: Quasi-peak [dB(μV/m)]		IF BW
	3 m distance	10 m distance	
30 - 230	40	30	120 KHz
230 - 1000	47	37	120 KHz

- 1) At the transition frequency, the lower limit applies.
- 2) Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

Test configuration

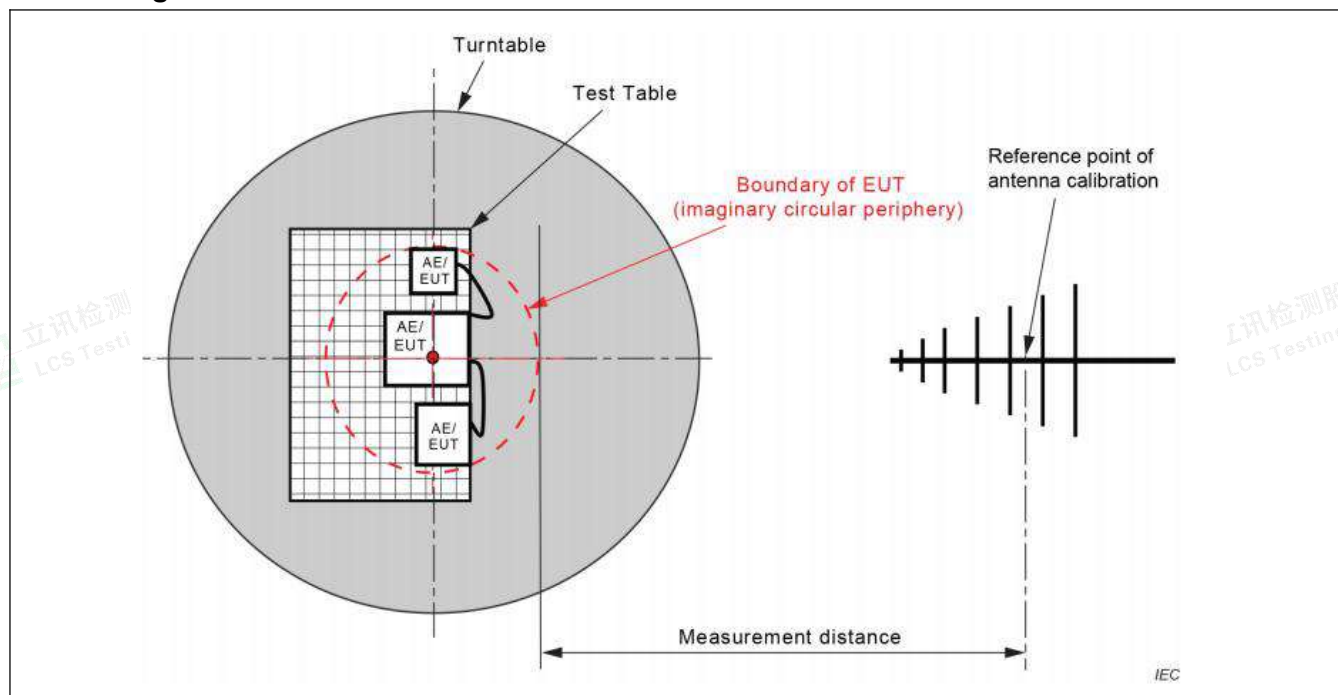

Test Procedure Description

The radiated disturbance test was conducted in a 3m Semi Anechoic Chamber and conforming to CISPR 16-2-3. the EUT is placed on a turntable, which is 0.8 meter high above the ground. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic Antenna (calibrated by Dipole antenna) is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A.3






5.4. HARMONIC CURRENT

Standard	EN IEC 61000-3-2:2019+A1:2021	
Exclusions (For these categories of equipment, limits are not specified in the EN IEC 61000-3-2)	☐	Systems with nominal voltages less than 220V _{AC} (line-to-neutral)
	☐	Lighting equipment with rated power < 5 W
	☐	Equipment with rated power of ≤ 75 W (other than lighting equipment)
	☐	Professional equipment with a total rated power >1kW
	☐	Symmetrically controlled heating elements with rated power ≤ 200 W
	☐	Independent dimmers for incandescent lamps with rated power ≤ 1kW

Classification		
☐	Class A	All equipment not specified as belonging to Class B, C or D
☐	Class B	Portable tools
☒	Class C	☒ Lighting equipment with active input power > 25W
		☐ Lighting equipment with active input power ≥ 5W and ≤ 25W
		☐ Table 3, column 2 (Power-related limits)
		☐ 3rd harmonic ≤ 86%, 5th harmonic ≤ 61% and waveform conditions
☐	Class D	☐ THD ≤ 70%, Harmonic:3rd ≤ 35%, 5th ≤ 25%, 7th ≤ 30%, 9th and 11th ≤ 20%, 2nd ≤ 5%
		Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor

Test configuration

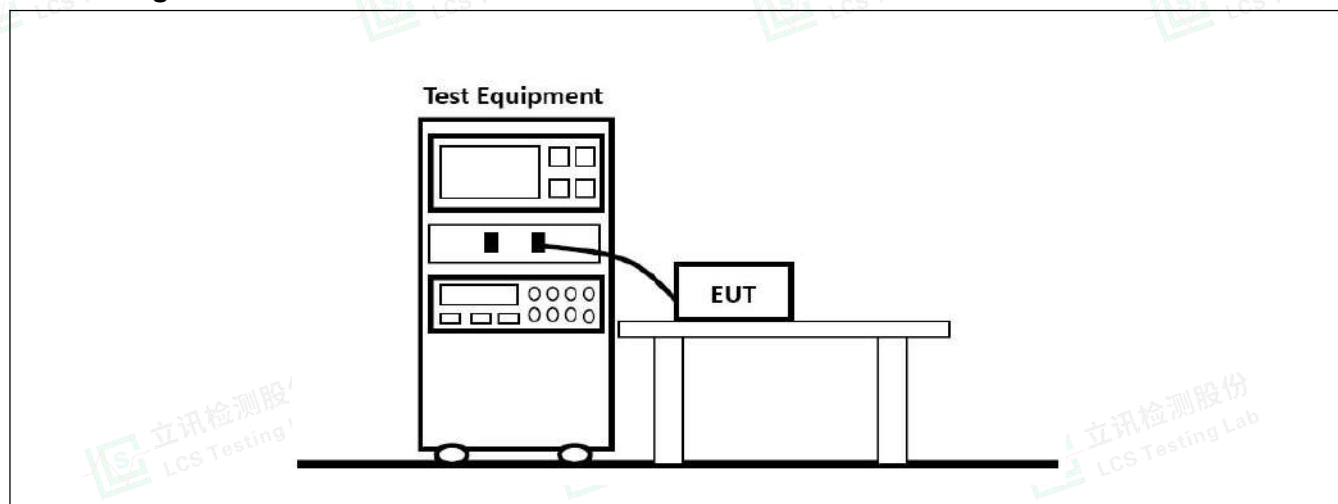

Test Results refer to Annex A.4






5.5. VOLTAGE FLUCTUATIONS & FLICKER

Standard	EN 61000-3-3:2013+A1:2019+A2:2021
----------	-----------------------------------

Limit

P _{st} (Short term flicker)	☐	≤ 1	☒	Not applicable
P _{lt} (Long-term flicker)	☐	≤ 0,65	☒	Not applicable
T _{max} (Accumulated time)	☐	≤ 500 ms	☒	Not applicable
d _c (Relative voltage change)	☐	≤ 3.3%	☒	Not applicable
d _{max} (Max.voltage change)	☐	≤ 4%	☐	≤ 6%
	☐	≤ 7%	☒	Not applicable

Test configuration

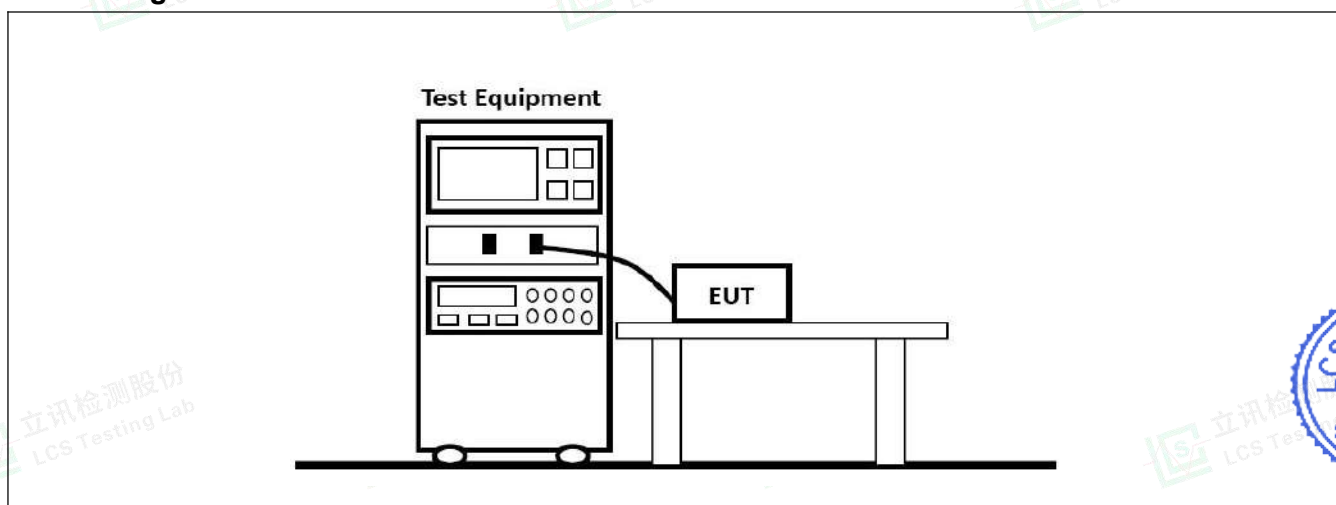



6. IMMUNITY TESTS

6.1. PERFORMANCE CRITERIA

Standard	EN IEC 61547:2023
----------	-------------------

For the various immunity tests that apply, the performance of the following functions shall be assessed, as far as applicable or specified by the manufacturer:

- the luminous intensity of the luminaire or of the light source(s);
- the control function, for example on/off switching, light level setting, colour adjustment, wireless control.

Performance criterion A: during the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: during the test, the luminous intensity may change to any value. after the test, the luminous intensity shall be restored to its initial value within 1 min(30 min for high pressure gas discharge lamps) regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: during and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. after the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and / or operating the regulating control.

Electronic lighting equipment		Tests and performance criteria							
		5.2 (ESD)	5.3 (RS)	5.4 (PFMF)	5.5 (EFT)	5.6 (CS)	5.7 (Surge)	5.8 (Dips)	5.8 (Interruption)
☐	Self-ballasted lamps	B	A	A	B	A	C	B	B
☒	Lighting equipment (excluding self-ballasted lamps) Module in host	B	A	A	B	A	C	B	B'
☐	Luminaire for emergency lighting	B ²	A	A	B ²	A	B ²	See ³	See ³

Supplementary information:

- 1) For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.
- 2) Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.
- 3) These tests do not apply as they are covered by the test in IEC 60598-2-22.
- 4) For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0,5 s.






6.2. ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) is the result of accumulated static electricity from a person or object, for example, walking on a synthetic carpet. ESD can indirectly affect the operation of equipment or damage its electronic components through direct discharge or coupling. both effects were simulated during the test. contact discharge is the preferred test method. twenty discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure (terminals are excluded). air discharges shall be used where contact discharges cannot be applied. discharges shall be applied on the horizontal or vertical coupling planes.

Requirements

Standard	EN IEC 61547:2023							
Basic standard	EN 61000-4-2							
Port under test	Enclosure							
Contact discharge	☒	± 2 kV	☒	± 4 kV	☐	±8 kV	☐	±15 kV
Air discharge	☒	± 2 kV	☒	± 4 kV	☒	±8 kV	☐	±15 kV
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval							
Note : Road and street lighting equipment shall be tested for air discharge at ±15 kV and for contact discharge at ±8 kV. This is to simulate the phenomenon of static charging during thunderstorms.								

Test configuration

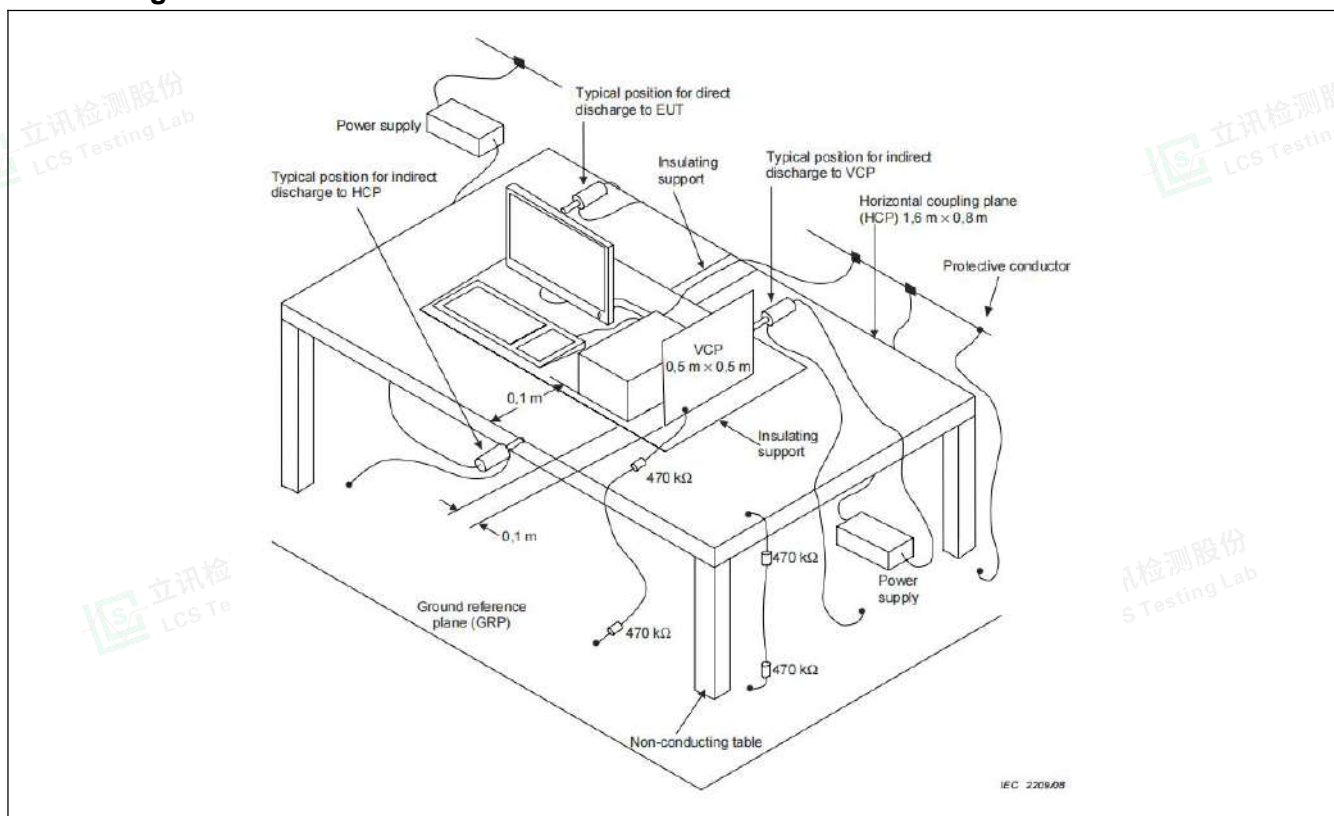

Test Results refer to Annex A.5





6.3. RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

During the test it is verified if the EUT has sufficient immunity against radiated electromagnetic fields.


The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plate. Before the test, the test field strength needs to be calibrated. during the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. during the test, except for EUT, the indoor layout is consistent with the calibration.

The EUT and its simulators are placed on a turn table which is 0,8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. both horizontal and vertical polarization of the antenna are set on test. each of the four sides of EUT must be faced this transmitting antenna and measured individually. in order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

Requirements

Standard	EN IEC 61547:2023			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 - 1000 MHz	3 V/m	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%

Test configuration

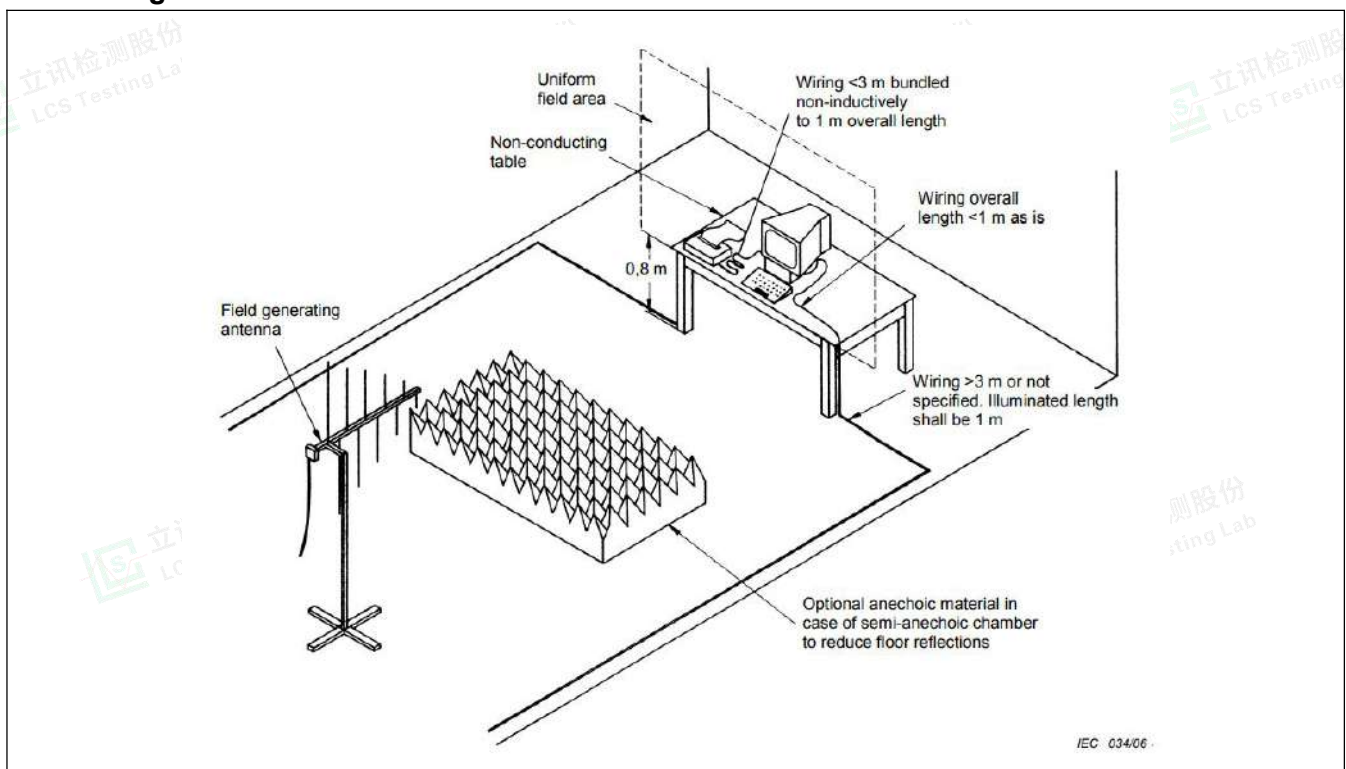

Test Results refer to Annex A.5





6.4. ELECTRICAL FAST TRANSIENT / BURST

The EFT immunity test simulates the disturbances by caused of very short transient bursts.


The EUT is put on the Insulating support which is 0.1 meter high above the ground reference plane. the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5 m. both polarities of the test voltage should be applied during test, fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

Requirements

Standard		EN IEC 61547:2023		
Basic standard		EN 61000-4-4		
Pulse characteristics		5/50 ns		
Port under test		Test level	Repetition frequency	Duration
☒	AC input / output power	± 1000 V	5 kHz	2 min / polarity
☐	DC input / output power ²	± 500 V	5 kHz	2 min / polarity
☐	Signal / control lines and load ¹ ports	± 500 V	5 kHz	2 min / polarity

1) Only applicable to ports interfacing with cables whose total length may exceed 3 m.
2) Not applicable to equipment not connected to the mains while in use.

Test configuration

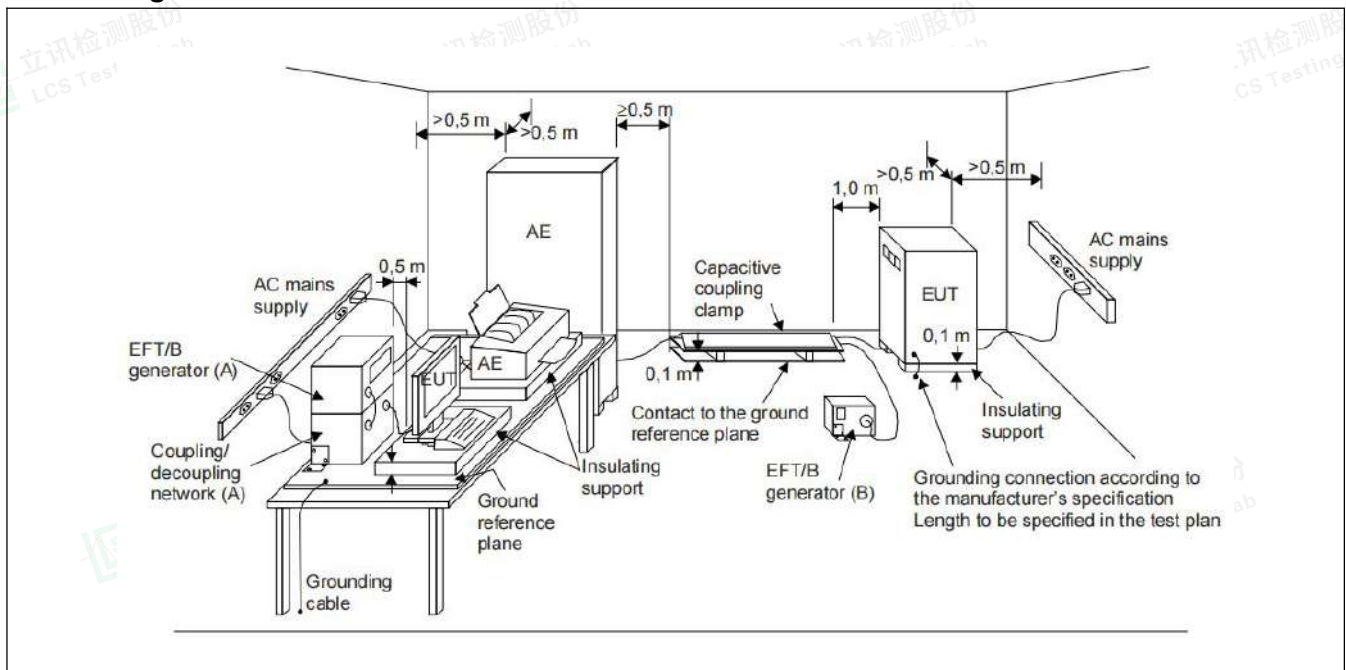

Test Results refer to Annex A.5





6.5. INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

During the test the immunity of the EUT for conducted electromagnetic fields is checked .


The equipment to be tested is placed on an insulating support of $0,1 \text{ m} \pm 0,05 \text{ m}$ height above a reference ground plane. a non conductive roller / caster in the range of $0,1 \text{ m} \pm 0,05 \text{ m}$ above the reference ground plane can be used as an alternative to an insulating support. all cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. The coupling and decoupling devices shall be placed on the reference ground plane, making direct contact with it at a distance of 0,1 m to 0,3 m from the EUT.

Requirements

Standard		EN IEC 61547:2023			
Basic standard		EN 61000-4-6			
Frequency range		0,15 - 80 MHz			
Port under test		Test level	Modulation	Dwell time	Step size
☒	AC input / output power	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$
☐	DC input / output power ^{1 2}	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$
☐	Signal / control line ²	3 V	1 kHz, 80 % AM	$\geq 0,5 \text{ s}$	$\leq 1\%$

1) Not applicable to equipment not connected to the mains while in use.
2) Only applicable to ports interfacing with cables whose total length may exceed 3 m.

Test configuration

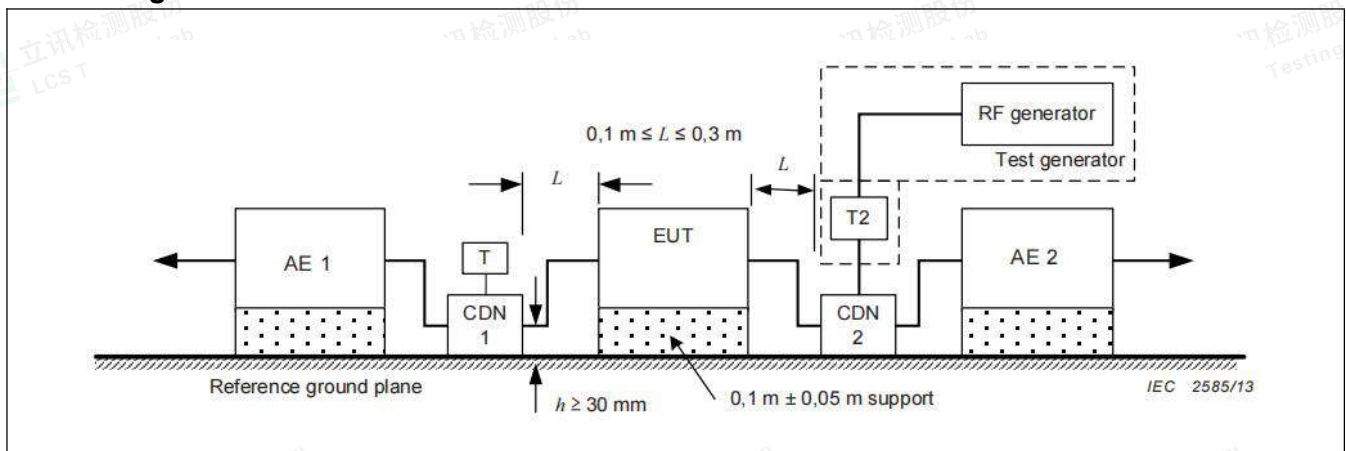

Test Results refer to Annex A.5





6.6. SURGE

The surge immunity test simulates unidirectional surges caused by overvoltages from switching and lightning transients.


The surge is applied to the EUT power supply terminal via the capacitive coupling network, to the EUT power supply provide a 1,2/50 μ s voltage surge (at open-circuit condition), at least 5 positive and 5 negative tests with 1 min or less repetition rate are conducted during test. and phase angles is 90° and 270°.

Requirements

Standard		EN IEC 61547:2023			
Basic standard		EN 61000-4-5			
Pulse wave-shape		1,2/50 μ s			
Repetition rate		1 per minute or faster			
Number of pulses		5 pulses (at each polarity and phase angles)			
Classification		Port under test	Test Level	Coupling	Phase angle
☒	Lighting equipment (except self ballasted lamps ≤ 25 W)	AC input power	+ 1 kV	line - line	90°
			- 1 kV	line - line	270°
			+ 2 kV	line - ground	90°
			- 2 kV	line - ground	270°
☐	Self-ballasted lamps ≤ 25 W	AC input power	+ 0,5 kV	line - line	90°
			- 0,5 kV	line - line	270°
			N/A	line - ground	N/A
			N/A	line - ground	N/A

- 1) In addition to the specified test level, all lower test levels as detailed in EN 61000-4-5 should also be satisfied.
- 2) Road and street lighting equipment shall comply with $\pm 2,0$ kV line to line and $\pm 4,0$ kV line to ground voltages.

Test configuration

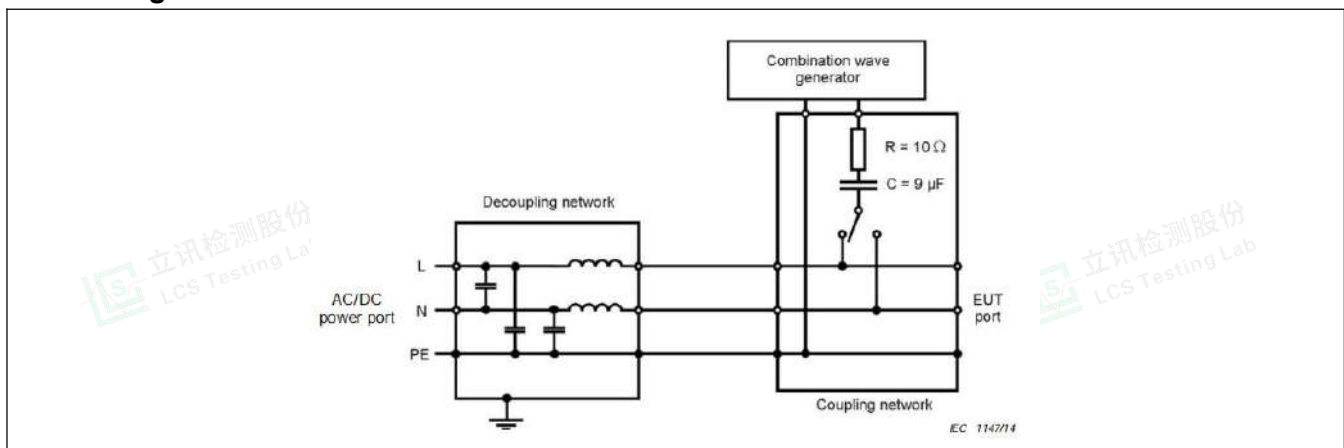

Test Results refer to Annex A.5





6.7. VOLTAGE DIPS AND SHORT INTERRUPTIONS

The surge immunity test simulates Voltage dips and short interruptions occur due to faults in a (public or non-public) network or in installations by sudden changes of large loads.

The EUT shall be connected to the test generator for testing using the shortest power cable specified by the EUT manufacturer and, if no cable length is specified, the shortest cable suitable for the EUT, each representative mode of operation shall be tested. for short interruptions to use 0° for one of the phases.


Requirements

Standard	EN IEC 61547:2023		
Basic standard	EN 61000-4-11		
# of dips / interruptions	3 dips / interruptions for each test level and phase angle		
Intervals between events	≥ 10 s		
Port under test	Test level ¹	Number of periods (cycles)	
		50Hz	60Hz
AC input power	70% of U_{NOM}	10	12
	0% of U_{NOM}	0,5	0,5

1) Where the equipment has a rated voltage range the following shall apply:

- If the voltage range does not exceed 20 % of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for the test level specification.
- in all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.

Test configuration

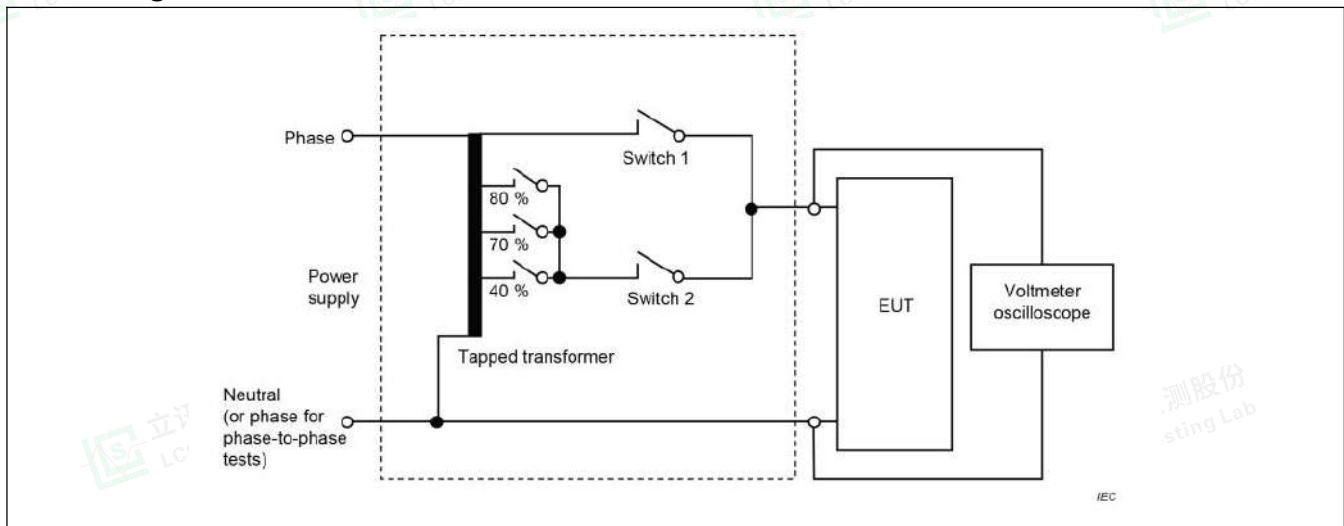

Test Results refer to Annex A.5






ANNEX A - TEST RESULTS

A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	24.4℃, 54% RH
Model	NCP1-1506030-VD-M
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Line

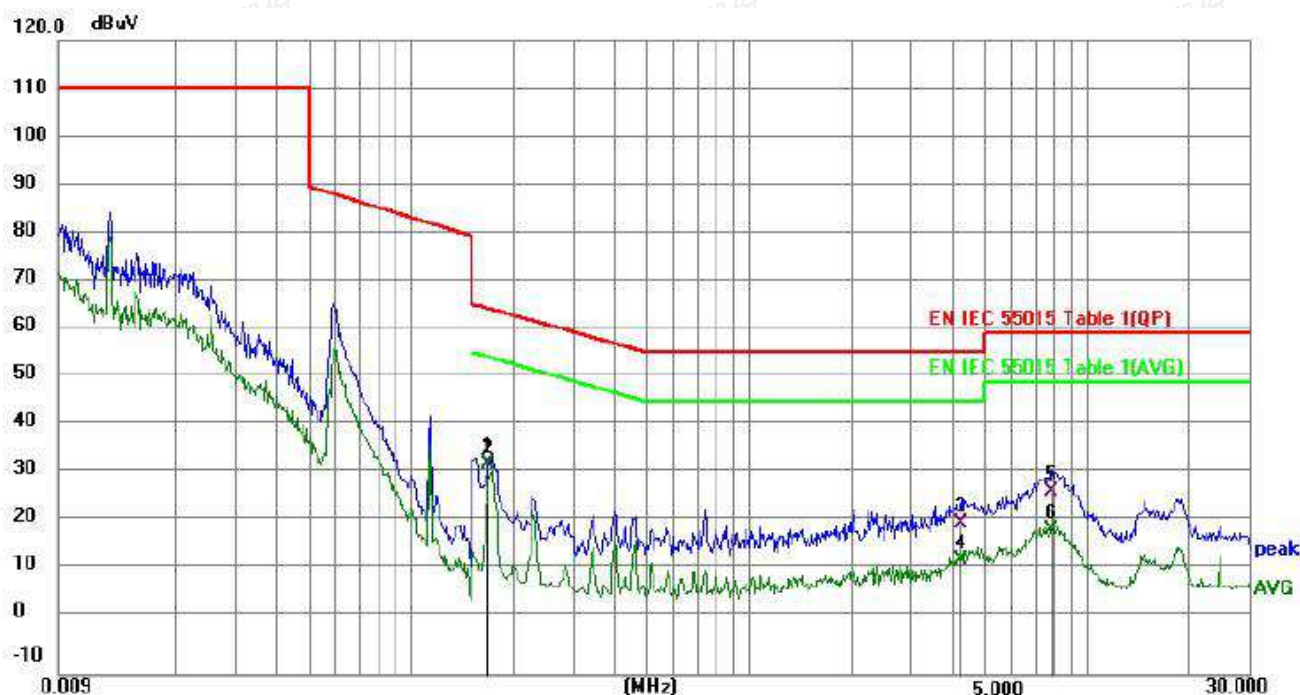


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1694	22.50	10.96	33.46	64.99	-31.53	QP	
2	*	0.1694	22.03	10.96	32.99	54.99	-22.00	AVG	
3		4.2558	10.06	11.09	21.15	56.00	-34.85	QP	
4		4.2558	2.55	11.09	13.64	46.00	-32.36	AVG	
5		7.8389	16.30	11.23	27.53	60.00	-32.47	QP	
6		7.8389	8.55	11.23	19.78	50.00	-30.22	AVG	





Environmental Conditions	24.4℃, 54% RH
Model	NCP1-1506030-VD-M
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Neutral

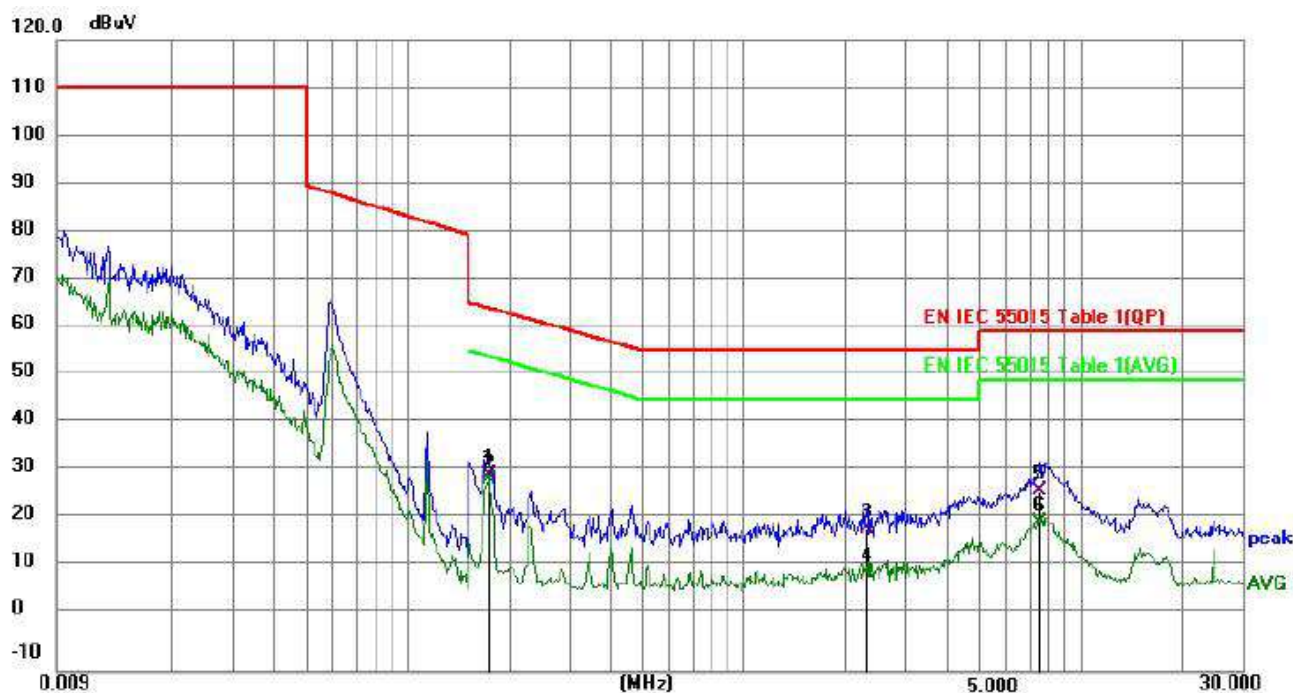


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1727	19.61	10.87	30.48	64.83	-34.35	QP	
2	*	0.1727	18.76	10.87	29.63	54.83	-25.20	AVG	
3		2.3042	8.59	10.98	19.57	56.00	-36.43	QP	
4		2.3042	-0.60	10.98	10.38	46.00	-35.62	AVG	
5		7.4950	16.05	11.16	27.21	60.00	-32.79	QP	
6		7.4950	9.45	11.16	20.61	50.00	-29.39	AVG	





Environmental Conditions	24.4°C, 54% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Line

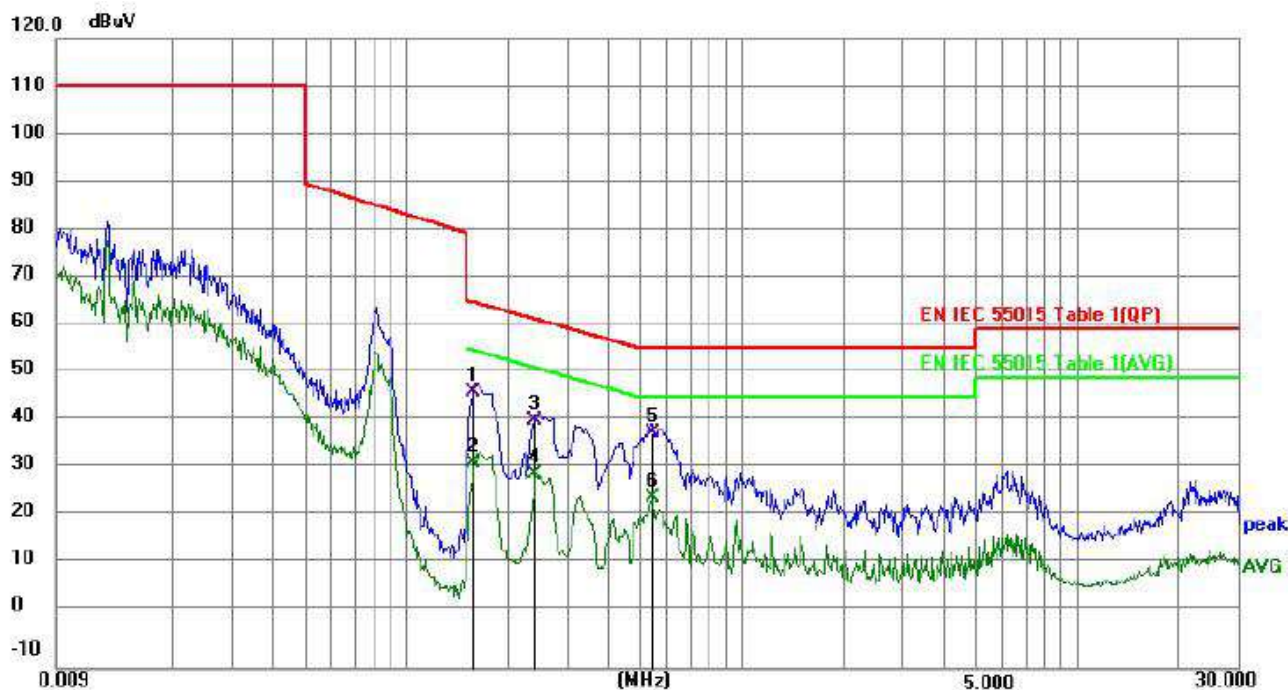


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	36.00	10.94	46.94	65.57	-18.63	QP	
2		0.1580	21.36	10.94	32.30	55.57	-23.27	AVG	
3		0.2418	30.05	10.99	41.04	62.03	-20.99	QP	
4		0.2418	19.15	10.99	30.14	52.03	-21.89	AVG	
5	*	0.5388	27.64	10.88	38.52	56.00	-17.48	QP	
6		0.5388	14.49	10.88	25.37	46.00	-20.63	AVG	





Environmental Conditions	24.4°C, 54% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	Neutral

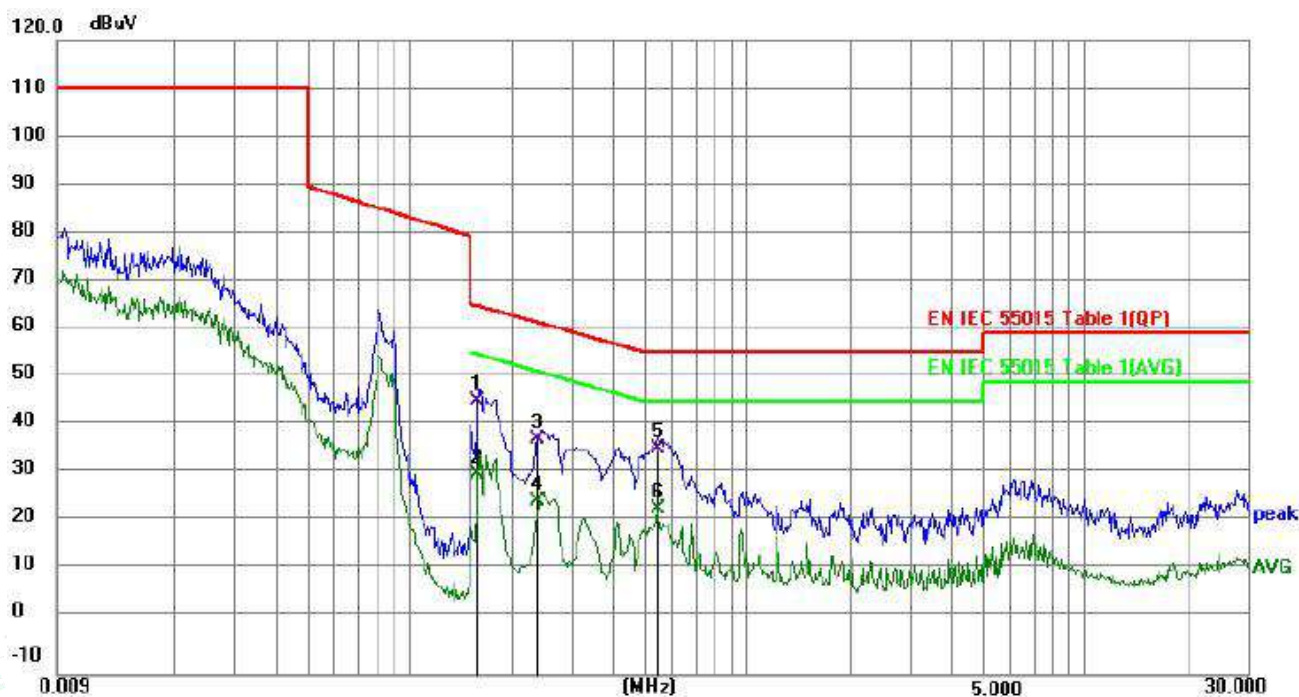


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1584	35.07	10.84	45.91	65.55	-19.64	QP	
2		0.1584	20.28	10.84	31.12	55.55	-24.43	AVG	
3		0.2383	27.36	10.91	38.27	62.16	-23.89	QP	
4		0.2383	14.74	10.91	25.65	52.16	-26.51	AVG	
5		0.5373	25.37	10.87	36.24	56.00	-19.76	QP	
6		0.5373	13.02	10.87	23.89	46.00	-22.11	AVG	





Environmental Conditions	24.4°C, 54% RH
Model	NCWP-1508025-DD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	Line

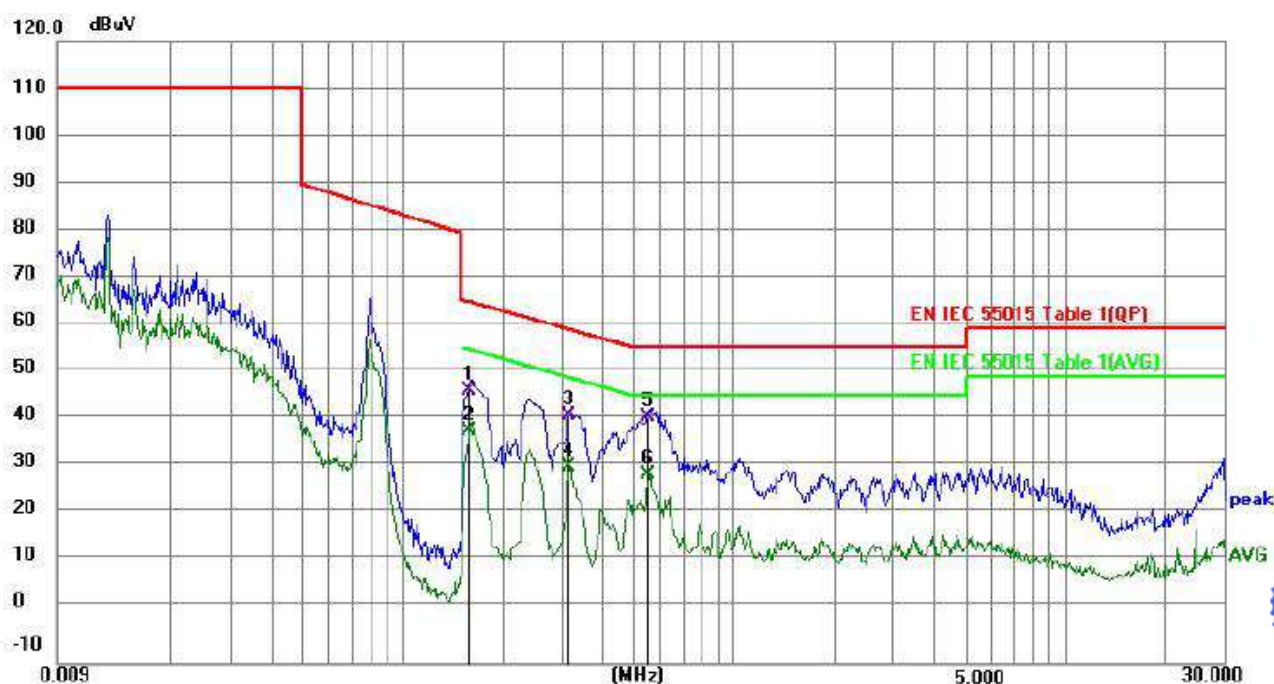


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1566	36.08	10.94	47.02	65.64	-18.62	QP	
2		0.1566	27.74	10.94	38.68	55.64	-16.96	AVG	
3		0.3163	30.80	10.97	41.77	59.80	-18.03	QP	
4		0.3163	20.08	10.97	31.05	49.80	-18.75	AVG	
5	*	0.5479	30.54	10.88	41.42	56.00	-14.58	QP	
6		0.5479	18.55	10.88	29.43	46.00	-16.57	AVG	





Environmental Conditions	24.4℃, 54% RH
Model	NCWP-1508025-DD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Neutral

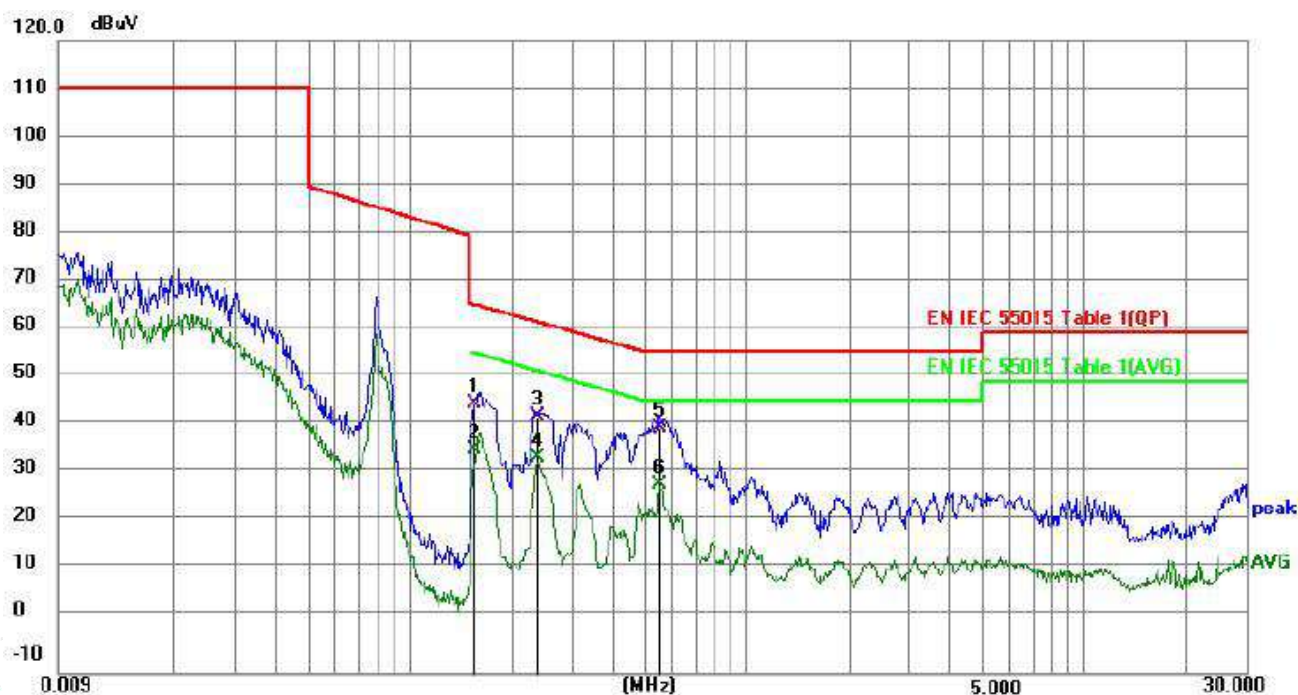


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1542	34.47	10.84	45.31	65.77	-20.46	QP	
2		0.1542	25.17	10.84	36.01	55.77	-19.76	AVG	
3		0.2376	32.01	10.91	42.92	62.18	-19.26	QP	
4		0.2376	23.46	10.91	34.37	52.18	-17.81	AVG	
5	*	0.5481	29.62	10.87	40.49	56.00	-15.51	QP	
6		0.5481	17.96	10.87	28.83	46.00	-17.17	AVG	



**A.2. RADIATED DISTURBANCE TEST RESULTS (9kHz - 30MHz)**

Environmental Conditions	24.4℃, 54% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	X

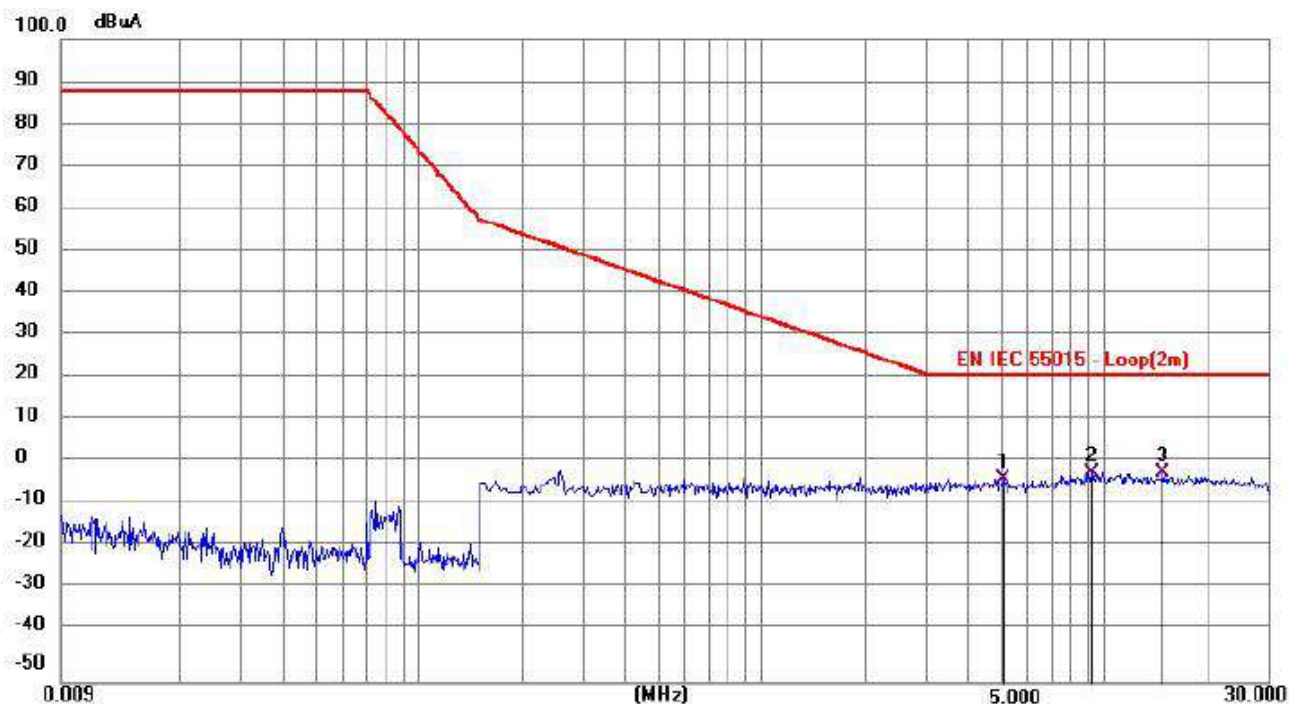


No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		5.0360	-27.48	25.10	-2.38	22.00	-24.38	QP	
2		9.1787	-26.99	25.79	-1.20	22.00	-23.20	QP	
3	*	14.8126	-26.83	25.72	-1.11	22.00	-23.11	QP	





Environmental Conditions	24.4℃, 54% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Y

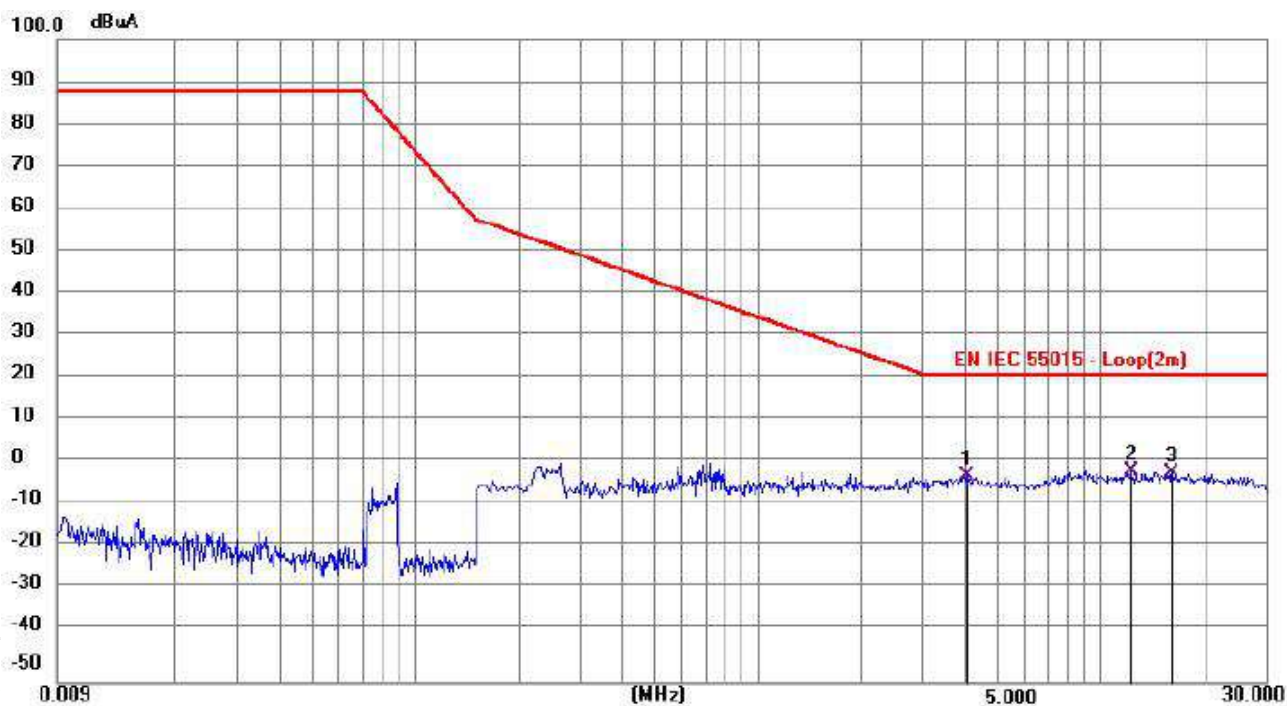


No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		4.0605	-27.81	26.07	-1.74	22.00	-23.74	QP	
2	*	12.1560	-27.01	26.23	-0.78	22.00	-22.78	QP	
3		16.0124	-27.03	25.92	-1.11	22.00	-23.11	QP	





Environmental Conditions	24.4℃, 54% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Z

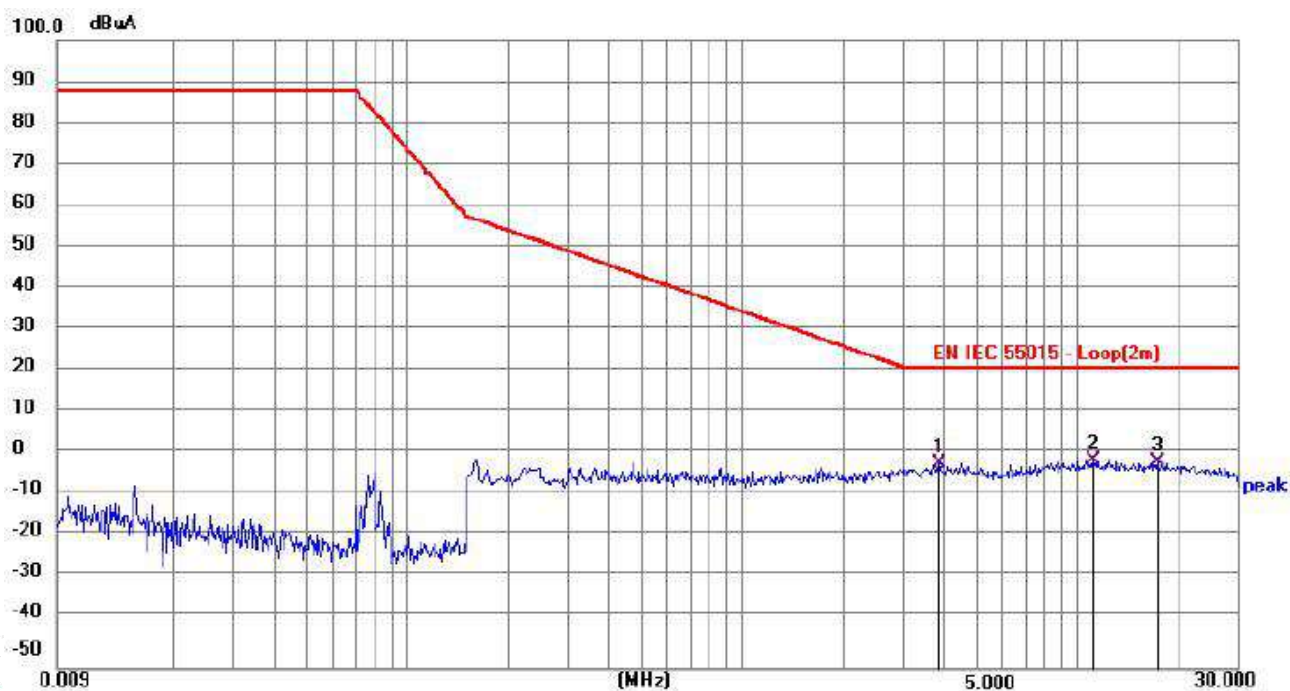

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuA	dB	dBuA	dBuA	dB	Detector	Comment
1		3.8670	-27.52	26.42	-1.10	22.00	-23.10	QP	
2	*	11.1840	-27.00	26.86	-0.14	22.00	-22.14	QP	
3		17.3535	-26.63	26.12	-0.51	22.00	-22.51	QP	





A.3. RADIATED DISTURBANCE TEST RESULTS (30MHz - 1GHz)

Environmental Conditions	25.3℃, 50% RH
Model	NCP1-1506030-VD-M
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		51.0985	1.89	14.79	16.68	40.00	-23.32	QP		
2		98.3141	3.84	13.70	17.54	40.00	-22.46	QP		
3	*	117.6693	6.49	11.77	18.26	40.00	-21.74	QP		





Environmental Conditions	25.3℃, 50% RH
Model	NCP1-1506030-VD-M
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Horizontal

80.0 dBuV/m

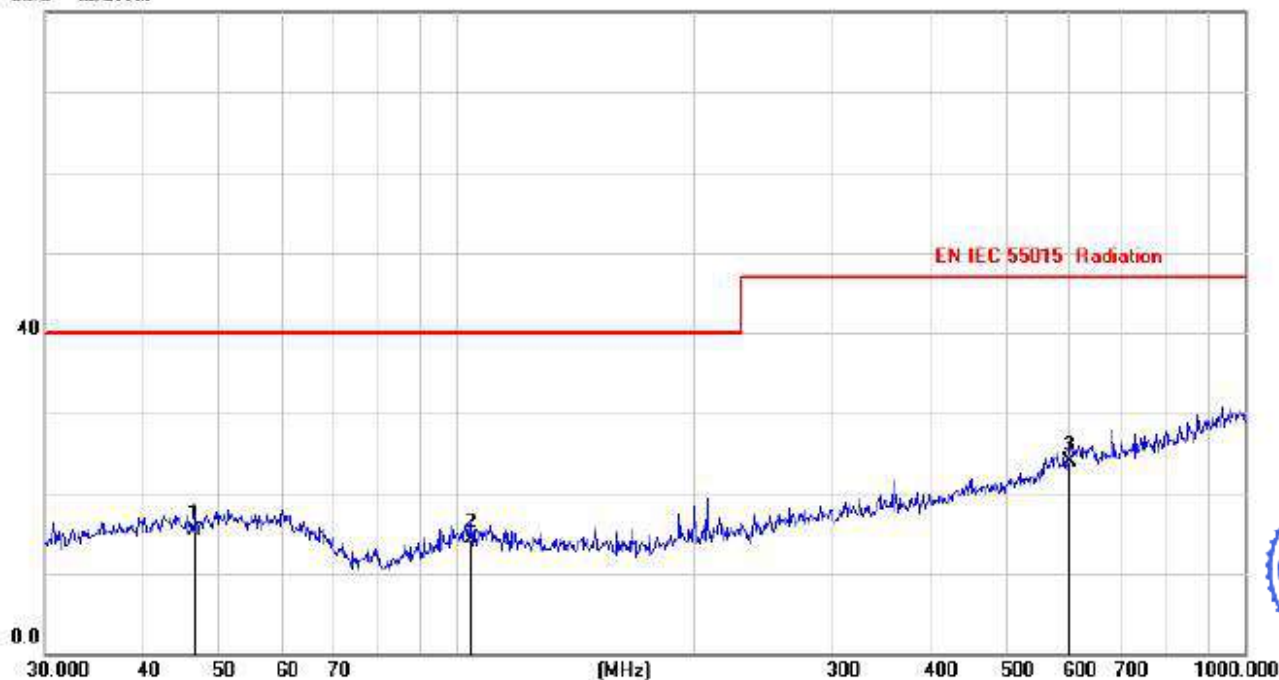

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		46.6255	1.75	13.61	15.36	40.00	-24.64	QP		
2		104.4445	2.33	11.88	14.21	40.00	-25.79	QP		
3	*	600.6362	3.29	20.71	24.00	47.00	-23.00	QP		





Environmental Conditions	25.3°C, 50% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	111.0057	11.53	12.63	24.16	40.00	-15.84	QP		
2		135.0319	6.31	10.79	17.10	40.00	-22.90	QP		
3		233.6557	10.94	12.47	23.41	47.00	-23.59	QP		





Environmental Conditions	25.3℃, 50% RH
Model	NCWP-1508025-VD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Horizontal

80.0 dBuV/m



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	59.4405	6.01	13.24	19.25	40.00	-20.75	QP		
2		111.1031	4.80	11.62	16.42	40.00	-23.58	QP		
3		234.3737	6.87	12.39	19.26	47.00	-27.74	QP		





Environmental Conditions	25.3°C, 50% RH
Model	NCWP-1508025-DD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V, 50Hz
Test engineer	Aru Yang
Pol	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		103.4421	4.53	13.60	18.13	40.00	-21.87	QP		
2	*	159.9947	11.11	10.14	21.25	40.00	-18.75	QP		
3		195.3076	8.20	11.84	20.04	40.00	-19.96	QP		





Environmental Conditions	25.3℃, 50% RH
Model	NCWP-1508025-DD
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang
Pol	Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	182.9598	7.62	10.63	18.25	40.00	-21.75	QP		
2		260.6010	8.29	13.13	21.42	47.00	-25.58	QP		
3		320.3579	6.98	15.08	22.06	47.00	-24.94	QP		



**A.4. HARMONIC CURRENT TEST RESULTS**

Model	NCP1-1506030-VD-M						
Operating mode	Mode 1						
Test voltage	AC 230V,50Hz						
Test engineer	Aru Yang						
Test Result: Pass		Source qualification(Power On Load): Idle - Pass					
THC(mA): 19.080		I - THD(%): 7.3		POHC(mA):3.320		POHC Limit(mA):24.903	
Parameter values during test:							
V_RMS (Volts): 229.9				Frequency(Hz): 50.0			
I_RMS(mA): 263.9				Crest Factor: 1.451			
Power (Watts): 59.3				Power Factor: 0.977			
Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I Fund	262.500						
2	0.260	5.250	0.300	5.714	0.310	3.937	Pass
3	15.510	70.875	15.800	22.293	15.930	14.984	Pass
4	0.170	-	0.200	-	0.220	-	N/A
5	3.930	26.250	4.200	16.000	4.450	11.302	Pass
6	0.150	-	0.200	-	0.170	-	N/A
7	3.460	18.375	3.400	18.503	3.500	12.698	Pass
8	0.150	-	0.100	-	0.170	-	N/A
9	4.560	13.125	4.600	35.048	4.600	23.365	Pass
10	0.150	-	0.100	-	0.170	-	N/A
11	5.390	7.875	5.400	68.571	5.410	45.799	Pass
12	0.150	-	0.200	-	0.170	-	N/A
13	4.650	7.875	4.600	58.413	4.670	39.534	Pass
14	0.150	-	0.100	-	0.170	-	N/A
15	2.780	7.875	2.800	35.556	2.830	23.958	Pass
16	0.170	-	0.200	-	0.170	-	N/A
17	1.680	7.875	1.600	20.317	1.700	14.392	Pass
18	0.150	-	0.100	-	0.170	-	N/A
19	1.950	7.875	2.000	25.397	2.000	16.931	Pass
20	0.150	-	0.100	-	0.150	-	N/A
21	1.860	7.875	2.000	25.397	2.110	17.862	Pass
22	0.130	-	0.100	-	0.150	-	N/A
23	1.750	7.875	1.800	22.857	1.880	15.915	Pass
24	0.150	-	0.100	-	0.150	-	N/A
25	1.140	7.875	1.100	13.968	1.160	9.820	Pass
26	0.150	-	0.100	-	0.170	-	N/A
27	0.530	7.875	0.500	6.349	0.580	4.910	Pass
28	0.150	-	0.100	-	0.170	-	N/A
29	0.380	7.875	0.400	5.079	0.400	3.386	Pass
30	0.150	-	0.100	-	0.170	-	N/A
31	0.380	7.875	0.400	5.079	0.400	3.386	Pass
32	0.150	-	0.200	-	0.170	-	N/A
33	0.510	7.875	0.500	6.349	0.580	4.910	Pass
34	0.170	-	0.100	-	0.170	-	N/A
35	0.800	7.875	0.800	10.159	0.800	6.772	Pass
36	0.170	-	0.200	-	0.170	-	N/A
37	0.400	7.875	0.400	5.079	0.490	4.148	Pass
38	0.150	-	0.200	-	0.170	-	N/A
39	0.490	7.875	0.500	6.349	0.510	4.317	Pass
40	0.150	-	0.200	-	0.170	-	N/A





Model	NCWP-1508025-VD
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang

Test Result: **Pass**Source qualification(Power On Load): **Idle - Pass**

THC(mA): 37.470

I - THD(%): 11.8

POHC(mA):5.320

POHC Limit(mA):30.054

Parameter values during test:

V RMS (Volts): 229.7

Frequency(Hz): 50.0

I RMS(mA): 320.0

Crest Factor: 1.307

Power (Watts): 71.7

Power Factor: 0.976

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I Fund	316.800						
2	0.200	6.336	0.200	3.157	0.240	2.525	Pass
3	35.240	85.536	35.500	41.503	35.780	27.887	Pass
4	0.170	-	0.200	-	0.200	-	N/A
5	4.240	31.680	4.200	13.258	4.290	9.028	Pass
6	0.170	-	0.200	-	0.200	-	N/A
7	8.040	22.176	8.000	36.075	8.060	24.230	Pass
8	0.170	-	0.200	-	0.170	-	N/A
9	4.470	15.840	4.500	28.409	4.510	18.981	Pass
10	0.150	-	0.200	-	0.200	-	N/A
11	1.100	9.504	1.100	11.574	1.140	7.997	Pass
12	0.150	-	0.200	-	0.200	-	N/A
13	0.980	9.504	0.900	9.470	0.980	6.874	Pass
14	0.150	-	0.100	-	0.170	-	N/A
15	2.670	9.504	2.600	27.357	2.710	19.010	Pass
16	0.150	-	0.200	-	0.170	-	N/A
17	3.820	9.504	3.800	39.983	3.880	27.217	Pass
18	0.150	-	0.200	-	0.200	-	N/A
19	2.740	9.504	2.600	27.357	2.740	19.220	Pass
20	0.130	-	0.200	-	0.170	-	N/A
21	0.980	9.504	1.000	10.522	1.030	7.225	Pass
22	0.150	-	0.200	-	0.200	-	N/A
23	1.410	9.504	1.600	16.835	1.700	11.925	Pass
24	0.170	-	0.200	-	0.220	-	N/A
25	0.710	9.504	0.600	6.313	0.710	4.980	Pass
26	0.150	-	0.200	-	0.220	-	N/A
27	1.480	9.504	1.400	14.731	1.480	10.382	Pass
28	0.150	-	0.200	-	0.200	-	N/A
29	3.140	9.504	3.200	33.670	3.250	22.797	Pass
30	0.170	-	0.200	-	0.200	-	N/A
31	2.920	9.504	2.900	30.513	3.010	21.114	Pass
32	0.170	-	0.200	-	0.200	-	N/A
33	1.320	9.504	1.400	14.731	1.390	9.750	Pass
34	0.170	-	0.200	-	0.200	-	N/A
35	0.440	9.504	0.400	4.209	0.470	3.297	Pass
36	0.200	-	0.200	-	0.220	-	N/A
37	0.690	9.504	0.800	8.418	0.870	6.103	Pass
38	0.170	-	0.200	-	0.200	-	N/A
39	0.600	9.504	0.600	6.313	0.620	4.349	Pass
40	0.170	-	0.200	-	0.200	-	N/A



Shenzhen Southern LCS Compliance Testing Co., Ltd.

Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



Model	NCWP-1508025-DD
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Aru Yang

Test Result: **Pass**Source qualification(Power On Load): **Idle - Pass**

THC(mA): 19.850

I - THD(%): 6.2

POHC(mA):6.850

POHC Limit(mA):30.538

Parameter values during test:

V_RMS (Volts): 229.7

Frequency(Hz): 50.0

I_RMS(mA): 322.8

Crest Factor: 1.388

Power (Watts): 72.5

Power Factor: 0.977

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I_Fund	321.900						
2	0.440	6.438	0.500	7.766	0.530	5.488	Pass
3	10.940	86.913	10.900	12.541	11.010	8.445	Pass
4	0.310	-	0.300	-	0.380	-	N/A
5	8.270	32.190	8.300	25.784	8.310	17.210	Pass
6	0.470	-	0.500	-	0.510	-	N/A
7	4.420	22.533	4.400	19.527	4.420	13.077	Pass
8	0.330	-	0.400	-	0.380	-	N/A
9	6.420	16.095	6.500	40.385	6.510	26.965	Pass
10	0.470	-	0.500	-	0.530	-	N/A
11	5.460	9.657	5.400	55.918	5.500	37.969	Pass
12	0.290	-	0.300	-	0.330	-	N/A
13	2.760	9.657	2.700	27.959	2.780	19.192	Pass
14	0.530	-	0.600	-	0.620	-	N/A
15	5.480	9.657	5.500	56.954	5.550	38.314	Pass
16	0.240	-	0.200	-	0.260	-	N/A
17	4.830	9.657	4.800	49.705	4.850	33.482	Pass
18	0.470	-	0.500	-	0.600	-	N/A
19	2.060	9.657	2.100	21.746	2.180	15.050	Pass
20	0.240	-	0.300	-	0.310	-	N/A
21	1.050	9.657	1.100	11.391	1.210	8.353	Pass
22	0.310	-	0.300	-	0.350	-	N/A
23	5.030	9.657	5.100	52.811	5.140	35.484	Pass
24	0.350	-	0.400	-	0.440	-	N/A
25	2.940	9.657	2.900	30.030	2.980	20.572	Pass
26	0.470	-	0.500	-	0.530	-	N/A
27	1.700	9.657	1.700	17.604	1.730	11.943	Pass
28	0.330	-	0.300	-	0.380	-	N/A
29	1.390	9.657	1.400	14.497	1.390	9.596	Pass
30	0.650	-	0.700	-	0.740	-	N/A
31	0.490	9.657	0.500	5.178	0.510	3.521	Pass
32	0.290	-	0.300	-	0.350	-	N/A
33	0.830	9.657	0.900	9.320	0.960	6.627	Pass
34	0.510	-	0.500	-	0.580	-	N/A
35	1.320	9.657	1.300	13.462	1.410	9.734	Pass
36	0.290	-	0.300	-	0.350	-	N/A
37	0.510	9.657	0.500	5.178	0.530	3.659	Pass
38	0.470	-	0.500	-	0.510	-	N/A
39	1.730	9.657	1.700	17.604	1.770	12.219	Pass
40	0.260	-	0.300	-	0.330	-	N/A



Shenzhen Southern LCS Compliance Testing Co., Ltd.

Room 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

**A.5. IMMUNITY TEST RESULTS**

ELECTROSTATIC DISCHARGE TEST RESULTS					
Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD		Temperature	23.5℃	
Test mode	Mode 1		Humidity	52%	
Input voltage	AC 230V,50Hz		Pressure	1008mbar	
Test engineer	Aru Yang				
Discharge Mode	Test Points	Test Valtage (kV) & polarity	Number of discharges/polarity	Discharge interval (s)	Performance Criteria
Contact Discharge	Conductive surfaces	± 4	10	1	B
Air Discharge	Insulating surfaces	± 2&4&8	10	1	B
VCP	-	± 4	10	1	B
HCP	-	± 4	10	1	B
Note :					

RADIO-FREQUENCY ELECTROMAGNETIC FIELD TEST RESULTS				
Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD		Temperature	24.5℃
Test mode	Mode 1		Humidity	53%
Input voltage	AC 230V,50Hz		Pressure	1008mbar
Test engineer	Aru Yang			
Angle of EUT	Antenna polarization	Frequency Range	Test Level	Performance Criteria
0°	Vertical, Horizontal	80 - 1000 MHz	3 V/m	A
90°	Vertical, Horizontal	80 - 1000 MHz	3 V/m	A
180°	Vertical, Horizontal	80 - 1000 MHz	3 V/m	A
270°	Vertical, Horizontal	80 - 1000 MHz	3 V/m	A
Note : (1) Modulation:1kHz, 80% AM.				



**ELECTRICAL FAST TRANSIENT/BURST TEST RESULTS**

Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD		Temperature	24.0℃
Test mode	Mode 1		Humidity	54%
Input voltage	AC 230V,50Hz		Pressure	1008mbar
Test engineer	Aru Yang			
Port under test	Test Level&polarity	Repetition Frequency	Test duration /polarity	Performance Criteria
AC input power	± 1 kV	5 kHz	2min	B
DC input power				
Signal/control/load				
Note :				

INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE) TEST RESULTS

Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD		Temperature	24.0℃
Test mode	Mode 1		Humidity	54%
Input voltage	AC 230V,50Hz		Pressure	1008mbar
Test engineer	Aru Yang			
Port under test	Test Level	Coupling method	Dwell time	Performance Criteria
AC input power	3 V	CDN	1 seconds	A
DC input power				
Signal/control				
Note: (1) Frequency range:0.15MHz - 80MHz.				



**SURGE TEST RESULTS**

Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD			Temperature	24.0℃	
Test mode	Mode 1			Humidity	54%	
Input voltage	AC 230V,50Hz			Pressure	1008mbar	
Test engineer	Aru Yang					
Port under test	Coupling	Test Level & polarity(kV)	Phase angle (°)	Number of surges	Repetition rate(s)	Performance criteria
AC Input power	L - N	+ 1	90	5	60	C
		- 1	270	5	60	C
	L - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
	N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
	L&N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
Note:						

VOLTAGE DIPS AND SHORT INTERRUPTIONS TEST RESULTS

Test model	NCP1-1506030-VD-M, NCWP-1508025-VD, NCWP-1508025-DD			Temperature	24.0℃
Test mode	Mode 1			Humidity	54%
Input voltage	AC 230V,50Hz			Pressure	1008mbar
Test engineer	Aru Yang				
U _{NOM} (Vac)	Test Level (% U _{NOM})	Number of periods		Phase angle (°)	Performance criteria
		50Hz	60Hz		
	230	70	10	12	0, 90, 180, 270
	0	0,5	0,5	0	B
Note:					





ANNEX B - TEST PHOTOS

B.1. Conducted Disturbance




B.2. Radiated Disturbance (9kHz - 30MHz)






B.3. Radiated Disturbance (30MHz to 1GHz) & Radio-Frequency Electromagnetic Fields

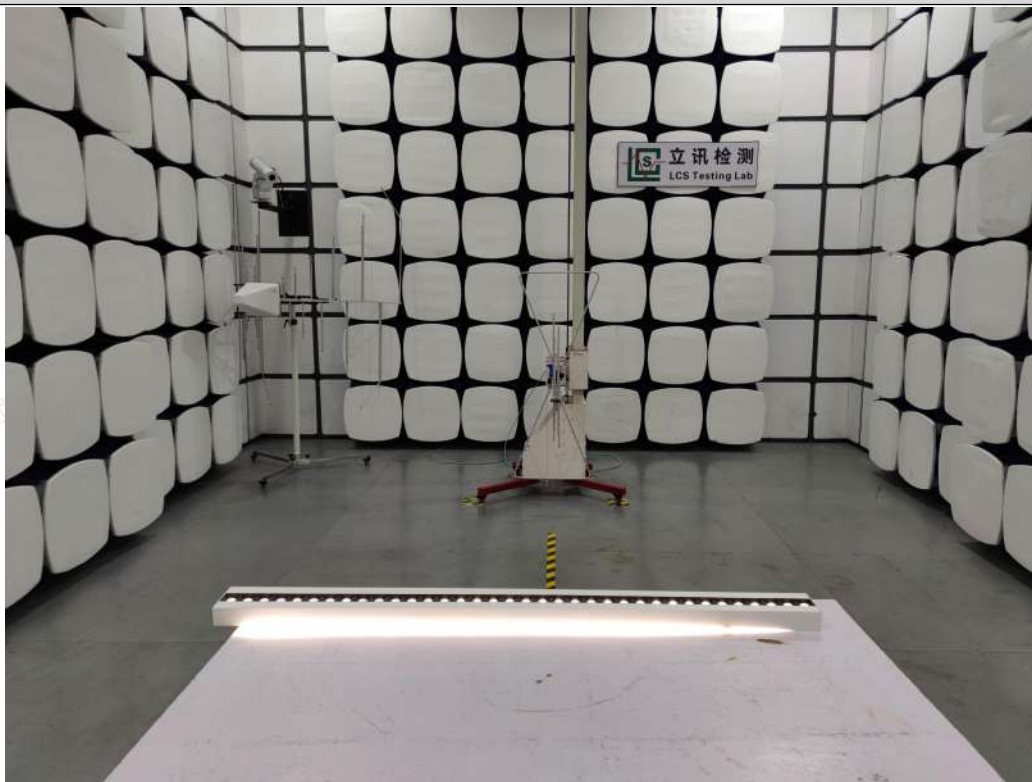


B.4. Harmonic Current

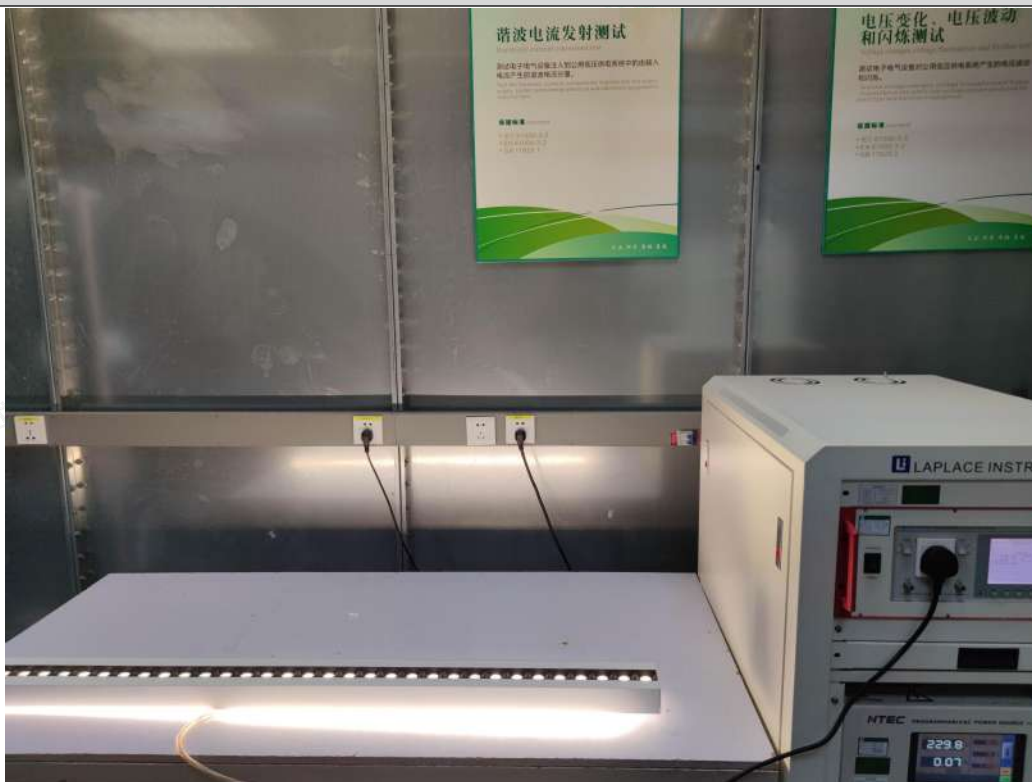




B.5. Electrostatic Discharge

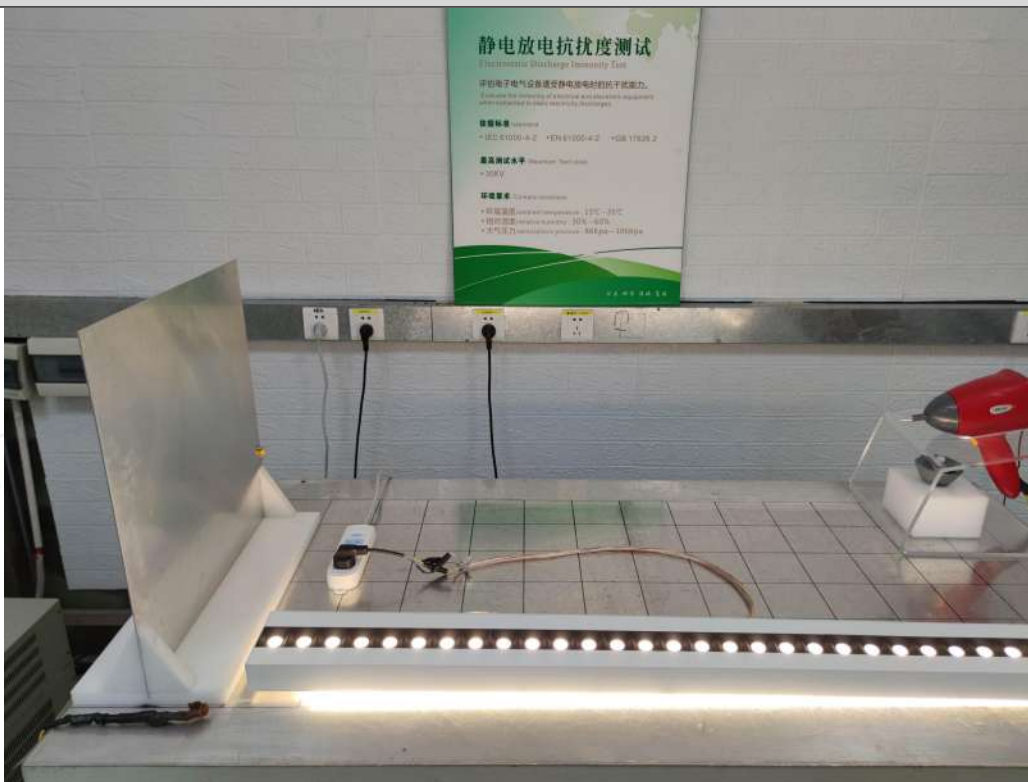

B.6. Electrical Fast Transient / Burst

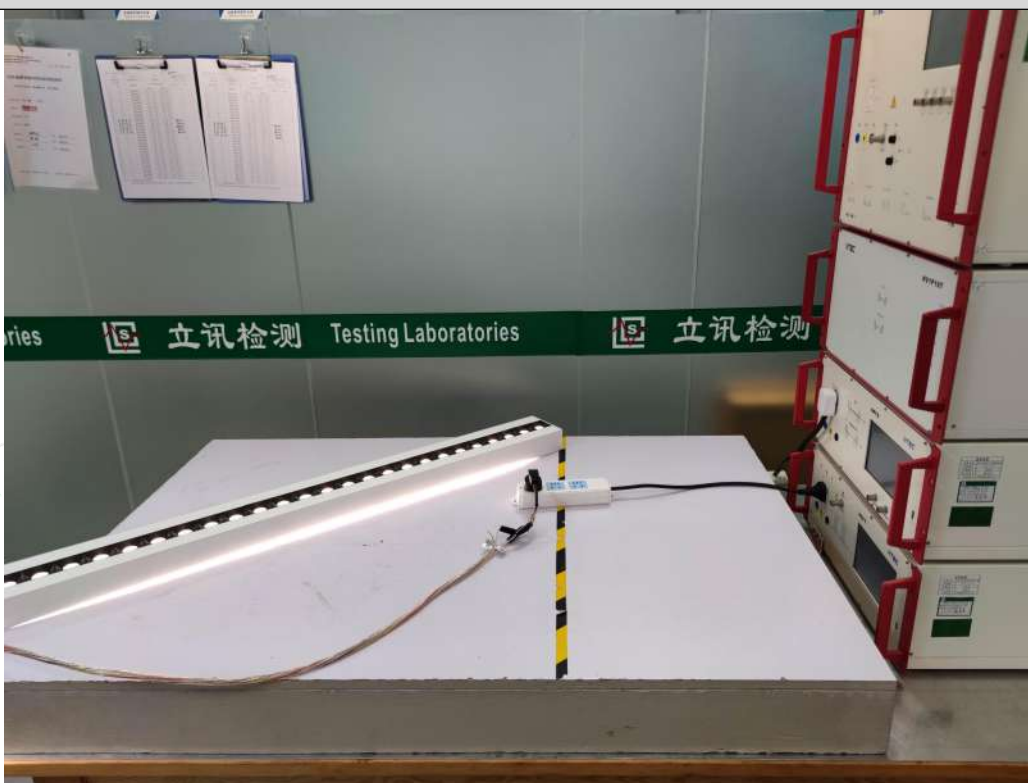



B.7. Injected Currents (Radio-Frequency Common Mode)




B.8. Surge





B.9. Voltage Dips and Short Interruptions

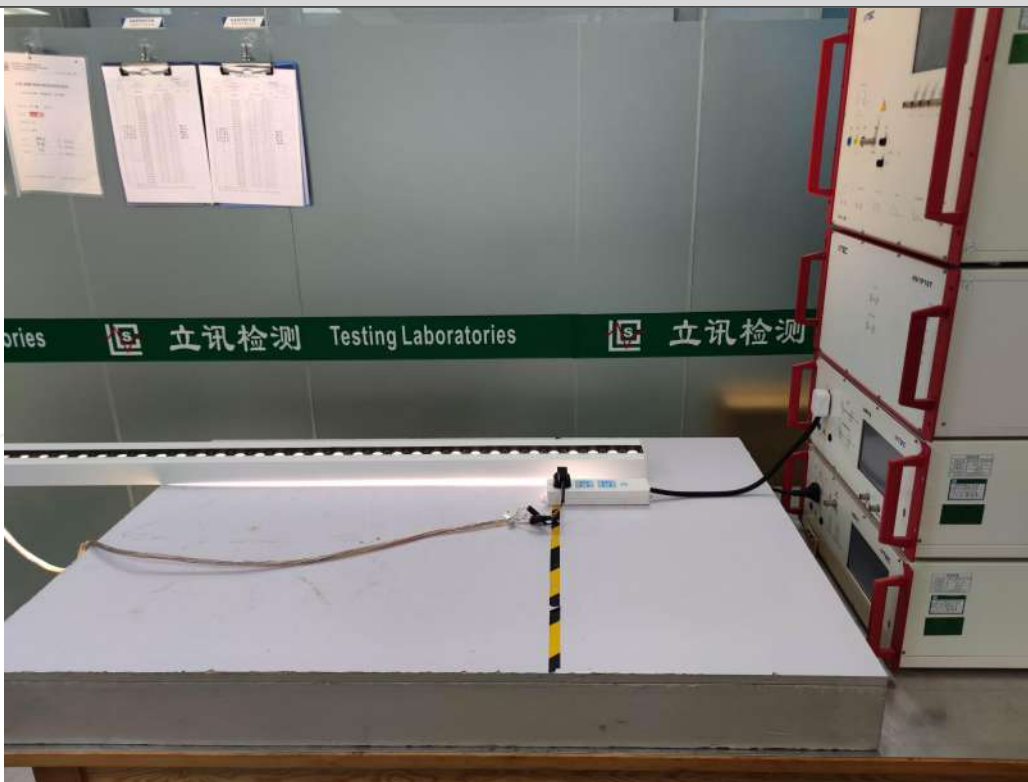



ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT

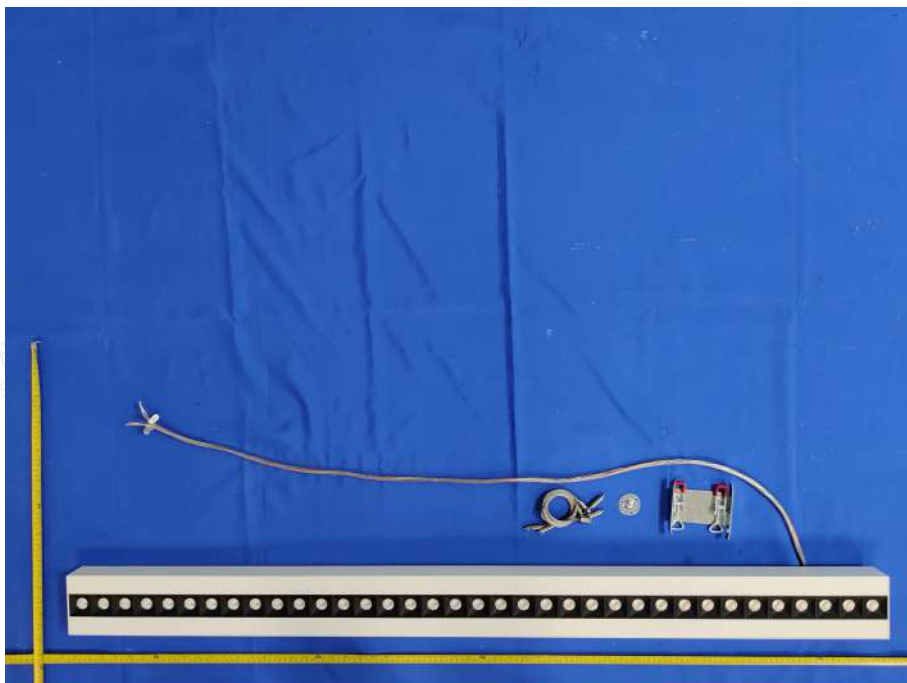


Photo.1

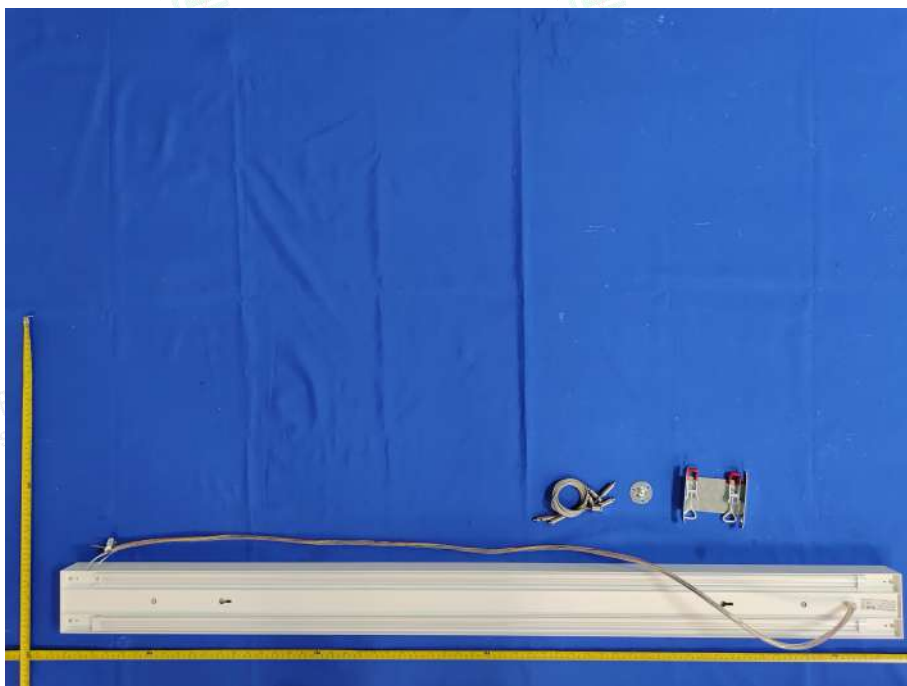


Photo.2



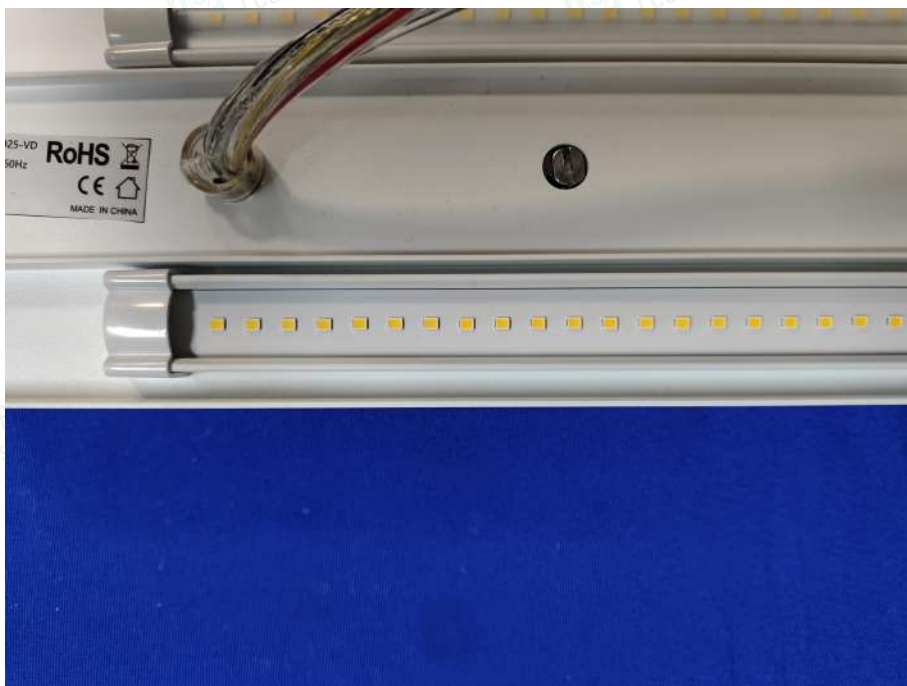


Photo.3

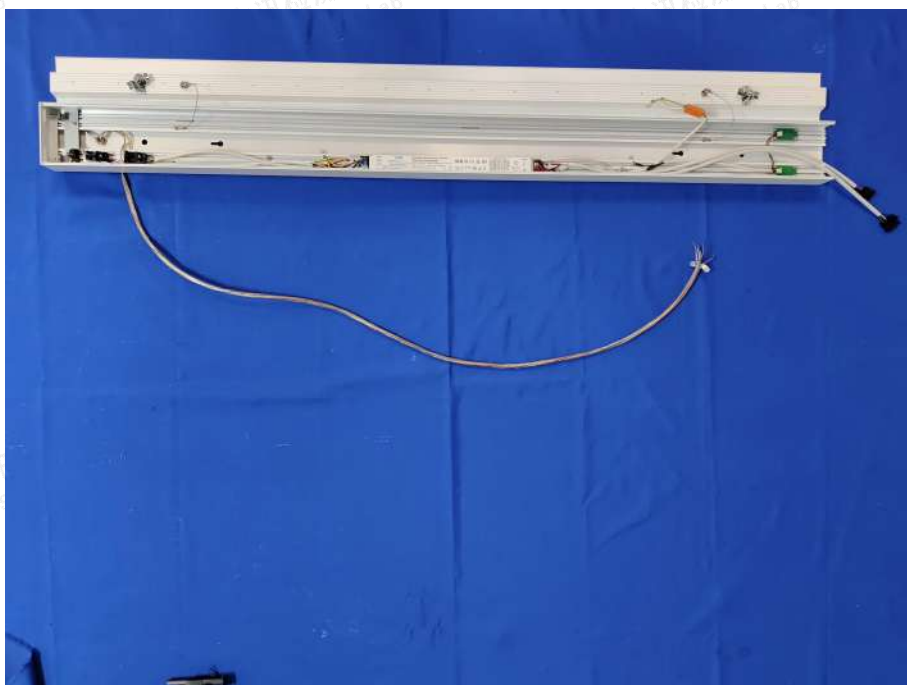


Photo.4





Photo.5



Photo.6





Photo.7



Photo.8



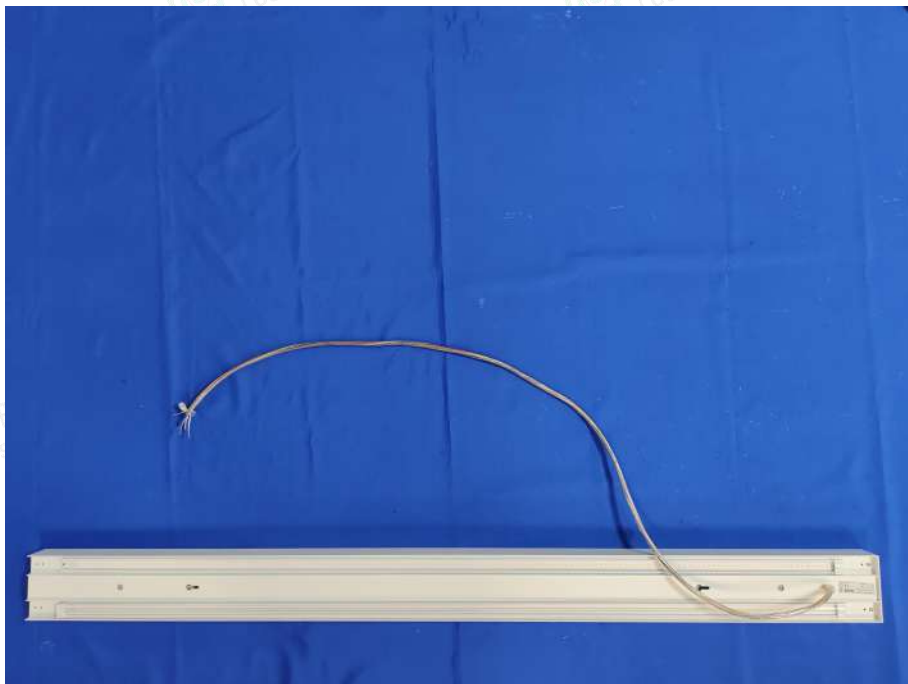


Photo.9



Photo.10





Photo.11



Photo.12 NCP1-1506030-VD-M



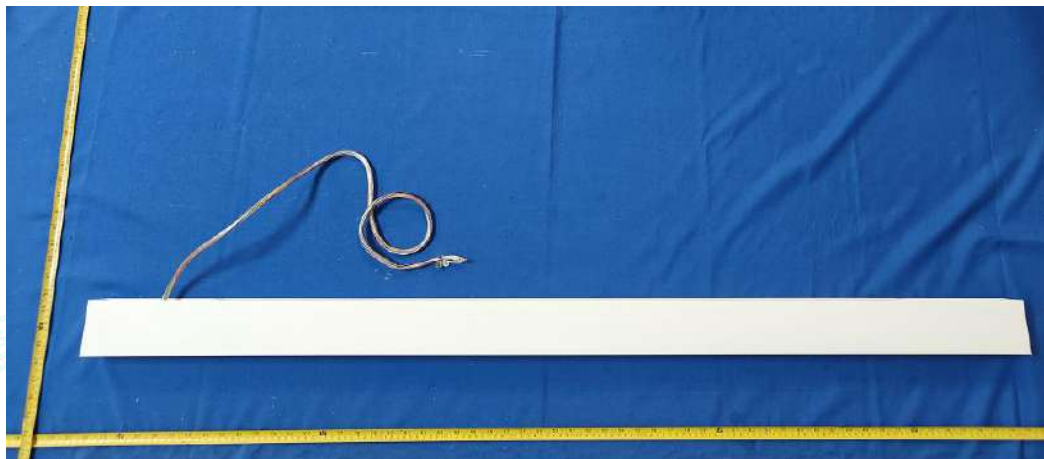


Photo.13

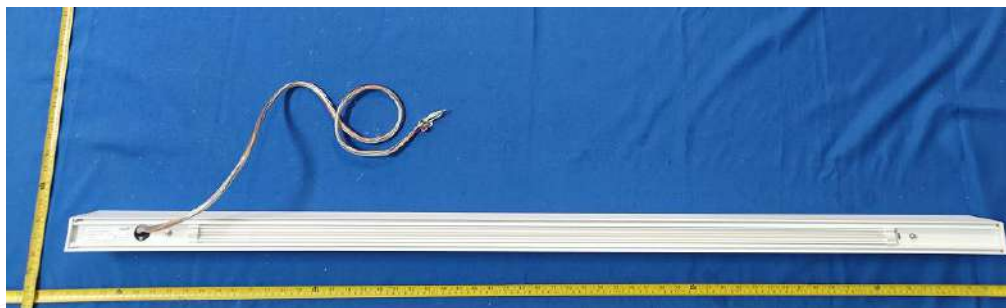


Photo.14



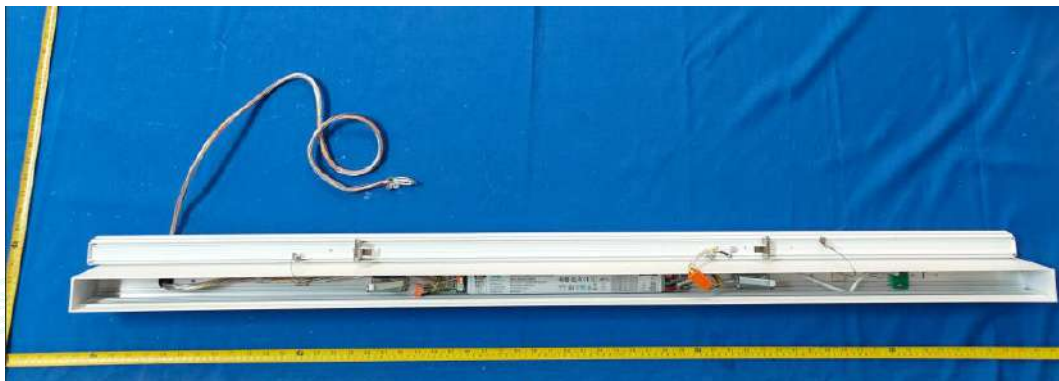


Photo.15



Photo.16





Photo.17



Photo.18





Photo.19

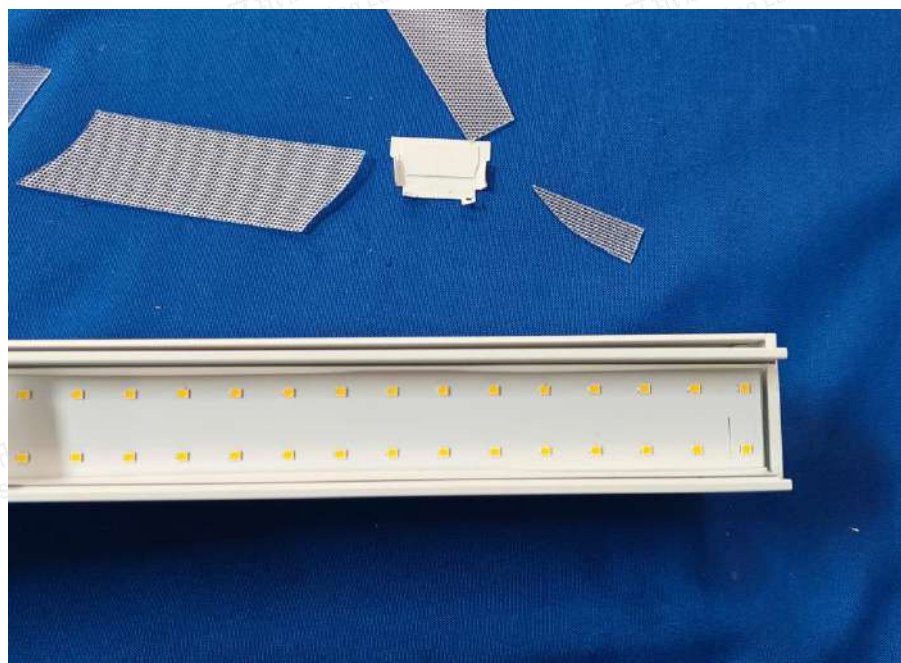


Photo.20





Photo.21

----- END -----

